

TRANSFER PLUG , PASSIV

UFL 40-pole

Ribbon cable connector

40-pole



Spring clamp terminals

Via the combined fixing mechanism, connectors with or without strain relief can be connected.

for plugs with or without strain relief (DIN 41651); for plugs with strain relief, it may be necessary to remove the bottom hook

[Link to Product](#)

Illustration

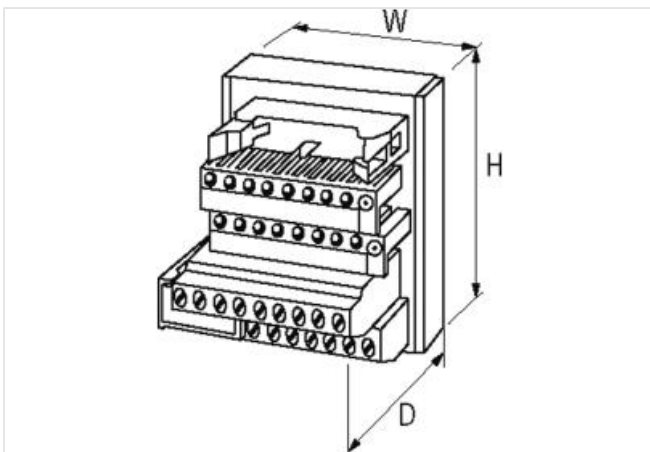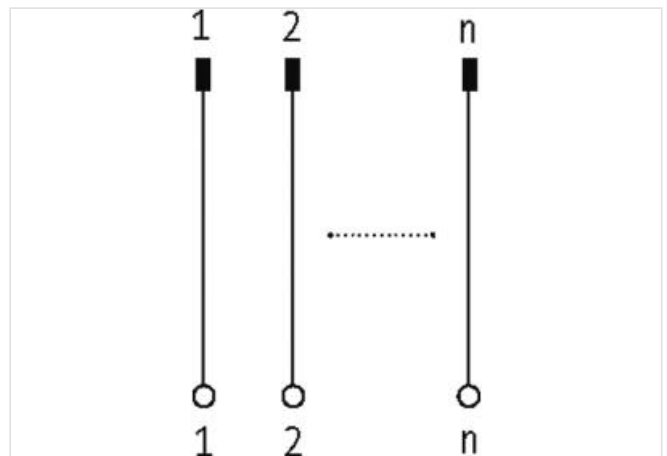

Product may differ from Image

Commercial data

ECLASS-6.0	27260710
ECLASS-6.1	27260708
ECLASS-7.0	27141152
ECLASS-8.0	27141152
ECLASS-9.0	27141152
ECLASS-10.1	27141152
ECLASS-11.1	27141152
ECLASS-12.0	27141152
ETIM-5.0	EC001283

The information in this Product-PDF has been compiled with the utmost care.

Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 2024-06-24

Murrelektronik ApS | Alexander Foss Gade 13, 1. | 9000 Aalborg | Fon +45 96 35 06 06 | Fax | shop@murrelektronik.dk | shop.murrelektronik.dk

customs tariff number	85366990
GTIN	4048879023887
Packaging unit	10

Electrical data | Supply

Operating voltage DC	24 V
Operating current max.	1 A

Installation | Connection

Connection	Spring clamp terminals FK
------------	---------------------------

Device protection | Electrical

Pollution Degree	2
Overvoltage category (EN 60664-1)	III

Mechanical data | Mounting data

Mounting method	geschnappt
Suitable for mounting type	mounting rail, (EN 60715)
Height	75 mm
Width	70 mm
Depth	70 mm

Environmental characteristics | Climatic

Operating temperature min.	-20 °C
Operating temperature max.	70 °C