

MOTOR SUPPRESSOR



RC, 3x400...575VAC/4kW

3× 400 V AC
3× 575 V AC
RC

Suppressors for other voltages, frequencies, and motor ratings available on request. Do not use RC motor suppressors with frequency inverters.

Link to Product

Illustration

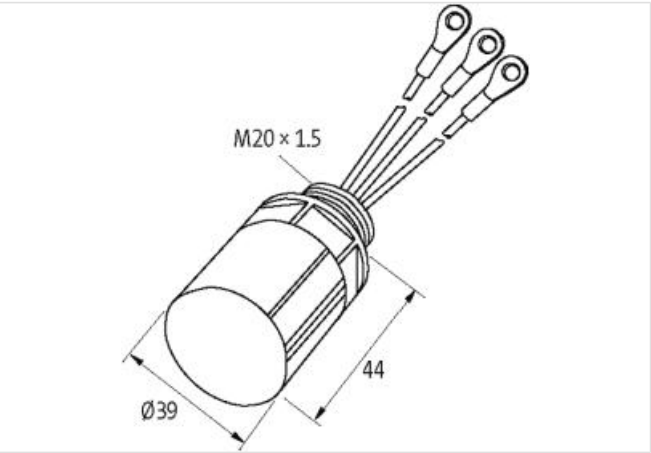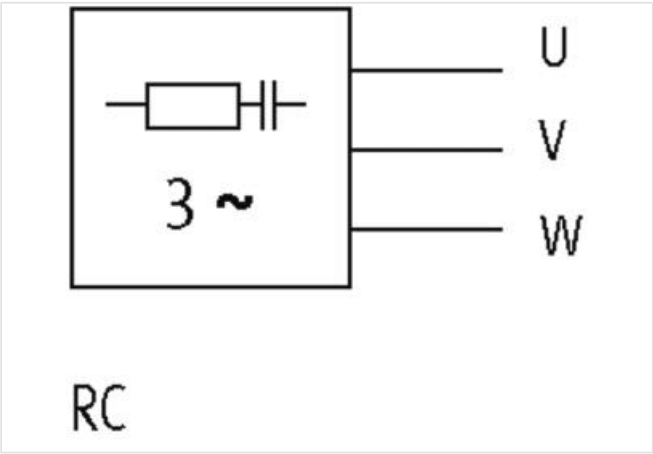

Product may differ from Image



| Commercial data | |
|-----------------|----------|
| ECLASS-6.0 | 27371013 |
| ECLASS-6.1 | 27371013 |
| ECLASS-7.0 | 27371013 |
| ECLASS-8.0 | 27371013 |
| ECLASS-9.0 | 27371013 |

| | |
|-----------------------|---------------|
| ECLASS-10.1 | 27371013 |
| ECLASS-11.1 | 27371013 |
| ECLASS-12.0 | 27371013 |
| ETIM-5.0 | EC000197 |
| customs tariff number | 85363010 |
| GTIN | 4048879019149 |
| Packaging unit | 1 |

Electrical data | Supply

| | |
|-----------------|--------------|
| Power frequency | 50 ... 60 Hz |
|-----------------|--------------|

Electrical data | Input

| | |
|------------------|-------|
| Input voltage AC | 575 V |
|------------------|-------|

Installation

| | |
|-------------------------------|-------------------|
| Connection cross section max. | 1 mm ² |
|-------------------------------|-------------------|

Installation | Connection

| | |
|------------------------|----------------|
| Connection information | Single strands |
| Length single strands | 150 mm |
| Ring terminals | M6isolated |

Device protection | Media

| | |
|------------------|-----------------|
| Flame resistance | flame retardant |
|------------------|-----------------|

Mechanical data | Material data

| | |
|-------------------------------------|-------------------|
| Combustibility class housing (UL94) | V-0 |
| Material housing | Plastic |
| Material potting compound | 2-component epoxy |

Mechanical data | Mounting data

| | |
|----------------------------|------------------|
| Mounting method | inserted |
| Suitable for mounting type | Motorklemmkasten |
| Height | 39 mm |
| Width | 39 mm |
| Depth | 44 mm |

Environmental characteristics | Climatic

| | |
|----------------------------|--------|
| Operating temperature min. | -20 °C |
| Operating temperature max. | 60 °C |