

MASI20 INSTALLATION TECHNOL.


Plug terminal for AS-Interface profile cable

Plug terminal for bus or power distributor

Link to Product

Illustration



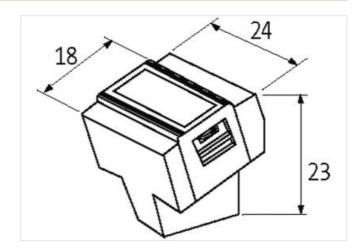

Product may differ from Image

Commercial data		
ECLASS-6.0	27141106	
ECLASS-6.1	27141104	
ECLASS-7.0	27141104	
ECLASS-8.0	27141104	
ECLASS-9.0	27141104	
ECLASS-10.1	27141104	
ECLASS-11.1	27141104	
ECLASS-12.0	27141104	
ETIM-5.0	EC001583	
customs tariff number	85369010	
GTIN	4048879050517	
Packaging unit	1	
Electrical data Supply		
Operating voltage DC max.	36 V	
Total current max.	8 A	
Mechanical data Mounting data		
Height	23 mm	
Width	24 mm	
Depth	18 mm	
Environmental characteristics Cli	natic	
Operating temperature min.	-20 °C	
Operating temperature max.	70 °C	
Storage temperature min.	-40 °C	
Storage temperature max.	80 °C	
Connection type 1		
Connection	Screw terminals SK	

The information in this Product-PDF has been compiled with the utmost care. Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 2024-05-05



Family construction form	terminal	
Gender	female	
Color contact carrier	green	
No. of poles	2	
PIN 1	+	
PIN 2	-	