

## MKS/BCD-1300 DIODE MODULES


Mounting rail / screw-type terminal


Universal diode 1 300 V, 1 A Diode logic for converting hexadecimal to binary numbers

## **Link to Product**

## Illustration



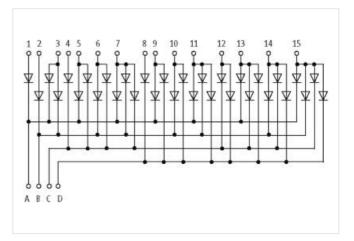



Product may differ from Image





Commercial data		
ECLASS-6.0	27371010	
ECLASS-6.1	27371010	
ECLASS-7.0	27371010	
ECLASS-8.0	27371010	
ECLASS-9.0	27371010	
ECLASS-10.1	27371010	
ECLASS-11.1	27371010	
ECLASS-12.0	27371010	

The information in this Product-PDF has been compiled with the utmost care.
Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 2024-05-02



stay connected

ETIM-5.0	EC002780	
customs tariff number	85411000	
GTIN	4048879041829	
Packaging unit	1	
Mechanical data   Mounting data		
Mounting method	geschnappt	
Suitable for mounting type	Mounting rail TH35, G32, (EN 60715)	
Height	86 mm	
Width	67,5 mm	
Depth	62 mm	
Environmental characteristics   Climatic		
Operating temperature min.	-20 °C	
Operating temperature max.	60 °C	
Connection type 2		
Connection	Screw terminals SK	
Family construction form	terminal	
Gender	female	
No. of poles	4	
PIN 1	D	
PIN 2	С	
PIN 3	В	
PIN 4	A	
Connection	Screw terminals SK	
Family construction form	terminal	
Gender	female	
No. of poles	15	