

EUROCARD HOLDER

SKP 32 IC (ST)

Screw terminals

32-pole C (EN 60603)

Row a, c

250 V AC

With the vertical snap adapter SASA 135 Art.-No. 63900 the holder can be mounted at right-angles on the rail.


The D2 size is for a card without a front plate.

Double row terminals on one side row for "a"

To insert the card first press down the 2 yellow buttons. Then slide the Eurocard into the guide slots pushing until fully engaged. The card is now locked into position. It can be removed by pressing down on the 2 yellow buttons.

[Link to Product](#)

Illustration

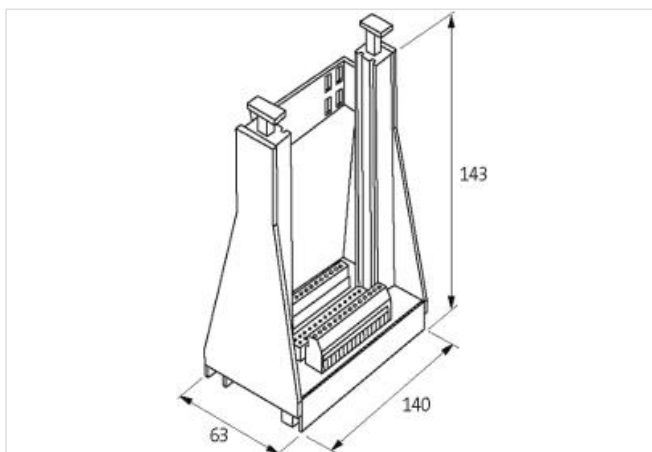

Product may differ from Image



Commercial data

ECLASS-6.0

27260710

| | |
|-----------------------|---------------|
| ECLASS-6.1 | 27260704 |
| ECLASS-7.0 | 27440402 |
| ECLASS-8.0 | 27440402 |
| ECLASS-9.0 | 27440402 |
| ECLASS-10.1 | 27440402 |
| ECLASS-11.1 | 27460201 |
| ECLASS-12.0 | 27460201 |
| ETIM-5.0 | EC002780 |
| customs tariff number | 85366990 |
| GTIN | 4048879040013 |
| Packaging unit | 1 |

Electrical data | Supply

| | |
|------------------------|-------|
| Operating voltage AC | 250 V |
| Operating current max. | 2 A |

Installation

| | |
|-------------------------------------|-------------------|
| Connection cross-section solid max. | 4 mm ² |
|-------------------------------------|-------------------|

Installation | Pin assignment

| | |
|--------------|----|
| No. of poles | 32 |
|--------------|----|

Device protection | Electrical

| | |
|-----------------------------------|---|
| Overvoltage category (EN 60664-1) | I |
|-----------------------------------|---|

Device protection | Media

| | |
|------------------|-----------------|
| Flame resistance | flame retardant |
|------------------|-----------------|

Mechanical data

| | |
|--------------------------|--------------|
| Type of socket connector | C (EN 60603) |
|--------------------------|--------------|

Mechanical data | Material data

| | |
|------------------|---------|
| Material housing | Plastic |
|------------------|---------|

Mechanical data | Mounting data

| | |
|----------------------------|---------------------------|
| Mounting method | screwed, geschnappt |
| Suitable for mounting type | mounting rail, (EN 60715) |
| Height | 137 mm |
| Width | 63 mm |
| Depth | 170 mm |