


MODLINK MSDD DBL COMBI INSERT FRANCE

1xRJ45 fem./fem. + RCD opening

- 1 × France (UTE-NF) white
- 1 × RJ45, 8-pole metal, CAT5e (female/female)
- 1 × FI cut-out

Link to Product

Illustration

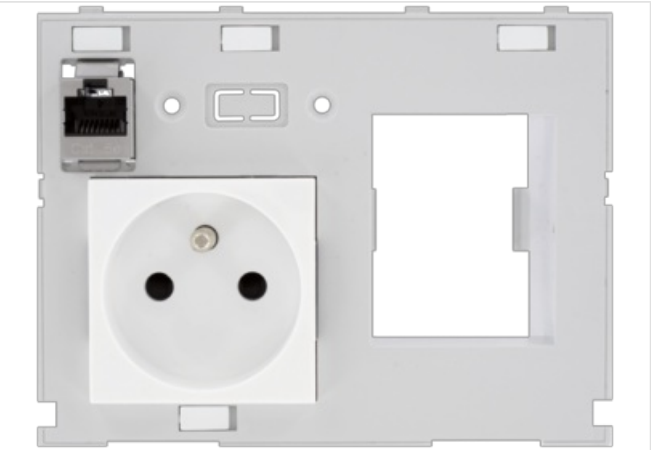

Product may differ from Image



| Commercial data                          |                  |
|------------------------------------------|------------------|
| ECLASS-6.0                               | 27189217         |
| ECLASS-6.1                               | 27189217         |
| ECLASS-7.0                               | 27189217         |
| ECLASS-8.0                               | 27189217         |
| ECLASS-9.0                               | 27182806         |
| ECLASS-10.1                              | 27182806         |
| ECLASS-11.1                              | 27182806         |
| ECLASS-12.0                              | 27182806         |
| ETIM-5.0                                 | EC000020         |
| customs tariff number                    | 85366990         |
| GTIN                                     | 4048879384513    |
| Packaging unit                           | 1                |
| Mechanical data   Mounting data          |                  |
| Height                                   | 88 mm            |
| Width                                    | 116 mm           |
| Depth                                    | 70 mm            |
| Environmental characteristics   Climatic |                  |
| Storage temperature min.                 | 5 °C             |
| Storage temperature max.                 | 40 °C            |
| Shielding plate                          |                  |
| Connection information                   | Threaded hole M4 |

Tightening torque 0,9 Nm

**France (UTE-NF)**

|                               |                    |
|-------------------------------|--------------------|
| Connection cross section max. | 4 mm <sup>2</sup>  |
| AWG number max.               | 12                 |
| Operating voltage AC          | 250 V              |
| Operating current             | 16 A               |
| Connection                    | Screw terminals SK |
| No. of poles                  | 2 + PE             |
| Connections per pole          | 2                  |
| Protection contact present    | yes                |

**RJ45**

|                                       |                   |
|---------------------------------------|-------------------|
| Operating voltage AC max. (UL-listed) | 30 V              |
| Operating voltage DC max. (UL-listed) | 42,4 V            |
| Current operating max. (UL)           | 175 mA            |
| Family construction form              | RJ45              |
| Family type Back side                 | RJ45              |
| Cable category min.                   | Cat5e             |
| Looking techniques                    | Snap-in connector |