

EOL - MODLIGHT70 CONNECTION MODULE 8 POLE M12 SIDE EXIT

Product discontinued


Basic + buzzer + flash
with M12 connection
with magnet base

[Link to Product](#)

Illustration



Product may differ from Image

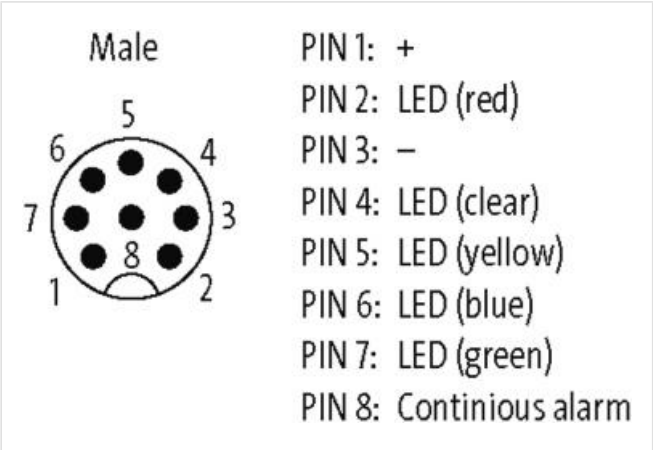

| Technical Data | |
|--------------------------------|-----------------------------------|
| Operating voltage | 24 V DC (21.6...26.4 V DC) |
| Buzzer (infinitely adjustable) | Continuous and intermittent alarm |
| Sound pressure level | 70 ±5...90 ±5 dB |
| Blink cycles | 60 ±12 per minute |
| Adhesive force | 290 N (depending on surface) |
| General data | |
| Protection | IP65 inserted and tightened |
| Connection | M12 (8-pole) |
| Housing | Black plastic |
| Dimensions H×W×D | 220.5×70×70 mm |
| Temperature range | -30...+60 °C |
| Commercial data | |
| customs tariff number | 85319000 |
| GTIN | 4048879030748 |
| Packaging unit | 1 |