
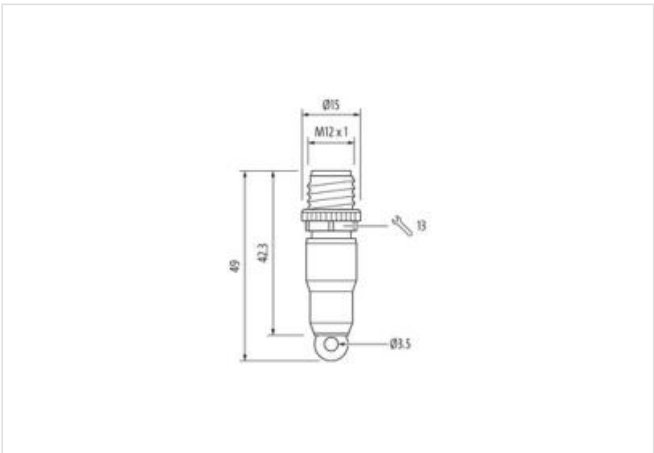
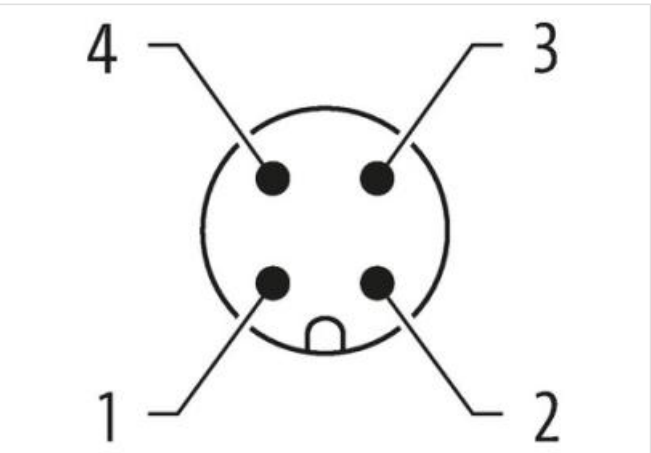


M12 MALE 0° CODING PLUG JUMPER 1-4

Terminating plug
Male M12
4-pole (bridged)

Link to Product

Illustration

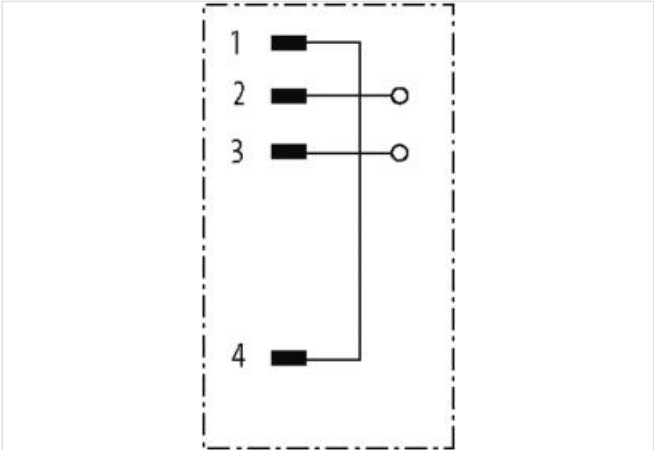

Product may differ from Image

| Side 1 | |
|-------------------------------------|-------------------|
| Mounting method | inserted, screwed |
| Family construction form | M12 |
| Coding | A |
| No. of poles | 4 |
| Width across flats | SW13 |
| Degree of protection (EN IEC 60529) | IP67 |
| Commercial data | |
| ECLASS-6.0 | 23111190 |
| ECLASS-6.1 | 27260702 |
| ECLASS-7.0 | 27440390 |
| ECLASS-8.0 | 27440190 |
| ECLASS-9.0 | 27440190 |
| ECLASS-10.1 | 27440190 |

| | |
|-----------------------|---------------|
| ECLASS-11.1 | 27440190 |
| ECLASS-12.0 | 27440190 |
| ETIM-5.0 | EC001855 |
| customs tariff number | 85366990 |
| GTIN | 4048879714303 |
| Packaging unit | 1 |

Electrical data | Supply

| | |
|------------------------------------|------|
| Operating voltage AC max. | 30 V |
| Operating voltage DC max. | 30 V |
| Current operating per contact max. | 4 A |

Installation | Connection

| | |
|-------------------|--------|
| Tightening torque | 0,6 Nm |
|-------------------|--------|

Device protection | Electrical

| | |
|--|-------------------|
| Additional condition protection degree | inserted, screwed |
| Pollution Degree | 3 |
| Rated surge voltage | 0,8 kV |
| Material group (IEC 60664-1) | I |

Mechanical data | Material data

| | |
|------------------|------------------|
| Coating locking | Nickel |
| Locking material | Zinc die-casting |

Mechanical data | Mounting data

| | |
|-----------------|---------------------------------------|
| Mounting method | inserted, screwed, Shaking protection |
|-----------------|---------------------------------------|

Environmental characteristics | Climatic

| | |
|----------------------------|--------|
| Operating temperature min. | -25 °C |
| Operating temperature max. | 85 °C |

Conformity

| | |
|------------------|--------------------------|
| Product standard | DIN EN 61076-2-101 (M12) |
|------------------|--------------------------|