

**M12 male recept. A-cod. rear**

PVC 5x0.34 gy UL/CSA 2m

Flange male



M12, 5-pole

Rear mounting



With open ended wires

Further cable lengths on request.

The resistance to aggressive media should be individually tested for your application. Further details on request.

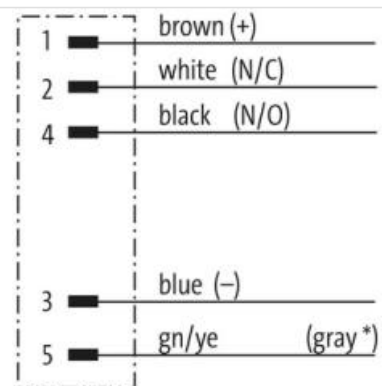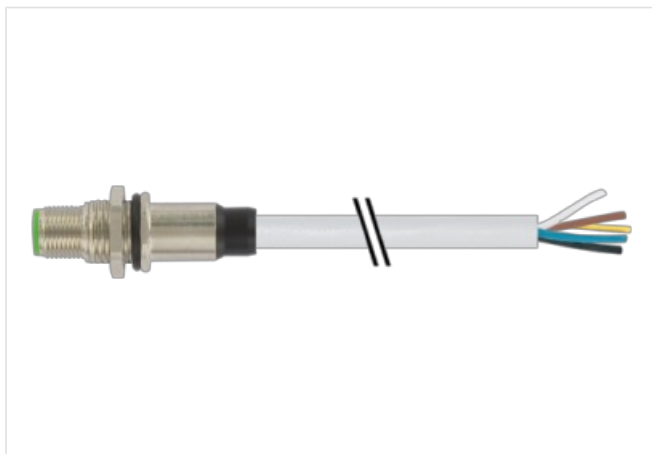[Link to Product](#)**Illustration**

(\* for cable type 126, 732, 219, 619)

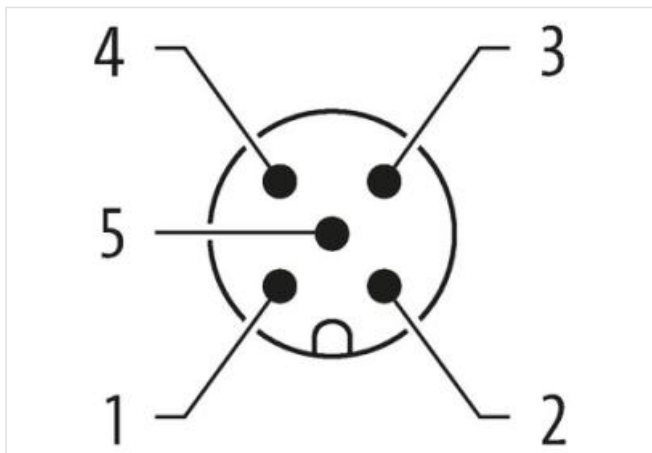



Product may differ from Image



|                                     |                    |
|-------------------------------------|--------------------|
| Cable length                        | 2 m                |
| Side 1                              |                    |
| Tightening torque                   | 0,6 Nm             |
| Mounting method                     | inserted, screwing |
| Coating contact                     | gold plated        |
| Family construction form            | M12                |
| Thread                              | M12 x 1            |
| Coding                              | A                  |
| Material contact                    | Copper alloy       |
| Material                            | Brass              |
| No. of poles                        | 5                  |
| Degree of protection (EN IEC 60529) | IP67               |
| Side 2                              |                    |
| Stripping length (jacket)           | 20 mm              |
| Commercial data                     |                    |
| ECLASS-6.0                          | 27279220           |
| ECLASS-6.1                          | 27279220           |
| ECLASS-7.0                          | 27440103           |
| ECLASS-8.0                          | 27440103           |
| ECLASS-9.0                          | 27440103           |
| ECLASS-10.1                         | 27440103           |
| ECLASS-11.1                         | 27440103           |
| ECLASS-12.0                         | 27440103           |
| ETIM-5.0                            | EC001855           |
| customs tariff number               | 85444290           |
| GTIN                                | 4048879753463      |
| Packaging unit                      | 1                  |
| Electrical data   Supply            |                    |
| Operating voltage AC max.           | 125 V              |
| Operating voltage DC max.           | 125 V              |
| Current operating per contact max.  | 4 A                |
| Diagnostics                         |                    |

Status indication LED no

#### Installation | Connection

Stripping length (jacket) 20 mm

Mounting set M16 x 1.5

Width across flats SW19

#### Device protection | Electrical

Protection NEMA 3, 4, 6P

Additional condition protection degree inserted, screwed

Pollution Degree 3

Rated surge voltage 1,5 kV

Material group (IEC 60664-1) I

#### Mechanical data | Material data

Coating locking nickel plated

Coating of fitting nickel plated

Locking material Brass

Material screw connection Brass

#### Mechanical data | Mounting data

Mounting method Schraubgewinde

Looking techniques Schraubgewinde

#### Environmental characteristics | Climatic

Operating temperature min. -25 °C

Operating temperature max. 85 °C

Additional condition temperature range depending on cable quality

#### Important installation notes

Note on strain relief Protect the connectors by suitable measures from mechanical loads, e.g. by the usage of cable ties.

Note on bending radius **Attention:** Observe the permissible bending radii when laying cables, as the IP protection class can be endangered by excessive bending forces.

#### Approvals

UL 50E yes

#### Installation | Cable

Cable identification 215

Cable Type 1

Jacket Color gray

Type of Certificate cURus

Amount stranding 1

Stranding 5 wires around Core filler twisted

Filler yes

wire arrangement brown, black, blue, white, green-yellow

Cable weight 48,4 g/m

Material jacket PVC

Shore hardness jacket 85 ± 5 Shore A

Freedom from ingredients (jacket) lead-free, cadmium-free, CFC-free, silicone-free

Outer-diameter (jacket) 5,2 mm

Tolerance outer diameter (sheath) ± 5 %

Material wire insulation PVC

Amount wires 5

Outer diameter insulation 1,25 mm

Outer diameter tolerance core insulation ± 5 %

Shore hardness wire insulation 45 ± 5 Shore D

Material properties wire insulation good machinability

Ingredient freeness wire insulation lead-free, cadmium-free, CFC-free, silicone-free

|   |  |
|---|--|
| Amount strands (wire)                             | 19   |
| Diameter of single wires                          | 0,15 mm  |
| Conductor crosssection (wire)                     | 0,34 mm <sup>2</sup>                                 |
| Material conductor wire                           | Stranded copper wire, bare                           |
| Conductor type (wire)                             | Strand class 5                                       |
| Nominal voltage AC max.                           | 300 V  |
| Current load capacity (standard)                  | to DIN VDE 0298-4                                    |
| Current load capacity min. wire                   | 4,5 A  |
| Electrical resistance line constant wire          | 57 Ω/km @ 20 °C                                      |
| AC withstand voltage (wire - wire)                | 2 kV @ 60 s  |
| Power frequency withstand voltage (wire - jacket) | 2 kV @ 60 s  |
| Min. operating temperature (static)               | -30 °C   |
| Max. operating temperature (fixed)                | 80 °C  |
| Operating temperature min. (dynamic)              | -5 °C  |
| Operating temperature max. (dynamic)              | 80 °C  |
| Flame resistance                                  | IEC 60332-2-2   UL 1581 § 1100 FT2   UL 1581 § 1090  |
| chemical resistance                               | Good, application-related testing                    |
| Gasoline resistance                               | Good, application-related testing                    |
| Oil resistance                                    | Good, application-related testing   DIN EN 60811-404 |
| Bending radius (fixed)                            | 5 x Outer diameter                                   |
| Bending radius (dynamic)                          | 10 x Outer diameter                                  |