



Bus terminating plug M12 male B-cod.

Profibus


PROFIBUS
Terminating resistor
Male
M12, 4-pole
B-coded

Link to Product

Illustration

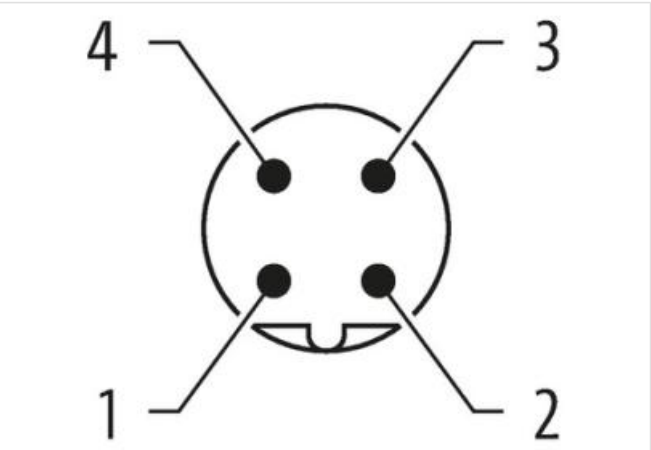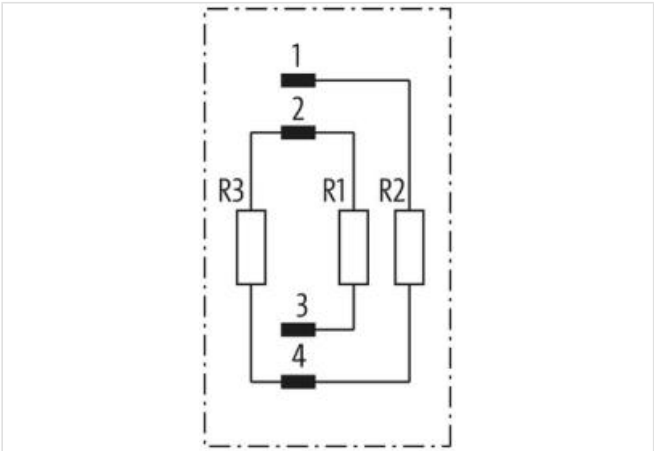

Product may differ from Image

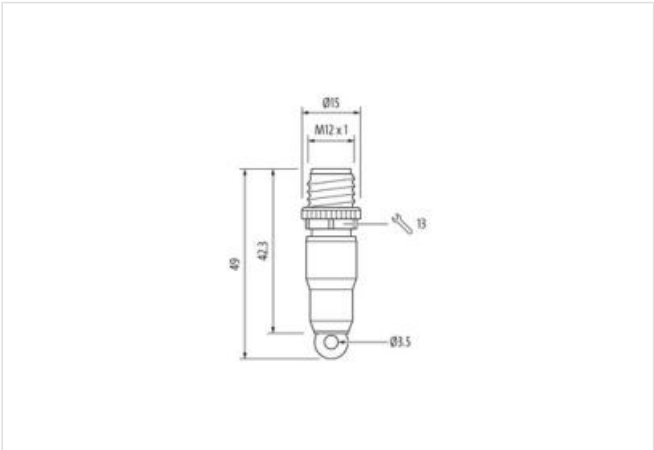

| Side 1 | |
|-------------------------------------|---------|
| Tightening torque | 0,6 Nm |
| Family construction form | M12 |
| Thread | M12 x 1 |
| Degree of protection (EN IEC 60529) | IP67 |
| Commercial data | |

| | |
|-----------------------|---------------|
| ECLASS-6.0 | 19070403 |
| ECLASS-6.1 | 27260702 |
| ECLASS-7.0 | 27440390 |
| ECLASS-8.0 | 27440190 |
| ECLASS-9.0 | 27440190 |
| ECLASS-10.1 | 27440190 |
| ECLASS-11.1 | 27440190 |
| ECLASS-12.0 | 27440190 |
| ETIM-5.0 | EC001855 |
| customs tariff number | 85331000 |
| GTIN | 4048879198592 |
| Packaging unit | 1 |

Electrical data | Supply

| | |
|---------------------------------------|------|
| Operating voltage DC max. | 30 V |
| Operating voltage DC max. (UL-listed) | 30 V |
| Current operating per contact max. | 4 A |

Installation | Pin assignment

| | |
|--------|---|
| Coding | B |
|--------|---|

Device protection | Electrical

| | |
|--|-------------------|
| Additional condition protection degree | inserted, screwed |
| Pollution Degree | 3 |
| Rated surge voltage | 0,8 kV |
| Material group (IEC 60664-1) | I |

Mechanical data | Material data

| | |
|------------------|------------------|
| Coating locking | Nickeled |
| Locking material | Zinc die-casting |

Mechanical data | Mounting data

| | |
|-----------------|---------------------------------------|
| Mounting method | inserted, screwed, Shaking protection |
|-----------------|---------------------------------------|

Environmental characteristics | Climatic

| | |
|----------------------------|--------|
| Operating temperature min. | -25 °C |
| Operating temperature max. | 85 °C |