

Adaptor M12 on rear A-cod. / MSUD valve plug C-8mm

3-pol.

Adapter

Form C (8 mm) - M12, connector at the rear

24 V AC ±20% / DC ±25%

LED and suppression

3-pole


Plastic housings with good resistance against chemicals and oils.


The resistance to aggressive media should be individually tested for your application. Further details on request.


Link to Product

Illustration







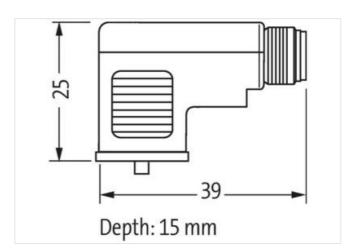

Product may differ from Image



Side 1			
Tightening torque	0,4 Nm		
Family construction form	MSUD		
Side 2			



stay connected

Tightening torque	0,6 Nm	
Family construction form	M12	
Commercial data		
ECLASS-6.0	27143423	
ECLASS-6.1	27279221	
ECLASS-7.0	27440104	
ECLASS-8.0	27440104	
ECLASS-9.0	27440106	
ECLASS-10.1	27440106	
ECLASS-11.1	27440106	
ECLASS-12.0	27440106	
ETIM-5.0	EC001855	
customs tariff number	85366990	
GTIN	4048879348713	
Packaging unit	1	
Electrical data Supply		
Operating voltage AC	24 V	
Operating voltage AC min.	19,2 V	
Operating voltage AC max.	28,8 V	
Operating voltage DC	24 V	
Operating voltage DC min.	18 V	
Operating voltage DC max.	30 V	
Cut-off peak voltage max.	55 V	
Current operating per contact max.	4 A	
Current consumption max.	15 mA	
Diagnostics		
Status indication LED	yellow	
Installation Connection		
Mounting set	M3	
Installation Pin assignment		
No. of poles	2 + PE	
Device protection Electrical		
Degree of protection (EN IEC 60529)	IP67	
Additional condition protection degree	inserted, screwed	
Rated surge voltage	0,8 kV	
Material group (IEC 60664-1)	I	
Mechanical data Material data		
Material housing	PBT	
Environmental characteristics Climatic		
Operating temperature min.	-25 °C	
Operating temperature max.	85 °C	
Important installation notes		
Note on strain relief	Protect the connectors by suitable measures from mechanical loads, e.g. by the usage of cable ties.	
	Attention: Observe the permissible bending radii when laying cables, as the IP protection class can be	
Note on bending radius	endangered by excessive bending forces.	