

RJ45 male 90° IDC

4-pol., max. 6,7mm, shielded, CAT5

PROFINET

Male 90°

RJ45, 4-pole


Field-wireable

Protection IP20

The resistance to aggressive media should be individually tested for your application. Further details on request.  
4x AWG24 / AWG22

Link to Product

Illustration

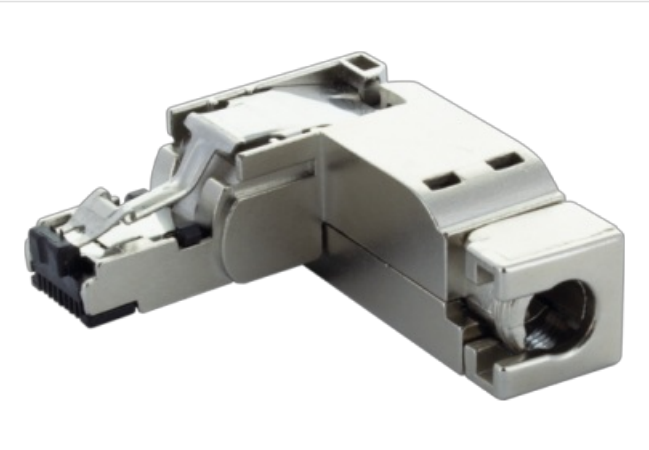

Product may differ from Image



Side 1	
Family construction form	RJ45
No. of poles	4
Commercial data	
ECLASS-6.0	27279221
ECLASS-6.1	27260703
ECLASS-7.0	2744010
ECLASS-8.0	2744010
ECLASS-9.0	27440114
ECLASS-10.1	2744010
ECLASS-11.1	2744010
ECLASS-12.0	27440114
ETIM-5.0	EC001855
customs tariff number	85366990
GTIN	4048879830379
Packaging unit	1
Industrial communication	
Data transmission rate max.	100 MBit/s

**Device protection | Electrical**

Degree of protection (EN IEC 60529)	IP20
Pollution Degree	2

**Mechanical data | Mounting data**

Height	16,2 mm
Width	40,5 mm
Depth	43,5 mm

**Environmental characteristics | Climatic**

Operating temperature min.	-30 °C
Operating temperature max.	70 °C

**Important installation notes**

Note on strain relief	Protect the connectors by suitable measures from mechanical loads, e.g. by the usage of cable ties.
Note on bending radius	<b>Attention:</b> Observe the permissible bending radii when laying cables, as the IP protection class can be endangered by excessive bending forces.