

M8 panel feed through male / female 0° A-cod.

3-pol., shielded

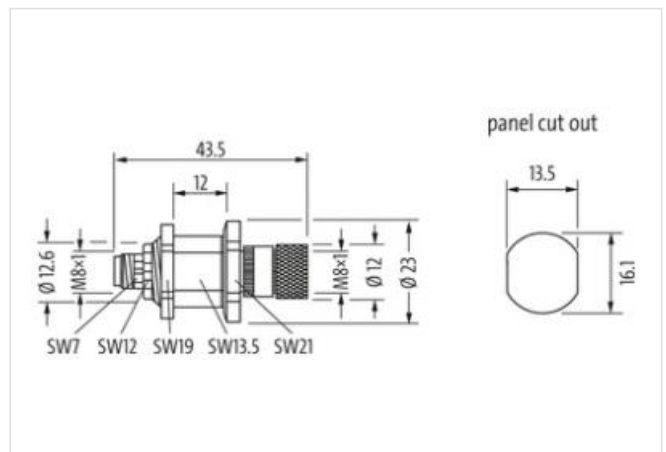
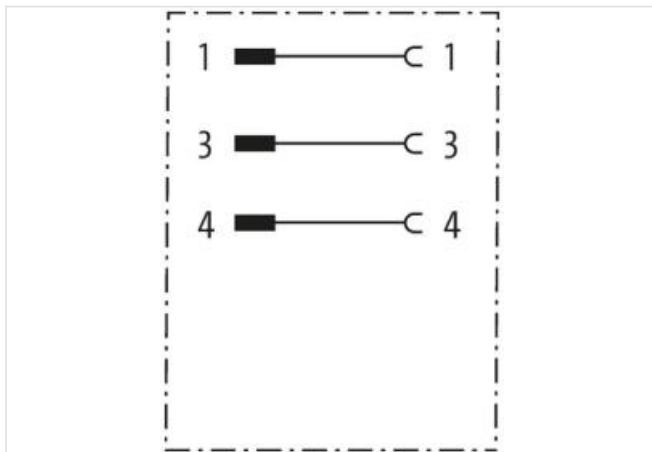
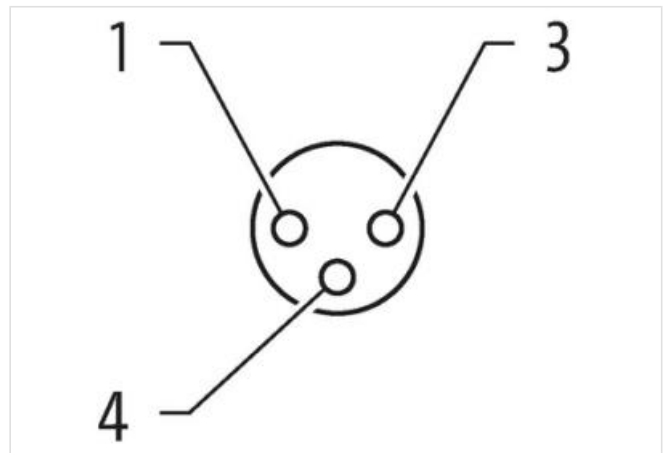
Control cabinet entry system

Male - female

M8, 3-pole

Rear mounting

shielded

[Link to Product](#)**Illustration**



Product may differ from Image

| Side 1 | |
|--|-------------------|
| Family construction form | M8 |
| Material contact | Copper alloy |
| No. of poles | 4 |
| Commercial data | |
| ECLASS-6.0 | 27143423 |
| ECLASS-7.0 | 27449001 |
| ECLASS-8.0 | 27449001 |
| ECLASS-9.0 | 27440321 |
| ECLASS-10.1 | 27440109 |
| ECLASS-11.1 | 27440109 |
| ECLASS-12.0 | 27440109 |
| ETIM-5.0 | EC002640 |
| customs tariff number | 85366990 |
| GTIN | 4048879689298 |
| Packaging unit | 1 |
| Electrical data Supply | |
| Operating voltage DC | 30 V |
| Current operating per contact max. | 4 A |
| Diagnostics | |
| Status indication LED | no |
| Installation Connection | |
| Mating cycles min. | 100 |
| Device protection Electrical | |
| Degree of protection (EN IEC 60529) | IP67 |
| Additional condition protection degree | inserted, screwed |
| Pollution Degree | 3 |
| Rated surge voltage | 2,5 kV |
| Overvoltage category (EN 60950-1) | II |
| Mechanical data | |
| Contour for corrugated hose | without |
| Mechanical data Material data | |
| Coating contact | gold plated |
| Material housing | Metal |
| Material contact carrier | PA |

Mounting method inserted, screwed

| | |
|----------------------------|--------|
| Operating temperature min. | -25 °C |
| Operating temperature max. | 85 °C |

| | |
|------------------------|---|
| Note on strain relief | Protect the connectors by suitable measures from mechanical loads, e.g. by the usage of cable ties. |
| Note on bending radius | Attention: Observe the permissible bending radii when laying cables, as the IP protection class can be endangered by excessive bending forces. |