
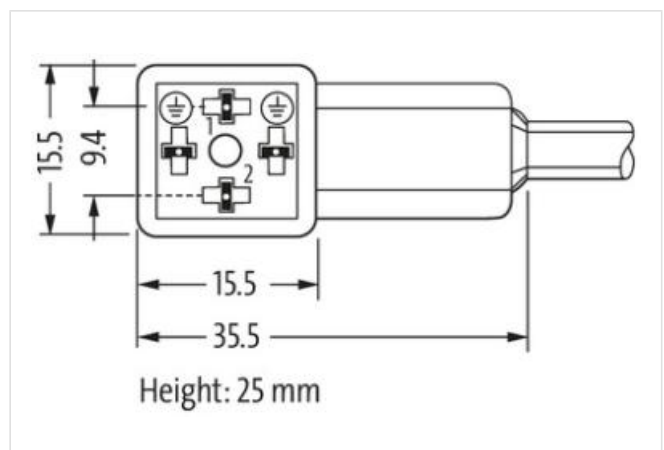
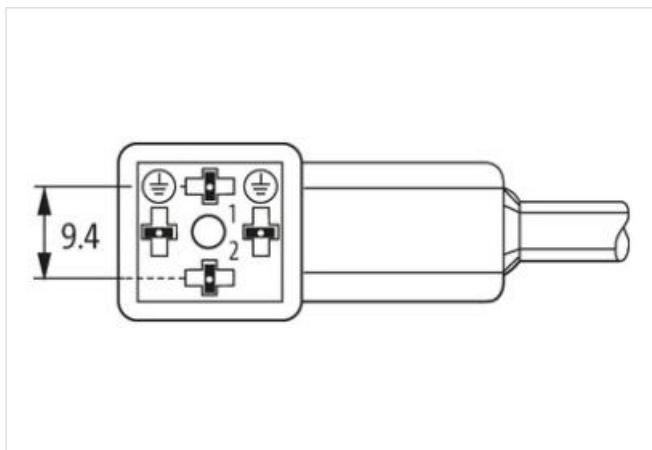
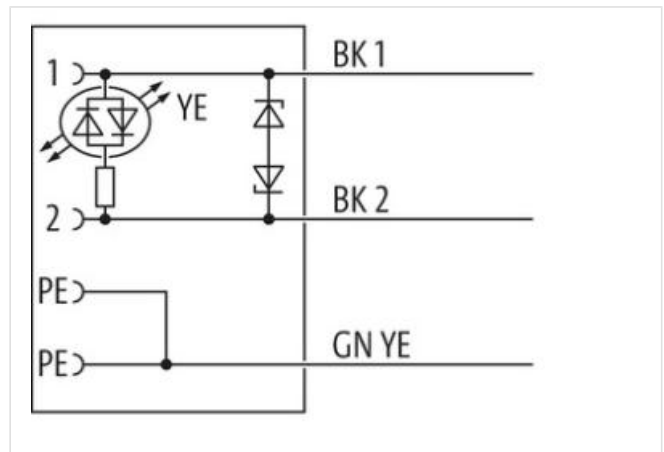


PUR 3x0.75 ye UL/CSA 3m

The resistance to aggressive media should be individually tested for your application. Further details on request.

### Illustration

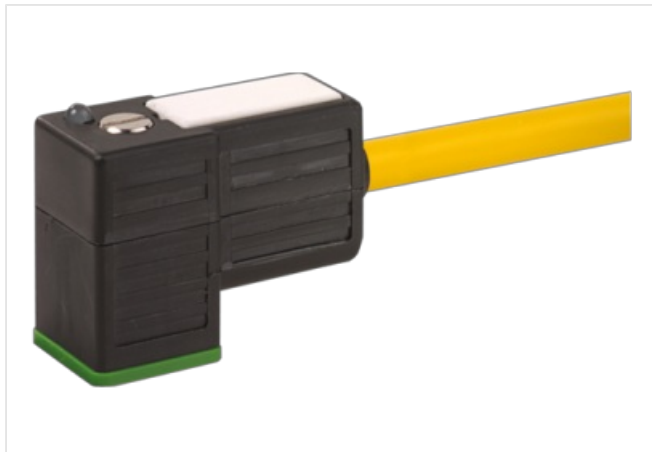

|              |     |
|--------------|-----|
| Cable length | 3 m |
|--------------|-----|

Tightening torque 0,4 Nm

Thread M3

| Commercial data       |               |
|-----------------------|---------------|
| ECLASS-6.0            | 27279218      |
| ECLASS-7.0            | 27279218      |
| ECLASS-8.0            | 27279218      |
| ECLASS-9.0            | 27060311      |
| ECLASS-10.1           | 27060312      |
| ECLASS-11.1           | 27060312      |
| ECLASS-12.0           | 27060312      |
| ETIM-5.0              | EC001855      |
| customs tariff number | 85444290      |
| GTIN                  | 4048879115506 |
| Packaging unit        | 1             |

| Electrical data |       |
|-----------------|-------|
| Capacity CX     | 20 ms |

| Electrical data   Supply           |        |
|------------------------------------|--------|
| Operating voltage AC               | 24 V   |
| Operating voltage AC min.          | 19,2 V |
| Operating voltage AC max.          | 28,8 V |
| Operating voltage DC               | 24 V   |
| Operating voltage DC min.          | 18 V   |
| Operating voltage DC max.          | 30 V   |
| Cut-off peak voltage max.          | 55 V   |
| Current operating per contact max. | 4 A    |

| Device protection   Electrical         |                   |
|----------------------------------------|-------------------|
| Degree of protection (EN IEC 60529)    | IP67              |
| Additional condition protection degree | inserted, screwed |
| Rated surge voltage                    | 0,8 kV            |

| Mechanical data   Material data |         |
|---------------------------------|---------|
| Color housing                   | black   |
| Material housing                | Plastic |

| Mechanical data   Mounting data |                   |
|---------------------------------|-------------------|
| Mounting method                 | inserted, screwed |

| Environmental characteristics   Climatic |                            |
|------------------------------------------|----------------------------|
| Operating temperature min.               | -25 °C                     |
| Operating temperature max.               | 85 °C                      |
| Additional condition temperature range   | depending on cable quality |

| Important installation notes |                                                                                                                                                       |
|------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------|
| Note on strain relief        | Protect the connectors by suitable measures from mechanical loads, e.g. by the usage of cable ties.                                                   |
| Note on bending radius       | <b>Attention:</b> Observe the permissible bending radii when laying cables, as the IP protection class can be endangered by excessive bending forces. |

| Installation   Cable              |                                |
|-----------------------------------|--------------------------------|
| Cable identification              | 026                            |
| Cable Type                        | 2                              |
| Printing color of wire insulation | white (isolation black)        |
| Jacket Color                      | yellow                         |
| Type of Certificate               | cURus                          |
| Amount stranding                  | 1                              |
| Stranding                         | 3 wires twisted                |
| wire arrangement                  | black 1, black 2, green-yellow |
| Cable weight                      | 55 g/m                         |

|                                          |                                                  |
|------------------------------------------|--------------------------------------------------|
| Material jacket                          | PUR                                              |
| Shore hardness jacket                    | 85 ± 5 Shore A                                   |
| Freedom from ingredients (jacket)        | lead-free, cadmium-free, CFC-free, silicone-free |
| Outer-diameter (jacket)                  | 5,9 mm                                           |
| Tolerance outer diameter (sheath)        | ± 5 %                                            |
| Material inner jacket                    | PVC                                              |
| Color (inner jacket)                     | yellow                                           |
| Material wire insulation                 | PVC                                              |
| Amount wires                             | 3                                                |
| Outer diameter insulation                | 1,8 mm                                           |
| Outer diameter tolerance core insulation | ± 5 %                                            |
| Shore hardness wire insulation           | 43 ± 5 Shore D                                   |
| Ingredient freeness wire insulation      | lead-free, cadmium-free, CFC-free, silicone-free |
| Printing color of wire insulation        | white (isolation black)                          |
| Amount strands (wire)                    | 42                                               |
| Diameter of single wires                 | 0,15 mm                                          |
| Conductor crosssection (wire)            | 0,75 mm <sup>2</sup>                             |
| Material conductor wire                  | Stranded copper wire, bare                       |
| Conductor type (wire)                    | strand class 6                                   |
| Traversing distance (C-track)            | 5 m @ 25 °C   horizontal                         |
| Nominal voltage AC max.                  | 300 V                                            |
| Current load capacity (standard)         | to DIN VDE 0298-4                                |
| Current load capacity min. wire          | 9,6 A                                            |
| Electrical resistance line constant wire | 26 Ω/km @ 20 °C                                  |
| Min. operating temperature (static)      | -30 °C                                           |
| Max. operating temperature (fixed)       | 80 °C                                            |
| Operating temperature min. (dynamic)     | -5 °C                                            |
| Operating temperature max. (dynamic)     | 80 °C                                            |
| chemical resistance                      | Good, application-related testing                |
| Gasoline resistance                      | Good, application-related testing                |
| Oil resistance                           | DIN EN 60811-404                                 |
| Bending radius (fixed)                   | 10 x Outer diameter                              |
| Bending radius (dynamic)                 | 15 x Outer diameter                              |
| Travel speed (C-track)                   | 2 Mio. @ 25 °C                                   |