

A3 Bulkhead mounted h., IP67

Single locking lever m.


A3  
Bulkhead mounted housing  
Single locking lever  
IP67  
Technical data will be only guaranteed with Murrelektronik components.

Link to Product

Illustration



Product may differ from Image

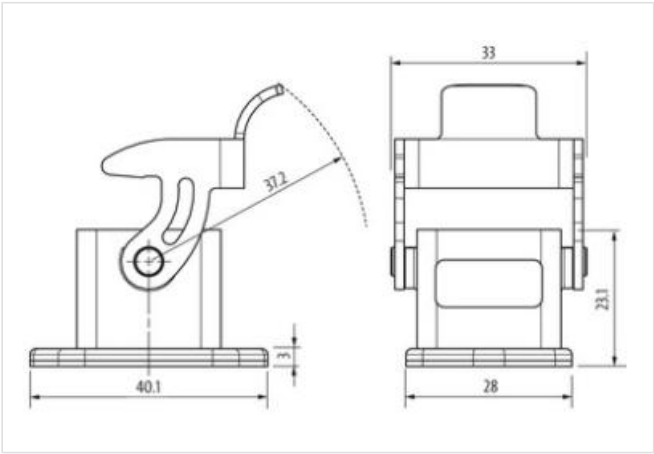

Commercial data

|                       |               |
|-----------------------|---------------|
| ECLASS-6.0            | 27143424      |
| ECLASS-6.1            | 27261203      |
| ECLASS-7.0            | 27440202      |
| ECLASS-8.0            | 27440202      |
| ECLASS-9.0            | 27440202      |
| ECLASS-10.1           | 27440202      |
| ECLASS-11.1           | 27440202      |
| ECLASS-12.0           | 27440202      |
| ETIM-5.0              | EC000437      |
| customs tariff number | 85389099      |
| GTIN                  | 4048879643016 |
| Packaging unit        | 1             |

Installation | Connection

|                    |     |
|--------------------|-----|
| Mating cycles min. | 500 |
|--------------------|-----|

Device protection | Electrical

|                                        |                  |
|----------------------------------------|------------------|
| Degree of protection (EN IEC 60529)    | IP67             |
| Additional condition protection degree | inserted, locked |

Mechanical data

|              |                          |
|--------------|--------------------------|
| Housing type | Bulkhead mounted housing |
|--------------|--------------------------|

Mechanical data | Material data

|                 |               |
|-----------------|---------------|
| Coating housing | powder-coated |
| Coating locking | verzinkt      |
| Material gasket | NBR           |

|                  |                  |
|------------------|------------------|
| Material housing | Zinc die-casting |
|------------------|------------------|

|                  |       |
|------------------|-------|
| Locking material | Steel |
|------------------|-------|

**Mechanical data | Mounting data**

|      |    |
|------|----|
| Size | A3 |
|------|----|

|        |         |
|--------|---------|
| Height | 23,1 mm |
|--------|---------|

|       |         |
|-------|---------|
| Width | 40,1 mm |
|-------|---------|

|       |       |
|-------|-------|
| Depth | 33 mm |
|-------|-------|

|                    |                      |
|--------------------|----------------------|
| Looking techniques | Single locking lever |
|--------------------|----------------------|

**Environmental characteristics | Climatic**

|                            |        |
|----------------------------|--------|
| Operating temperature min. | -40 °C |
|----------------------------|--------|

|                            |        |
|----------------------------|--------|
| Operating temperature max. | 100 °C |
|----------------------------|--------|

|                                    |           |
|------------------------------------|-----------|
| Climatic category (EN IEC 60068-1) | 40/100/21 |
|------------------------------------|-----------|