


Double locking lever, top entry M25

**Link to Product**

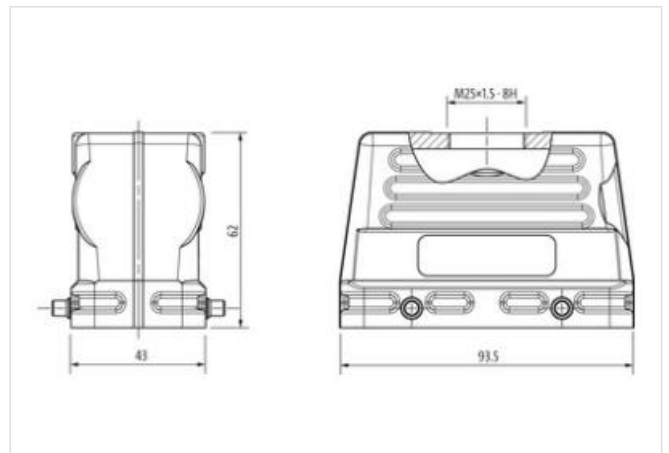

## Commercial data

## Installation

## Installation | Connection

Device protection | Electrical

### Mechanical data

Mechanical data | Material data

The information in this Product-PDF has been compiled with the utmost care.  
Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 2024-05-19

Murrelektronik ApS | Alexander Foss Gade 13. 1. | 9000 Aalborg | Fon +45 96 35 06 06 | Fax | shop@murrelektronik.dk | shop.murrelektronik.dk

|                 |               |
|-----------------|---------------|
| Coating housing | powder-coated |
|-----------------|---------------|

|                 |          |
|-----------------|----------|
| Coating locking | verzinkt |
|-----------------|----------|

|                  |                      |
|------------------|----------------------|
| Material housing | Aluminum die casting |
|------------------|----------------------|

|                  |       |
|------------------|-------|
| Locking material | Steel |
|------------------|-------|

**Mechanical data | Mounting data**

|      |     |
|------|-----|
| Size | B16 |
|------|-----|

|        |       |
|--------|-------|
| Height | 62 mm |
|--------|-------|

|       |       |
|-------|-------|
| Width | 43 mm |
|-------|-------|

|       |         |
|-------|---------|
| Depth | 93,5 mm |
|-------|---------|

|                    |                      |
|--------------------|----------------------|
| Locking techniques | Double locking lever |
|--------------------|----------------------|

**Environmental characteristics | Climatic**

|                            |        |
|----------------------------|--------|
| Operating temperature min. | -40 °C |
|----------------------------|--------|

|                            |        |
|----------------------------|--------|
| Operating temperature max. | 100 °C |
|----------------------------|--------|

|                                    |           |
|------------------------------------|-----------|
| Climatic category (EN IEC 60068-1) | 40/100/21 |
|------------------------------------|-----------|