


## Double locking lever, top entry M40

B24  
Hood (high)  
Double locking lever  
IP65

Technical data will be only guaranteed with Murrelektronik components.

### Illustration

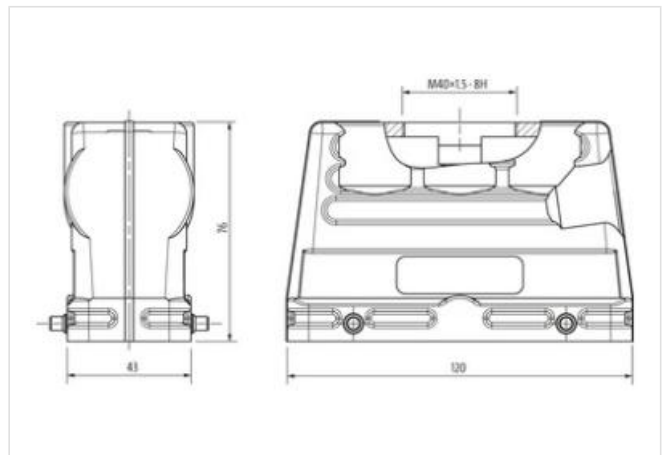

Product may differ from Image

|                       |               |
|-----------------------|---------------|
| ECLASS-6.0            | 27143424      |
| ECLASS-6.1            | 27261203      |
| ECLASS-7.0            | 27440202      |
| ECLASS-8.0            | 27440202      |
| ECLASS-9.0            | 27440202      |
| ECLASS-10.1           | 27440202      |
| ECLASS-11.1           | 27440202      |
| ECLASS-12.0           | 27440202      |
| ETIM-5.0              | EC000437      |
| customs tariff number | 85389099      |
| GTIN                  | 4048879647069 |
| Packaging unit        | 1             |

|              |          |
|--------------|----------|
| Cable outlet | straight |
|--------------|----------|

|              |          |
|--------------|----------|
| Cable outlet | straight |
|--------------|----------|

|                    |     |
|--------------------|-----|
| Mounting set       | M40 |
| Mating cycles min. | 500 |

|              |     |
|--------------|-----|
| Mounting set | M40 |
|--------------|-----|

|                    |     |
|--------------------|-----|
| Mating cycles min. | 500 |
|--------------------|-----|

|                                        |                                         |
|----------------------------------------|-----------------------------------------|
| Degree of protection (EN IEC 60529)    | IP65                                    |
| Additional condition protection degree | inserted, locked, with screw connection |

|                                     |      |
|-------------------------------------|------|
| Degree of protection (EN IEC 60529) | IP65 |
|-------------------------------------|------|

|                                        |                                         |
|----------------------------------------|-----------------------------------------|
| Additional condition protection degree | inserted, locked, with screw connection |
|----------------------------------------|-----------------------------------------|

| Housing type    | Hood |
|-----------------|------|
| Public housing  | 100% |
| Private housing | 100% |
| Homeless        | 100% |
| Other           | 100% |

| Housing type | Hood |
|--------------|------|
|--------------|------|

The information in this Product-PDF has been compiled with the utmost care.  
Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 2024-05-21

Murrelektronik ApS | Alexander Foss Gade 13. 1. | 9000 Aalborg | Fon +45 96 35 06 06 | Fax | shop@murrelektronik.dk | shop.murrelektronik.dk

|                 |               |
|-----------------|---------------|
| Coating housing | powder-coated |
|-----------------|---------------|

|                 |          |
|-----------------|----------|
| Coating locking | verzinkt |
|-----------------|----------|

|                  |                      |
|------------------|----------------------|
| Material housing | Aluminum die casting |
|------------------|----------------------|

|                  |       |
|------------------|-------|
| Locking material | Steel |
|------------------|-------|

**Mechanical data | Mounting data**

|      |     |
|------|-----|
| Size | B24 |
|------|-----|

|        |       |
|--------|-------|
| Height | 76 mm |
|--------|-------|

|       |       |
|-------|-------|
| Width | 43 mm |
|-------|-------|

|       |        |
|-------|--------|
| Depth | 120 mm |
|-------|--------|

|                    |                      |
|--------------------|----------------------|
| Locking techniques | Double locking lever |
|--------------------|----------------------|

**Environmental characteristics | Climatic**

|                            |        |
|----------------------------|--------|
| Operating temperature min. | -40 °C |
|----------------------------|--------|

|                            |        |
|----------------------------|--------|
| Operating temperature max. | 100 °C |
|----------------------------|--------|

|                                    |           |
|------------------------------------|-----------|
| Climatic category (EN IEC 60068-1) | 40/100/21 |
|------------------------------------|-----------|