

**PE-Female module, 1-pole, axial screw t.**

1000 V, 200 A

Female

PE

Axial screw connection

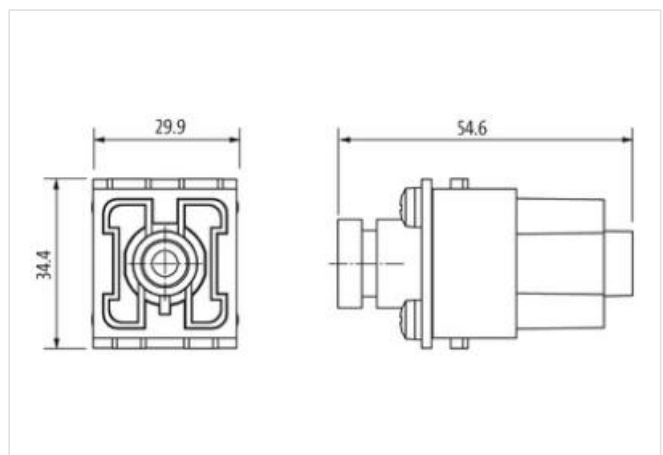
Technical data will be only guaranteed with Murrelektronik components.

Axial screw connection only for flexible wires

The clip 70MH-ZZ100-0000000 is needed (4×)

**Link to Product****Illustration**

Product may differ from Image

**Commercial data**

ECLASS-6.0	27143424
ECLASS-7.0	27440209
ECLASS-8.0	27440209
ETIM-5.0	EC000438
customs tariff number	85366990
GTIN	4048879663915
Packaging unit	1

**Electrical data | Supply**

Operating current	200 A
-------------------	-------

**Installation**

Connection cross section min.	25 mm <sup>2</sup>
Connection cross section max.	70 mm <sup>2</sup>
AWG number min.	3
AWG number max.	0

**Installation | Connection**

Stripping length	16 mm
Wire insulation diameter variable max.	max. 12 mm (25 mm <sup>2</sup> ); 16 mm (40 mm <sup>2</sup> )
Connection information	Axial screw connection
Tightening torque	(25...70 mm <sup>2</sup> ); 9 Nm (70 mm <sup>2</sup> )
Tightening torque	8 Nm
Gender	female
Width across flats	SW5
Mating cycles min.	500

The information in this Product-PDF has been compiled with the utmost care.

Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 2024-05-21

Murrelektronik ApS | Alexander Foss Gade 13, 1. | 9000 Aalborg | Fon +45 96 35 06 06 | Fax | shop@murrelektronik.dk | shop.murrelektronik.dk

**Installation | Pin assignment**

No. of poles	PE
--------------	----

**Device protection | Electrical**

Pollution Degree	3
------------------	---

**Mechanical data | Material data**

Coating contact	silver-plated
-----------------	---------------

Combustibility class (UL94)	V-0
-----------------------------	-----

Material housing	PC
------------------	----

Material contact	Brass
------------------	-------

**Mechanical data | Mounting data**

Number of module slots	2
------------------------	---

Height	61,1 mm
--------	---------

Width	34,3 mm
-------	---------

Depth	29,3 mm
-------	---------

**Environmental characteristics | Climatic**

Operating temperature min.	-40 °C
----------------------------	--------

Operating temperature max.	125 °C
----------------------------	--------