

Mini (7/8) 3 pole Tee, Male (Ext.)/2x Female


Yellow Housing


T-coupler 7/8" – 7/8", female/male 3-pole Parallel circuit

Link to Product

Illustration





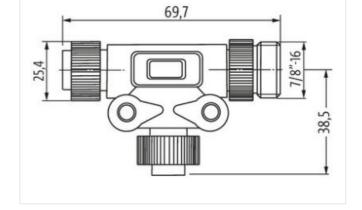

Product may differ from Image



Commercial data		
ECLASS-10.1	27440106	
ECLASS-11.1	27440106	
ECLASS-12.0	27440106	
customs tariff number	85366990	
GTIN	4065909016022	
Packaging unit	1	
Electrical data Supply		

The information in this Product-PDF has been compiled with the utmost care. Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 2024-04-25

Murrelektronik ApS | Alexander Foss Gade 13, 1. | 9000 Aalborg | Fon +45 96 35 06 06 | Fax | shop@murrelektronik.dk | shop.murrelektronik.dk



Operating voltage AC max.	600 V
Operating voltage DC max.	600 V
Current operating per contact max.	13 A
Installation Connection	
Mounting set	7/8"
Device protection Electrical	
Degree of protection (EN IEC 60529)	IP67
Additional condition protection degree	inserted, screwed
Pollution Degree	3
Mechanical data	
Contour for corrugated hose	without
Mechanical data Material data	
Coating locking	eloxiert
Material housing	PVC
Locking material	Aluminium
Mechanical data Mounting data	
Mounting method	Schraubgewinde
Environmental characteristics Climatic	
Operating temperature min.	-20 °C
Operating temperature max.	105 °C

The information in this Product-PDF has been compiled with the utmost care. Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 2024-04-25

Murrelektronik ApS | Alexander Foss Gade 13, 1. | 9000 Aalborg | Fon +45 96 35 06 06 | Fax | shop@murrelektronik.dk | shop.murrelektronik.dk