


Mini (7/8) 5 pole Tee, Male (Ext.)/2x Female


Yellow Housing


5-pole T-coupler 7/8" – 7/8", female/male Parallel circuit

Link to Product

Illustration

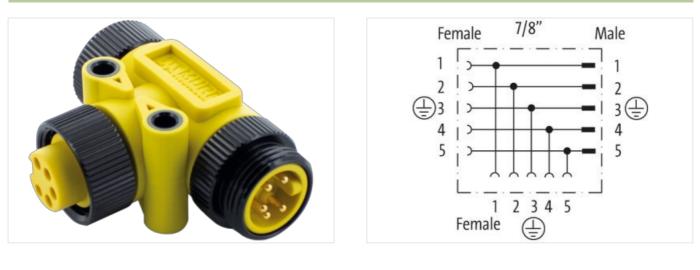



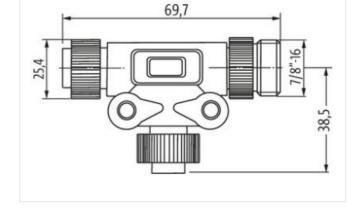

Product may differ from Image



Commercial data		
ECLASS-10.1	27440106	
ECLASS-11.1	27440106	
ECLASS-12.0	27440106	
customs tariff number	85366990	
GTIN	4065909016145	
Packaging unit	1	
Electrical data Supply		

The information in this Product-PDF has been compiled with the utmost care. Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 2024-04-25

Murrelektronik ApS | Alexander Foss Gade 13, 1. | 9000 Aalborg | Fon +45 96 35 06 06 | Fax | shop@murrelektronik.dk | shop.murrelektronik.dk



Operating voltage AC max.	600 V	
Operating voltage DC max.	600 V	
Current operating per contact max.	8 A	
Installation Connection		
Mounting set	7/8"	
Device protection Electrical		
Degree of protection (EN IEC 60529)	IP67	
Additional condition protection degree	inserted, screwed	
Pollution Degree	3	
Mechanical data		
Contour for corrugated hose	without	
Mechanical data Material data		
Coating locking	eloxiert	
Material housing	PVC	
Locking material	Aluminium	
Mechanical data Mounting data		
Mounting method	Schraubgewinde	
Environmental characteristics Climatic		
Operating temperature min.	-20 °C	
Operating temperature max.	105 °C	

The information in this Product-PDF has been compiled with the utmost care. Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 2024-04-25

Murrelektronik ApS | Alexander Foss Gade 13, 1. | 9000 Aalborg | Fon +45 96 35 06 06 | Fax | shop@murrelektronik.dk | shop.murrelektronik.dk