

CAP BIG WITH PLUG. SPRING TERM. 21-POLE

For use with 4-,6-,8-way d-box M12 5-pole

Cap for 4-, 6-, and 8-way distribution box, 5-pole

Spring clamp plug-in terminals


Plastic housings with good resistance against chemicals and oils.


The resistance to aggressive media should be individually tested for your application. Further details on request.

Link to Product

Illustration



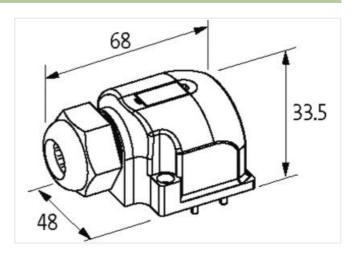



Product may differ from Image



| Commercial data | | |
|-----------------|----------|--|
| ECLASS-6.0 | 27143423 | |
| ECLASS-6.1 | 27279219 | |
| ECLASS-7.0 | 27279219 | |
| ECLASS-8.0 | 27279219 | |
| ECLASS-9.0 | 27440108 | |
| ECLASS-10.1 | 27440111 | |



| ECLASS-11.1 | 27440111 |
|--|---------------------------|
| ECLASS-12.0 | 27440111 |
| ETIM-5.0 | EC002585 |
| customs tariff number | 85369010 |
| GTIN | 4048879300032 |
| Packaging unit | 1 |
| Electrical data Supply | |
| Total current max. | 8 A |
| Installation | |
| Connection cross section max. | 1,5 mm² |
| AWG number max. | 16 |
| Installation Connection | |
| Connection | Spring clamp terminals FK |
| Device protection Media | |
| Flame resistance | flame retardant |
| Mechanical data Material data | |
| Material housing | Plastic |
| Environmental characteristics Climatic | |
| Operating temperature min. | -20 °C |
| Operating temperature max. | 80 °C |
| Connection type 1 | |
| Family construction form | Сар |
| No. of poles | 21 |