

MOTOR SUPPRESSOR

RC, 3x575VAC/5,5kW



3× 575 V AC

RC

Suppressors for other voltages, frequencies, and motor ratings available on request. Do not use RC motor suppressors with frequency inverters.

[Link til artikel](#)

Billede

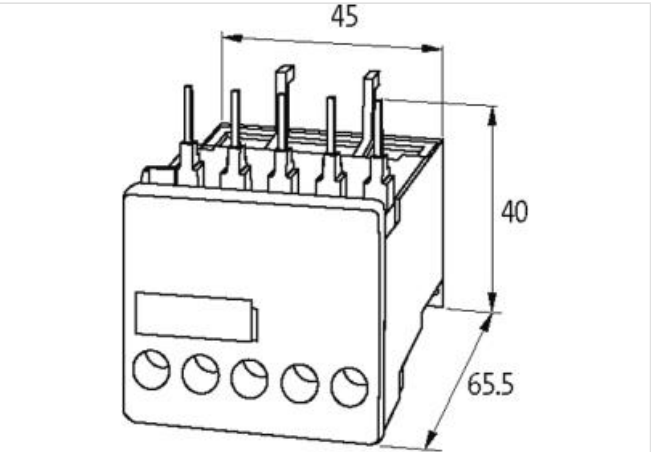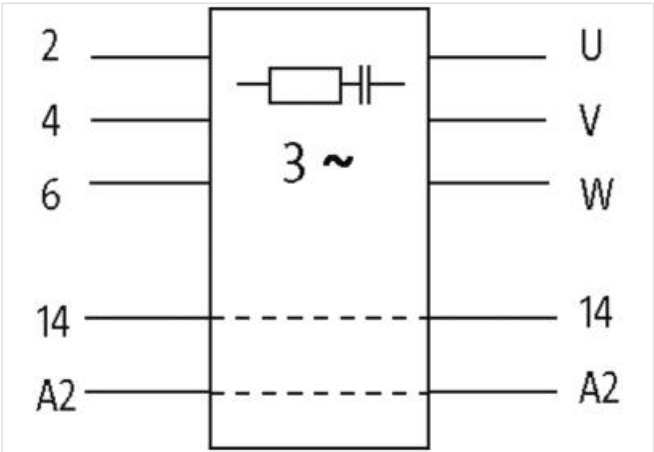

Produktet kan afvige fra billedet



| Commercial data |          |
|-----------------|----------|
| ECLASS-6.0      | 27371013 |
| ECLASS-6.1      | 27371013 |
| ECLASS-7.0      | 27371013 |
| ECLASS-8.0      | 27371013 |
| ECLASS-9.0      | 27371013 |
| ECLASS-10.1     | 27371013 |

|                                                 |                                               |
|-------------------------------------------------|-----------------------------------------------|
| ECLASS-11.1                                     | 27371013                                      |
| ECLASS-12.0                                     | 27371013                                      |
| ETIM-5.0                                        | EC000197                                      |
| customs tariff number                           | 85363010                                      |
| GTIN                                            | 4048879018869                                 |
| Pakke-enhed                                     | 1                                             |
| <b>Compatibility   Compatible with</b>          |                                               |
| Appropriate contactors                          | 3 RT 20, Siemens 3 RT 10                      |
| <b>Electrical data   Supply</b>                 |                                               |
| Power frequency                                 | 50 ... 60 Hz                                  |
| <b>Electrical data   Input</b>                  |                                               |
| Input voltage AC                                | 575 V                                         |
| <b>Installation   Connection</b>                |                                               |
| Connection information                          | fits directly into SIRIUS contactors, size 00 |
| <b>Device protection   Media</b>                |                                               |
| Flame resistance                                | flame retardant                               |
| <b>Mechanical data   Material data</b>          |                                               |
| Combustibility class housing (UL94)             | V-0                                           |
| Material housing                                | Plastic                                       |
| <b>Mechanical data   Mounting data</b>          |                                               |
| Height                                          | 40 mm                                         |
| Width                                           | 45 mm                                         |
| Depth                                           | 65,5 mm                                       |
| <b>Environmental characteristics   Climatic</b> |                                               |
| Operating temperature min.                      | -20 °C                                        |
| Operating temperature max.                      | 60 °C                                         |