



**RMME 11/230 AC INPUT RELAY**

IN: 230 VAC/DC - OUT: 125 VAC/DC / 1 A

1 relay; 1 NO contact  
1 A  
230 V AC  
Screw terminals

[Link til artikel](#)

Billede

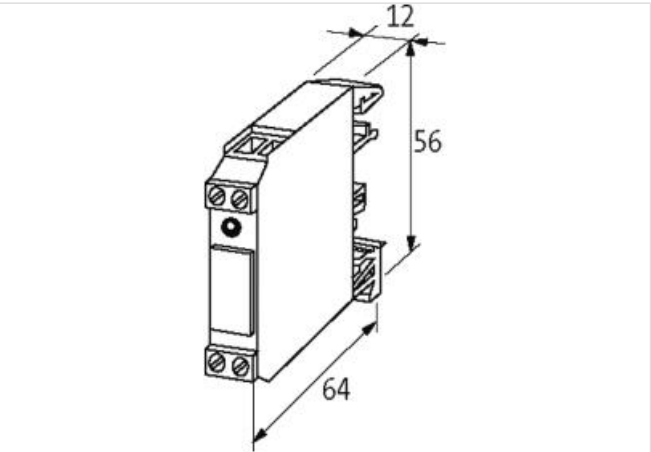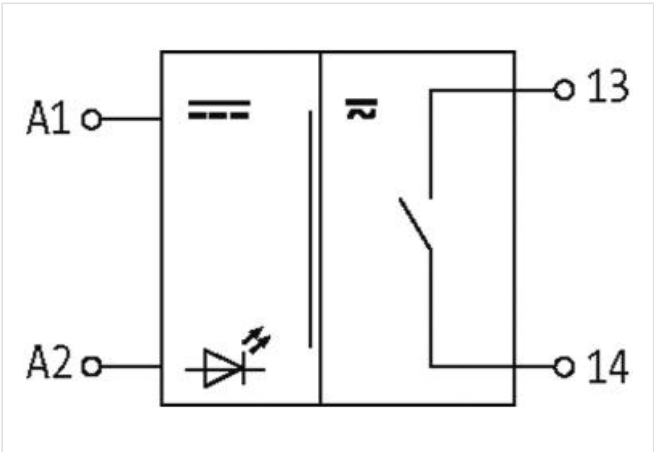

Produktet kan afvige fra billedet



| Commercial data |          |
|-----------------|----------|
| ECLASS-6.0      | 27371001 |
| ECLASS-6.1      | 27371601 |
| ECLASS-7.0      | 27371601 |
| ECLASS-8.0      | 27371601 |
| ECLASS-9.0      | 27371601 |
| ECLASS-10.1     | 27371601 |

|                                                 |                                     |
|-------------------------------------------------|-------------------------------------|
| ECLASS-11.1                                     | 27371601                            |
| ECLASS-12.0                                     | 27371601                            |
| ETIM-5.0                                        | EC001437                            |
| customs tariff number                           | 85364900                            |
| GTIN                                            | 4048879027540                       |
| Pakke-enhed                                     | 1                                   |
| <b>Electrical data   Input</b>                  |                                     |
| Input voltage AC                                | 230 V                               |
| Input voltage AC min.                           | 195 V                               |
| Input voltage AC max.                           | 253 V                               |
| Input voltage DC                                | 230 V                               |
| Input voltage DC min.                           | 195 V                               |
| Input voltage DC max.                           | 253 V                               |
| Input current                                   | 6 mA                                |
| <b>Electrical data   Output</b>                 |                                     |
| Utilization category AC-15 (EN IEC 60947-5-1)   | 0,25 A @ 50 V                       |
| Switching frequency max.                        | 15 Hz                               |
| Power rating AC max.                            | 60 VA                               |
| Power rating DC max.                            | 30 W                                |
| Switching voltage AC max.                       | 125 V                               |
| Switching voltage DC max.                       | 125 V                               |
| Switching current DC                            | 1 mA                                |
| Switching current max.                          | 1 A                                 |
| Switching capacity AC-12 (EN IEC 60947-5-1)     | 0.5 A (50 V AC)                     |
| <b>Diagnostics</b>                              |                                     |
| Status indication LED                           | yellow                              |
| <b>Device protection</b>                        |                                     |
| Condition lifetime                              | load-dependent                      |
| <b>Device protection   Electrical</b>           |                                     |
| Rated surge voltage                             | 1,5 kV                              |
| Electrical lifetime                             | 100000000 Cycles                    |
| <b>Device protection   Mechanical</b>           |                                     |
| Mechanical endurance                            | 100000000 Cycles                    |
| <b>Mechanical data</b>                          |                                     |
| Drop-out time max.                              | 10 ms                               |
| Response time max.                              | 10 ms                               |
| Bounce time max.                                | 1 ms                                |
| <b>Mechanical data   Material data</b>          |                                     |
| Material contact                                | Pd Ni-Au Rh                         |
| <b>Mechanical data   Mounting data</b>          |                                     |
| Mounting method                                 | geschnappt                          |
| Suitable for mounting type                      | Mounting rail TH35, G32, (EN 60715) |
| Height                                          | 56 mm                               |
| Width                                           | 12 mm                               |
| Depth                                           | 64 mm                               |
| <b>Environmental characteristics   Climatic</b> |                                     |
| Operating temperature min.                      | -20 °C                              |
| Operating temperature max.                      | 60 °C                               |
| <b>Connection type 2</b>                        |                                     |
| Connection type 1                               | X1                                  |

|                          |                    |
|--------------------------|--------------------|
| Connection type 2        | X2                 |
| Connection               | Screw terminals SK |
| Family construction form | terminal           |
| Gender                   | female             |
| Color contact carrier    | green              |
| No. of poles             | 2                  |
| PIN 1                    | A 1                |
| PIN 2                    | A 2                |
| Connection               | Screw terminals SK |
| Family construction form | terminal           |
| Gender                   | female             |
| Color contact carrier    | green              |
| No. of poles             | 2                  |
| PIN 1                    | 13                 |
| PIN 2                    | 14                 |