



MASI20 INSTALLATION TECHNOLOGY

Distributor AS-I and extern power, 1 potential

- 5 ports, universal
- 1 potential
- 5 plug terminals included

[Link til artikel](#)

Billede

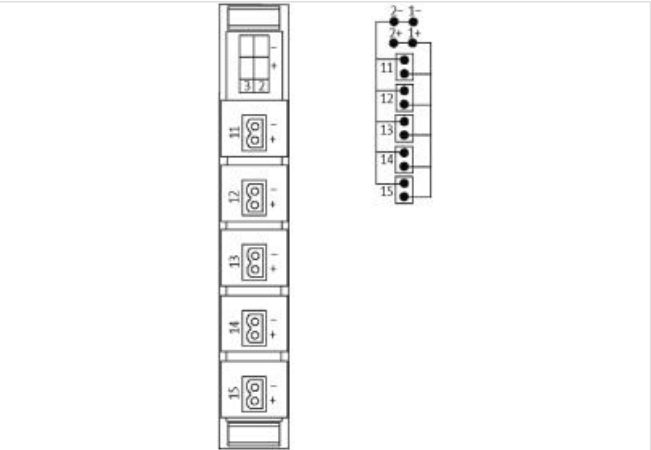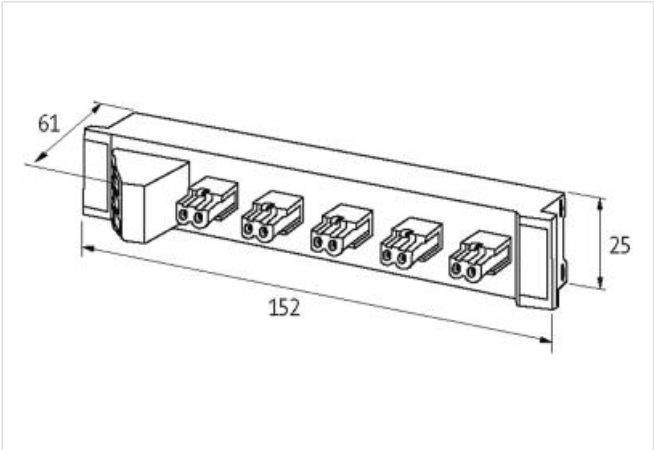

Produktet kan afvige fra billedet



| Commercial data |          |
|-----------------|----------|
| ECLASS-6.0      | 27279219 |
| ECLASS-6.1      | 27279219 |
| ECLASS-7.0      | 27279219 |
| ECLASS-8.0      | 27279219 |
| ECLASS-9.0      | 27440108 |
| ECLASS-10.1     | 27440111 |

|                       |               |
|-----------------------|---------------|
| ECLASS-11.1           | 27440111      |
| ECLASS-12.0           | 27440111      |
| ETIM-5.0              | EC001596      |
| customs tariff number | 85369010      |
| GTIN                  | 4048879050463 |
| Pakke-enhed           | 1             |

**Electrical data | Supply**

|                                 |      |
|---------------------------------|------|
| Operating voltage DC max.       | 36 V |
| Current operating per port max. | 8 A  |
| Total current max.              | 12 A |

**Device protection | Electrical**

|                                              |       |
|----------------------------------------------|-------|
| Degree of protection (EN IEC 60529)          | IP20  |
| Insulation strength Power/Power (EN 60664-1) | 50 V  |
| Insulation strength ASI/Power                | 200 V |

**Mechanical data | Mounting data**

|                            |                           |
|----------------------------|---------------------------|
| Mounting method            | geschnappt                |
| Suitable for mounting type | mounting rail, (EN 60715) |
| Height                     | 61 mm                     |
| Width                      | 25 mm                     |
| Depth                      | 152 mm                    |

**Environmental characteristics | Climatic**

|                            |        |
|----------------------------|--------|
| Operating temperature min. | -20 °C |
| Operating temperature max. | 70 °C  |

**Conformity**

|                  |            |
|------------------|------------|
| Product standard | EN 60664-1 |
|------------------|------------|

**Connection type 6**

|                          |                    |
|--------------------------|--------------------|
| Connection type 1        | 11                 |
| Connection type 2        | 12                 |
| Connection type 3        | 13                 |
| Connection type 4        | 14                 |
| Connection type 5        | 15                 |
| Connection type 6        | Power / Asi        |
| Connection               | Screw terminals SK |
| Family construction form | terminal           |
| Gender                   | female             |
| Color contact carrier    | green              |
| No. of poles             | 2                  |
| PIN 1                    | 11 +               |
| PIN 2                    | 11 -               |
| Connection               | Screw terminals SK |
| Family construction form | terminal           |
| Gender                   | female             |
| Color contact carrier    | green              |
| No. of poles             | 2                  |
| PIN 1                    | 12 +               |
| PIN 2                    | 12 -               |
| Connection               | Screw terminals SK |
| Family construction form | terminal           |
| Gender                   | female             |
| Color contact carrier    | green              |
| No. of poles             | 2                  |

|                          |                    |
|--------------------------|--------------------|
| PIN 1                    | 13 +               |
| PIN 2                    | 13 -               |
| Connection               | Screw terminals SK |
| Family construction form | terminal           |
| Gender                   | female             |
| Color contact carrier    | green              |
| No. of poles             | 2                  |
| PIN 1                    | 14 +               |
| PIN 2                    | 14 -               |
| Connection               | Screw terminals SK |
| Family construction form | terminal           |
| Gender                   | female             |
| Color contact carrier    | green              |
| No. of poles             | 2                  |
| PIN 1                    | 15 +               |
| PIN 2                    | 15 -               |
| Connection               | Screw terminals SK |
| Family construction form | terminal           |
| Gender                   | female             |
| Color contact carrier    | green              |
| No. of poles             | 4                  |
| PIN 1                    | 1 +                |
| PIN 2                    | 1 -                |
| PIN 3                    | 2 +                |
| PIN 4                    | 2 -                |