

MSVD POWER SOCKET NEMA

Mounting rail

USA (2× NEMA 5-20)

Screw terminals


Each socket can be loaded with 20 A, however, the total load of both sockets must be below 30 A.

[Link til artikel](#)

Billede



Produktet kan afvige fra billedet

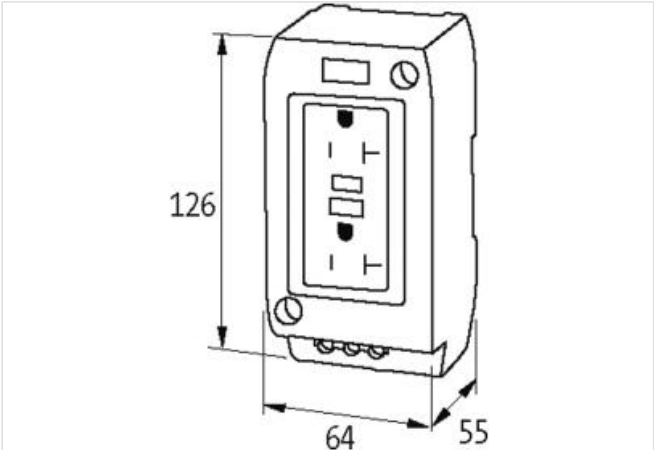

| Commercial data                 |                    |
|---------------------------------|--------------------|
| ECLASS-6.0                      | 27189217           |
| ECLASS-6.1                      | 27142305           |
| ECLASS-7.0                      | 27142305           |
| ECLASS-8.0                      | 27142305           |
| ECLASS-9.0                      | 27142305           |
| ECLASS-10.1                     | 27142305           |
| ECLASS-11.1                     | 27142305           |
| ECLASS-12.0                     | 27142305           |
| ETIM-5.0                        | EC000020           |
| customs tariff number           | 85366990           |
| GTIN                            | 4048879041362      |
| Pakke-enhed                     | 1                  |
| Electrical data   Supply        |                    |
| Operating voltage AC            | 125 V              |
| Operating current max.          | 20 A               |
| Installation                    |                    |
| Connection cross section max.   | 6 mm²              |
| Installation   Connection       |                    |
| Connection                      | Screw terminals SK |
| Mechanical data   Mounting data |                    |

|                            |                           |
|----------------------------|---------------------------|
| Mounting method            | geschnappt                |
| Suitable for mounting type | mounting rail, (EN 60715) |
| Height                     | 126 mm                    |
| Width                      | 64 mm                     |
| Depth                      | 55 mm                     |