


S-Lamp 22 L M12(4)

Lamp

S-Lamp 22 L M12(4)
Lamp
Mounting hole 22,3 mm
Connection M12 (4-pin)

[Link til artikel](#)

Billede

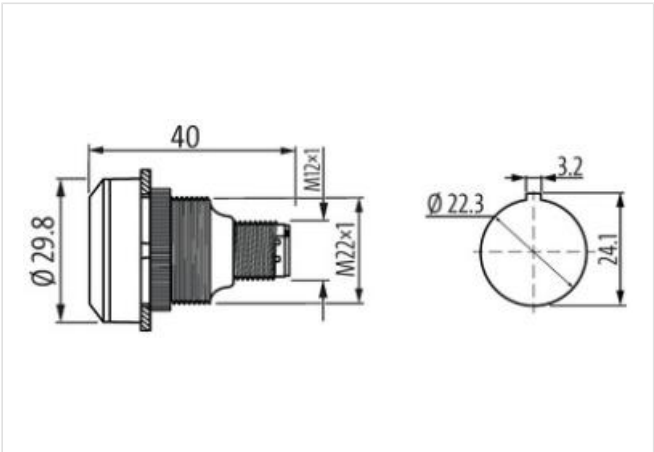

Produktet kan afvige fra billedet



Commercial data

ECLASS-6.1	27371223
ECLASS-7.0	27371223
ECLASS-8.0	27371223
ECLASS-9.0	27371223
ECLASS-10.1	27371223
ECLASS-11.1	27371223
ECLASS-12.0	27371223
ETIM-5.0	EC000272
customs tariff number	94054231
GTIN	4065909019245
Pakke-enhed	1

Electrical data | Supply

Operating voltage DC	24 V
Operating voltage DC min.	20 V
Operating voltage DC max.	28 V
Rated operating current	0,01 A
Operating current max.	12 mA

Electrical data | Input

Short-circuit current	1000 A
-----------------------	--------

Installation | Connection

Family construction form M12

Installation | Pin assignment

Coding A

No. of poles 4

Device protection | Electrical

Installation height max. ASL 2000 m

Degree of protection front (EN IEC 60529) IP66, IP67, IP69

Degree of protection back (EN IEC 60529) IP66, IP67

Pollution Degree 2

Short circuit protective device (SCPD) fuse 250 V / 0.1 A / 1.5 kA gG quick

Rated insulation voltage 250 V

Overvoltage category (EN 60950-1) II

Device protection | Mechanical

UL enclosure type rating front side type 4X

Device protection | Media

Salt-spray resistance (IEC 60068-2-11) yes

Mechanical data

Can be illuminated yes

Color black

Color collar black

Color illuminant white

Shape collar round

Type of illuminant LED

Mechanical data | Material data

Material housing Plastic

Mechanical data | Mounting data

Mounting method Threaded ring

Installation height 9,8 mm

Mounting depth 36,4 mm

Mounting hole 22,3 mm

Height 29,8 mm

Width 40 mm

Grid min. 30 mm

Environmental characteristics | Climatic

Operating temperature min. -25 °C

Operating temperature max. 70 °C

Derating from 40 °C

Storage temperature min. -40 °C

Storage temperature max. 90 °C

Relative humidity max. (operation) 93 %

Connection type 2

Family construction form M12

Gender male

Color contact carrier black

Coding A

No. of poles 4

PIN 2 LED (A)

PIN 3 LED (K)

Family construction form M12

Gender male

Coding	A
No. of poles	4
PIN 2	LED (A)
PIN 3	LED (K)