MURR ELEKTRONIK
stay connected

E-Stop 30 2NC M12(5)

Emergency-Stop

E-Stop 30 2NC M12(5)
Emergency-Stop
Mounting hole 30,3 mm
Connection M12 (5-polig)

Link til artikel

Billede

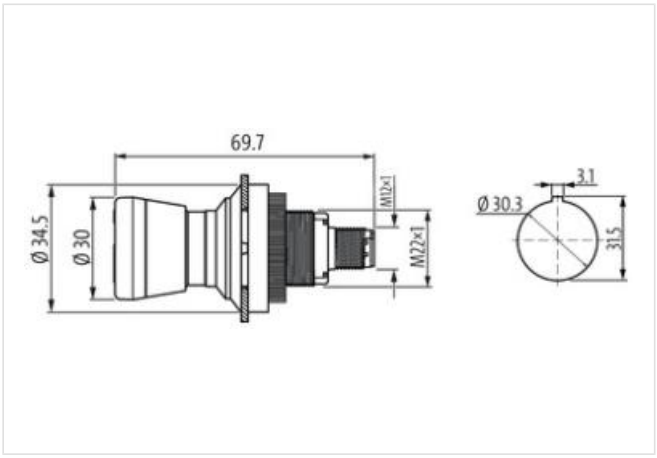

Produktet kan afvige fra billedet

Commercial data

ECLASS-6.1	27371244
ECLASS-7.0	27371244
ECLASS-8.0	27371244
ECLASS-9.0	27371244
ECLASS-10.1	27371244
ECLASS-11.1	27371244
ECLASS-12.0	27371244
customs tariff number	85365080
GTIN	4065909019610
Pakke-enhed	1

Electrical data | Supply

Rated operating voltage AC-15	35 V
Rated operating voltage DC-13	35 V

Electrical data | Input

Short-circuit current	1000 A

Electrical data | Output

Switching power max.	0,25 W
Voltage switching AC min.	1 V
Switching voltage AC max.	35 V
Switching voltage AC max. (UL 60947)	30 V

Oplysningerne i dette datablad er udarbejdet med størst mulig omhu.
Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 26.04.2024

MURR ELEKTRONIK
stay connected

Voltage switching DC min.	1 V
Switching voltage DC max.	35 V
Switching voltage DC max. (UL 60947)	30 V
Switching current min.	1 mA
Switching current max.	100 mA
Installation | Connection	
Family construction form	M12
Installation | Pin assignment	
Coding	A
No. of poles	5
Device protection | Electrical	
Installation height max. ASL	2000 m
Degree of protection front (EN IEC 60529)	IP65
Degree of protection back (EN IEC 60529)	IP65, IP67
Pollution Degree	2
Short circuit protective device (SCPD)	fuse 250 V / 0.1 A / 1.5 kA gG quick
Rated insulation voltage	250 V
Overvoltage category (EN 60950-1)	II
Device protection | Mechanical	
Mechanical endurance	50000 Cycles
Mechanical endurance B10	65000 Cycles
Operating life B10d	84500 Cycles
UL enclosure type rating front side	type 4X
Device protection | Media	
Salt-spray resistance (IEC 60068-2-11)	yes
Mechanical data	
Can be illuminated	no
Actuating function	latching
Color	red
Color collar	yellow
Shape collar	round
Contact type	2 Ö
Mechanical data | Material data	
Material housing	Plastic
Material contact	Gold
Mechanical data | Mounting data	
Mounting method	Threaded ring
Installation height	33,4 mm
Mounting depth	36,4 mm
Mounting hole	30,3 mm
Height	30 mm
Width	34,5 mm
Depth	69,7 mm
Grid min.	35 mm
Environmental characteristics | Climatic	
Operating temperature min.	-40 °C
Operating temperature max.	85 °C
Derating from	40 °C
Storage temperature min.	-40 °C
Storage temperature max.	90 °C
Relative humidity max. (operation)	93 %

Oplysningerne i dette datablad er udarbejdet med størst mulig omhu.
Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 26.04.2024

MURR ELEKTRONIK
stay connected

Connection type 1	
Family construction form	M12
Gender	male
Color contact carrier	black
Coding	A
No. of poles	5
PIN 1	NC 2
PIN 2	NC 1
PIN 4	NC 2
PIN 5	NC 2

Oplysningerne i dette datablad er udarbejdet med størst mulig omhu.
Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 26.04.2024