

M12-DISTRIBUTOR BOX 8-WAY, 5-POLE WITHOUT LED

MVC8-UE10.0-XA 10m PVC-CNOMO-cable 16x0,34/3x1


8-way, 5-pole
PVC (CNOMO)
10.0 m
without LED, up to 125 V AC/DC
Further cable lengths on request.

[Link til artikel](#)

Billede



Produktet kan afvige fra billedet

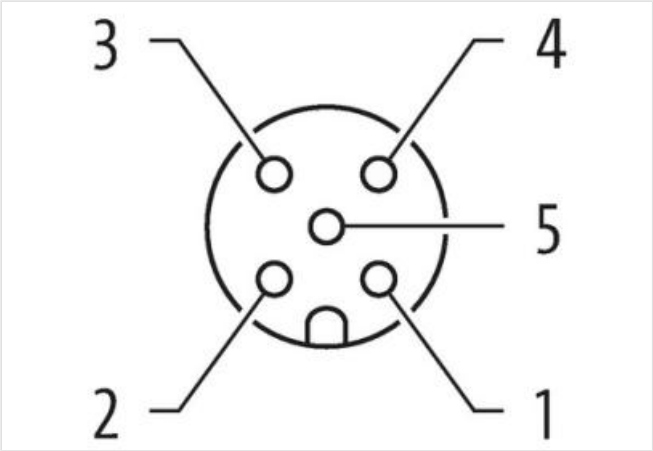

Commercial data	
ECLASS-6.0	27279219
ECLASS-7.0	27279219
ECLASS-8.0	27279219
ECLASS-9.0	27440108
ETIM-5.0	EC002585
customs tariff number	85444290
GTIN	4048879062299
Pakke-enhed	1
Electrical data Supply	
Operating voltage DC	24 V
Current operating per contact max.	4 A
Total current max.	10 A
Industrial communication	
Number of signals per port	2
Installation Connection	
Mounting set	M12 x 1
Device protection Electrical	
Degree of protection (EN IEC 60529)	IP67
Additional condition protection degree	inserted, screwed
Mechanical data Mounting data	
Mounting method	Schraubgewinde
Height	127 mm

Width	54 mm
Depth	29 mm

Environmental characteristics | Climatic

Operating temperature min.	-20 °C
Operating temperature max.	80 °C

Connection type 2

Family construction form	free cable end
No. of poles	19
Family construction form	M12
Gender	female
Color contact carrier	black
Coding	A
No. of poles	5
PIN 1	+
PIN 3	-
PIN 5	PE