

Diode and LED, 24VDC



48 V AC/DC

Diode + LED

For other configurations and voltages, please inquire.

Link til artikel

Billede

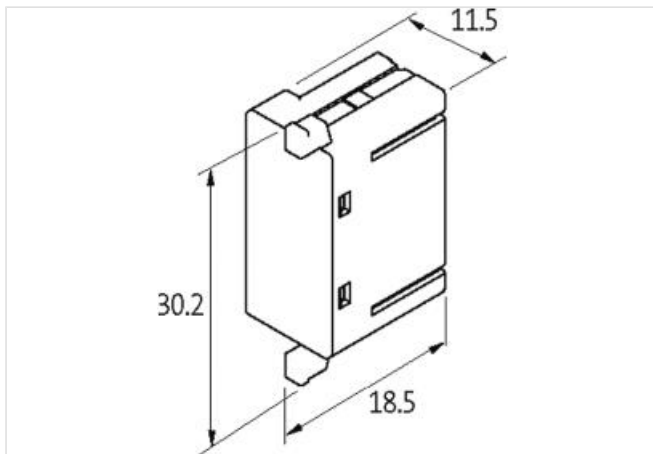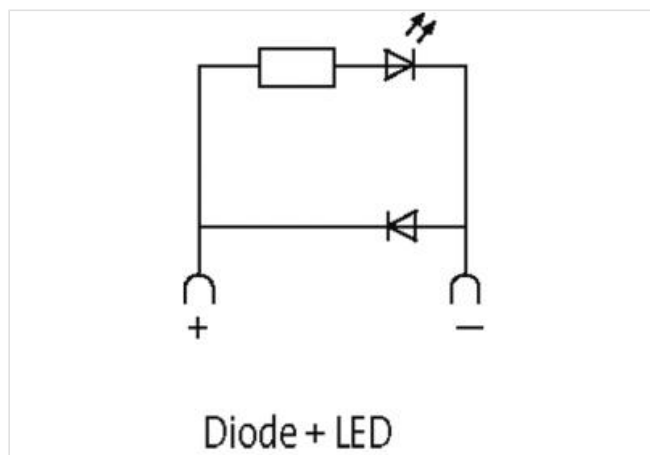

Produktet kan afvige fra billedet



ECLASS-6.0	27371013
ECLASS-6.1	27371013
ECLASS-7.0	27371013
ECLASS-8.0	27371013
ECLASS-9.0	27371013
ECLASS-10.1	27371013

Oplysningerne i dette datablad er udarbejdet med størst mulig omhu.

Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 07.05.2024

Murrelektronik ApS | Alexander Foss Gade 13, 1. | 9000 Aalborg | Fon +45 96 35 06 06 | Fax | shop@murrelektronik.dk | shop.murrelektronik.dk

ECLASS-11.1	27371013
ECLASS-12.0	27371013
ETIM-5.0	EC002498
customs tariff number	85363010
GTIN	4048879010894
Pakke-enhed	1
Compatibility Compatible with	
Appropriate contactors	3 RT 20.25/26/27/28
Electrical data	
Damping factor	1.5× UN
Electrical data Input	
Input voltage DC min.	21 V
Input voltage DC max.	27 V
Installation Connection	
Connection information	Plug contact
Device protection Media	
Flame resistance	flame retardant
Mechanical data Material data	
Combustibility class housing (UL94)	V-0
Material housing	Plastic
Mechanical data Mounting data	
Height	18,5 mm
Width	30,2 mm
Depth	11,5 mm
Environmental characteristics Climatic	
Operating temperature min.	-20 °C
Operating temperature max.	70 °C