


MODLINK MSDD DBL COMBI INSERT USA 2XNEMA 5-15

GFCI+1xRJ45 fem./fem.+1xUSB-A fem./fem.+1x3A fuse

- 2× NEMA-GFCI 5-15 (screw terminals)
- 1× RJ45, 8-pole metal, CAT5e (female/female)
- 1× USB 3.0 (female/female) form A
- 1× fuse (3 A)
- with touch protection

Link til artikel

Billede

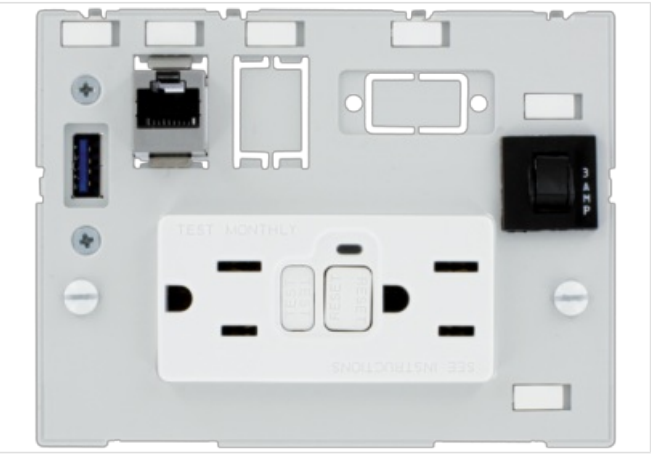

Produktet kan afvige fra billedet



| Commercial data                          |               |
|------------------------------------------|---------------|
| ECLASS-6.0                               | 27189217      |
| ECLASS-6.1                               | 27189217      |
| ECLASS-7.0                               | 27189217      |
| ECLASS-8.0                               | 27189217      |
| ECLASS-9.0                               | 27182806      |
| ECLASS-10.1                              | 27182806      |
| ECLASS-11.1                              | 27182806      |
| ECLASS-12.0                              | 27182806      |
| ETIM-5.0                                 | EC000020      |
| customs tariff number                    | 85366990      |
| GTIN                                     | 4048879369251 |
| Pakke-enhed                              | 1             |
| Mechanical data   Mounting data          |               |
| Height                                   | 88 mm         |
| Width                                    | 110 mm        |
| Depth                                    | 72 mm         |
| Environmental characteristics   Climatic |               |
| Storage temperature min.                 | -40 °C        |
| Storage temperature max.                 | 70 °C         |

| Fuse                                  |                    |
|---------------------------------------|--------------------|
| Operating voltage AC                  | 250 V              |
| Operating voltage DC                  | 32 V               |
| Nominal current                       | 3 A                |
| USA                                   |                    |
| Connection cross section max.         | 6 mm <sup>2</sup>  |
| AWG number max.                       | 10                 |
| Operating voltage AC                  | 125 V              |
| Operating current                     | 15 A               |
| Connection                            | Screw terminals SK |
| No. of poles                          | 2 + PE             |
| Connections per pole                  | 2                  |
| Protection contact present            | yes                |
| USB                                   |                    |
| Operating voltage AC                  | 48 V               |
| Operating voltage DC                  | 48 V               |
| Operating voltage AC max. (UL-listed) | 30 V               |
| Operating voltage DC max. (UL-listed) | 42,4 V             |
| Operating current                     | 1,5 A              |
| USB specification                     | 3.0                |
| Data transmission rate max.           | 5000 MBit/s        |
| Looking techniques                    | Snap-in connector  |
| RJ45                                  |                    |
| Operating voltage AC max. (UL-listed) | 30 V               |
| Operating voltage DC max. (UL-listed) | 42,4 V             |
| Current operating max. (UL)           | 175 mA             |
| Family construction form              | RJ45               |
| Family type Back side                 | RJ45               |
| Cable category min.                   | Cat5e              |
| Looking techniques                    | Snap-in connector  |