
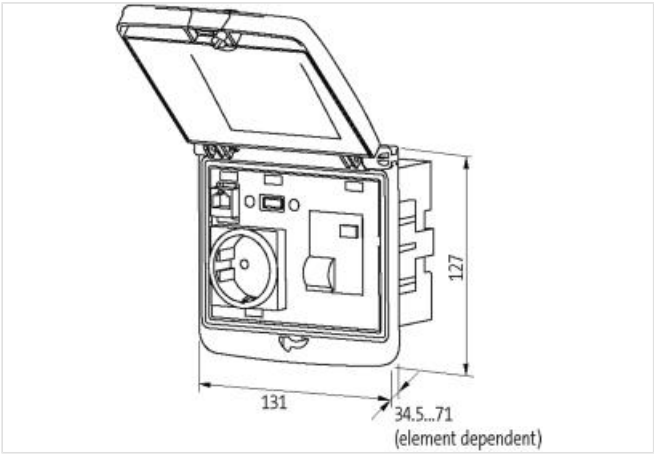


**Modlink MSDD-set: Frame 4000-68524-0000001,**  
insert 4000-68000-4300003

[Link til artikel](#)

Billede

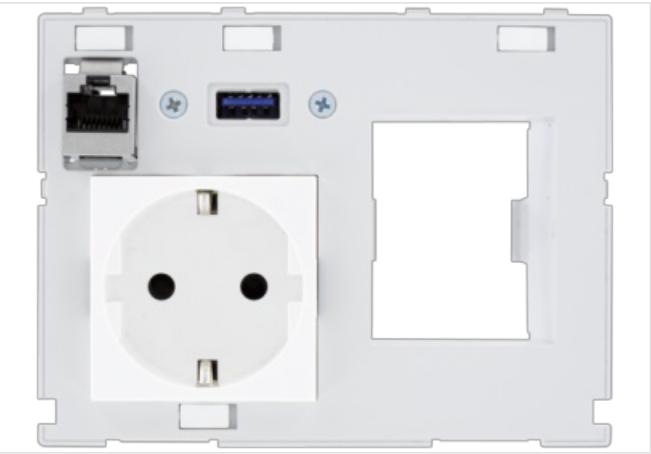

Produktet kan afvige fra billedet



| Commercial data |          |
|-----------------|----------|
| ECLASS-6.0      | 27144001 |
| ECLASS-6.1      | 27189217 |
| ECLASS-7.0      | 27189217 |
| ECLASS-8.0      | 27189217 |
| ECLASS-9.0      | 27189217 |
| ECLASS-10.1     | 27182806 |
| ECLASS-11.1     | 27182806 |
| ECLASS-12.0     | 27182806 |

|                       |               |
|-----------------------|---------------|
| ETIM-5.0              | EC002625      |
| customs tariff number | 85366990      |
| GTIN                  | 4048879460903 |
| Pakke-enhed           | 1             |

**Mechanical data | Mounting data**

|        |        |
|--------|--------|
| Height | 88 mm  |
| Width  | 116 mm |
| Depth  | 72 mm  |

**Frame**

|                                               |        |
|-----------------------------------------------|--------|
| Degree of protection (EN IEC 60529)           | IP65   |
| Operating temperature min.                    | -30 °C |
| Operating temperature max.                    | 70 °C  |
| Storage temperature min.                      | -30 °C |
| Storage temperature max.                      | 80 °C  |
| Suitable for installation wall thickness min. | 1 mm   |
| Suitable for installation wall thickness max. | 5 mm   |
| Color cover                                   | gray   |
| Color housing                                 | black  |
| Material lid                                  | PBT    |
| Material housing                              | PA     |

**Germany (VDE)**

|                               |                           |
|-------------------------------|---------------------------|
| Connection cross section max. | 2,5 mm <sup>2</sup>       |
| AWG number max.               | 14                        |
| Operating voltage AC          | 250 V                     |
| Operating current             | 16 A                      |
| Connection                    | Spring clamp terminals FK |
| No. of poles                  | 2 + PE                    |
| Connections per pole          | 2                         |
| Protection contact present    | yes                       |

**USB**

|                                       |                   |
|---------------------------------------|-------------------|
| Operating voltage AC                  | 48 V              |
| Operating voltage DC                  | 48 V              |
| Operating voltage AC max. (UL-listed) | 30 V              |
| Operating voltage DC max. (UL-listed) | 42,4 V            |
| Operating current                     | 1,5 A             |
| USB specification                     | 3.0               |
| Data transmission rate max.           | 5000 MBit/s       |
| Looking techniques                    | Snap-in connector |

**RJ45**

|                                       |                   |
|---------------------------------------|-------------------|
| Operating voltage AC max. (UL-listed) | 30 V              |
| Operating voltage DC max. (UL-listed) | 42,4 V            |
| Current operating max. (UL)           | 175 mA            |
| Family construction form              | RJ45              |
| Family type Back side                 | RJ45              |
| Cable category min.                   | Cat5e             |
| Looking techniques                    | Snap-in connector |