



MODLINK MSDD CABLE ENTRY SYSTEM

MKDP/S-Z 16

Suitable for standard cut-out 16-pole industrial connectors
Blind plate

[Link til artikel](#)

Billede

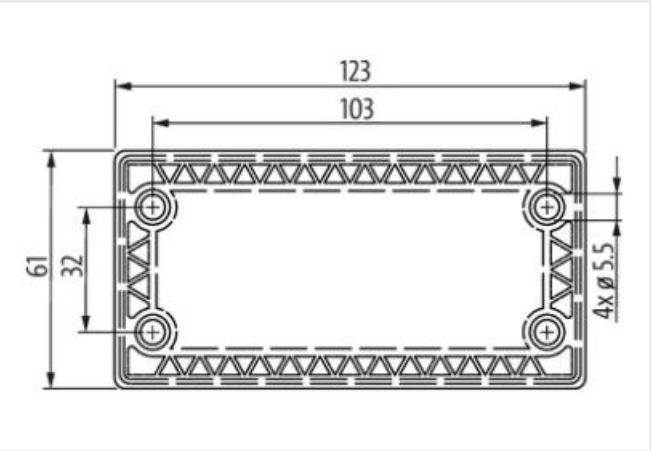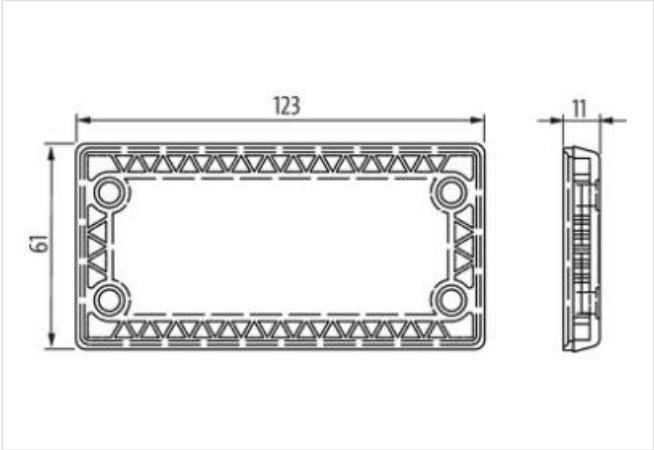

Produktet kan afvige fra billedet

Commercial data	
ECLASS-6.1	27189217
ECLASS-7.0	27189217
ECLASS-8.0	27189217
ECLASS-9.0	27189217
ECLASS-10.1	27182806
ECLASS-11.1	27182806
ECLASS-12.0	27182806
ETIM-5.0	EC000211
customs tariff number	39269097
GTIN	4065909062111
Pakke-enhed	1
Device protection Electrical	

Degree of protection (EN IEC 60529) IP67

Mechanical data | Material data

Color housing	black
Material housing	PP

Mechanical data | Mounting data

Net weight	50 g
Height cutout	36 mm
Width cutout	86 mm
Height	61 mm
Width	123 mm
Depth	11 mm
Hole diameter	5,5 mm

Environmental characteristics | Climatic

Storage temperature min.	-30 °C
Storage temperature max.	70 °C

Environmental product conformity

REACH	(EC) No 1907/2006
REACH-SVHC	(EC) No 1907/2006
RoHS	2011/65/EU & 2015/863
China RoHS II	SJ/T 11364-2014 - e
California Proposition 65	Compliant
WEEE	2012/19/EU Category 5
Halogen-free-Material	IEC 61249-2-21
Pb-free-Material	2011/65/EU