

Signal tower Modlight70 Pro equipped with LED modules

blue,clear,M12 plug downward


Basic + LED modules + M12 (down)
blue, clear

[Link til artikel](#)

Billede



Produktet kan afvige fra billedet

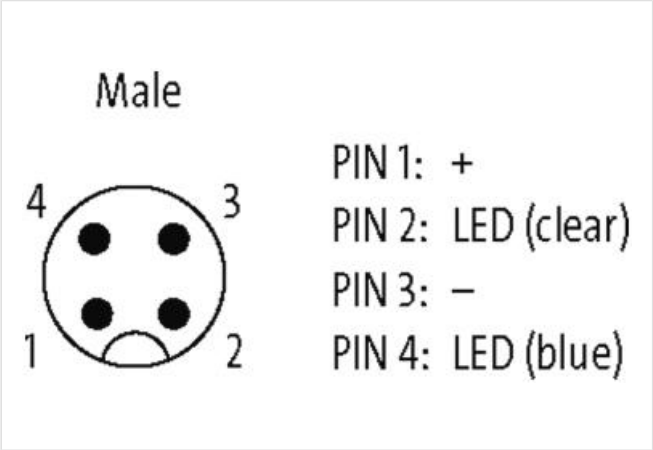

Commercial data	
ECLASS-6.0	27371230
ECLASS-6.1	27371230
ECLASS-7.0	27371230
ECLASS-8.0	27371230
ECLASS-9.0	27371230
ECLASS-10.1	27371230
ECLASS-11.1	27371230
ECLASS-12.0	27371230
ETIM-5.0	EC001042
customs tariff number	85318070
GTIN	4048879759960
Pakke-enhed	1
Electrical data Supply	
Operating voltage DC	24 V
Operating voltage DC min.	21,6 V
Operating voltage DC max.	26,4 V
Current consumption max.	90 mA
Device protection Electrical	
Degree of protection (EN IEC 60529)	IP65
Additional condition protection degree	inserted, locked
Mechanical data Material data	
Color housing	black

Material housing Plastic

Mechanical data | Mounting data

Height	179 mm
Width	70 mm
Depth	70 mm

Environmental characteristics | Climatic

Operating temperature min.	-20 °C
Operating temperature max.	50 °C

Connection type 2

Family construction form	M12
Gender	male
Coding	A
No. of poles	4
PIN 1	24 V DC (0 V)
PIN 2	LED-Modul CL
PIN 3	0 V (24 V DC)
PIN 4	LED-Modul BU
Mounting method	bayonet-locking