



# M8 male recept. A-cod. front incl. nut

PP-wires 3x0.25 0.2m

Flange male  
Flange M8 male  
M8, 3-pole  
with multi-strand wire  
Front mounting  
3-pole  
with multi-strand wire

## [Link til artikel](#)

### Billede

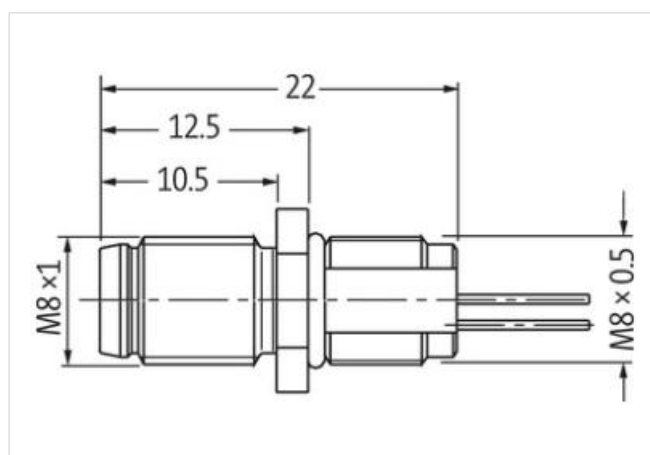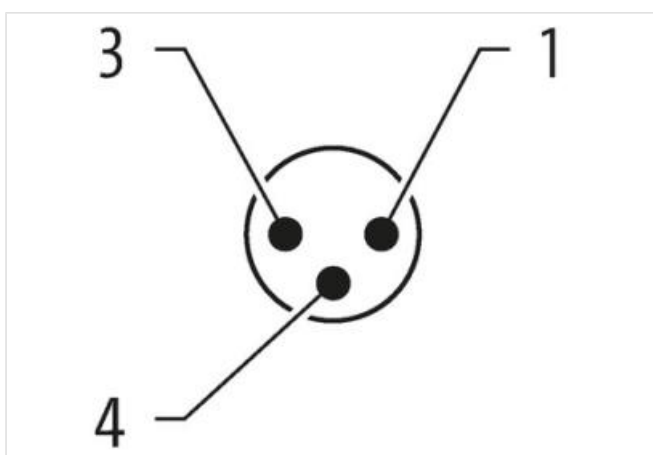

Produktet kan afvige fra billedet



Cable length 0,2 m

### Side 1

Tightening torque 0,4 Nm

Oplysningerne i dette datablad er udarbejdet med størst mulig omhu.

Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 28.04.2024

Murrelektronik ApS | Alexander Foss Gade 13, 1. | 9000 Aalborg | Fon +45 96 35 06 06 | Fax | shop@murrelektronik.dk | shop.murrelektronik.dk

|                                                 |                            |
|-------------------------------------------------|----------------------------|
| Mounting method                                 | inserted, screwed          |
| Family construction form                        | M8                         |
| Thread                                          | M8 x 1                     |
| Material                                        | Brass                      |
| No. of poles                                    | 3                          |
| Degree of protection (EN IEC 60529)             | IP67                       |
| <b>Commercial data</b>                          |                            |
| ECLASS-6.0                                      | 27279220                   |
| ECLASS-6.1                                      | 27279220                   |
| ECLASS-7.0                                      | 27440103                   |
| ECLASS-8.0                                      | 27440103                   |
| ECLASS-9.0                                      | 27440103                   |
| ECLASS-10.1                                     | 27440103                   |
| ECLASS-11.1                                     | 27440103                   |
| ECLASS-12.0                                     | 27440103                   |
| ETIM-5.0                                        | EC001855                   |
| customs tariff number                           | 85444290                   |
| GTIN                                            | 4048879508087              |
| Pakke-enhed                                     | 1                          |
| <b>Electrical data   Supply</b>                 |                            |
| Operating voltage AC max.                       | 50 V                       |
| Operating voltage DC max.                       | 60 V                       |
| Current operating per contact max.              | 4 A                        |
| <b>Diagnostics</b>                              |                            |
| Status indication LED                           | no                         |
| <b>Installation   Connection</b>                |                            |
| Mounting set                                    | M8 x 1                     |
| <b>Device protection   Electrical</b>           |                            |
| Protection NEMA                                 | 3, 4, 6P                   |
| Additional condition protection degree          | inserted, screwed          |
| Pollution Degree                                | 3                          |
| Rated surge voltage                             | 1,5 kV                     |
| Material group (IEC 60664-1)                    | I                          |
| <b>Mechanical data   Material data</b>          |                            |
| Coating locking                                 | nickel plated              |
| Coating of fitting                              | nickel plated              |
| Locking material                                | Brass                      |
| Material screw connection                       | Brass                      |
| <b>Mechanical data   Mounting data</b>          |                            |
| Mounting method                                 | Schraubgewinde             |
| Looking techniques                              | Schraubgewinde             |
| <b>Environmental characteristics   Climatic</b> |                            |
| Operating temperature min.                      | -25 °C                     |
| Operating temperature max.                      | 85 °C                      |
| Additional condition temperature range          | depending on cable quality |
| <b>Approvals</b>                                |                            |
| UL 50E                                          | yes                        |
| <b>Installation   Cable</b>                     |                            |
| Cable identification                            | 970                        |
| wire arrangement                                | brown, black, blue         |

|                                          |                                                      |
|------------------------------------------|------------------------------------------------------|
| Material wire insulation                 | PP                                                   |
| Amount wires                             | 3                                                    |
| Outer diameter insulation                | 1,1 mm                                               |
| Outer diameter tolerance core insulation | ± 5 %                                                |
| Conductor crosssection (wire)            | 0,25 mm <sup>2</sup>                                 |
| Min. operating temperature (static)      | -40 °C                                               |
| Max. operating temperature (fixed)       | 90 °C                                                |
| Operating temperature min. (dynamic)     | -25 °C                                               |
| Operating temperature max. (dynamic)     | 90 °C                                                |
| Flame resistance                         | UL 1581 § 1090   UL 1581 § 1100 FT2   IEC 60332-2-2  |
| chemical resistance                      | Good, application-related testing                    |
| Gasoline resistance                      | Good, application-related testing                    |
| Oil resistance                           | DIN EN 60811-404   Good, application-related testing |
| Bending radius (fixed)                   | 5 x Outer diameter                                   |