




Bus terminating plug M12 female A-cod.

Devicenet


DeviceNet, CANopen  
Terminating resistor  
Female  
M12 – M12, 5-pole (circuit diagram)  
A-coded

[Link til artikel](#)

Billede

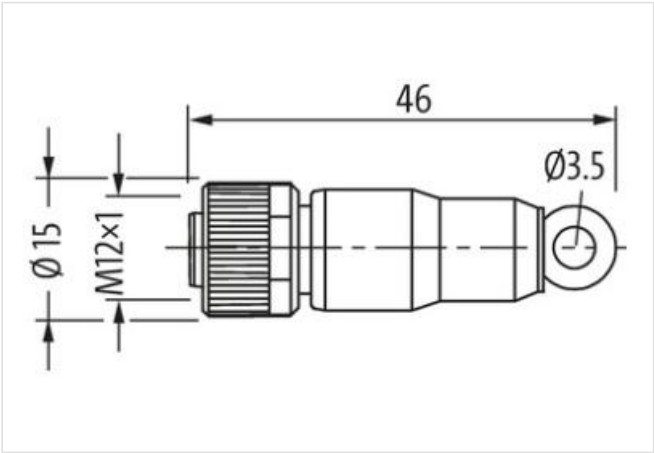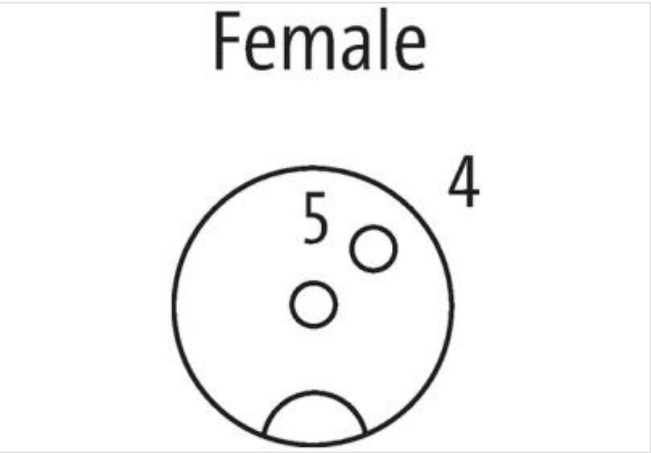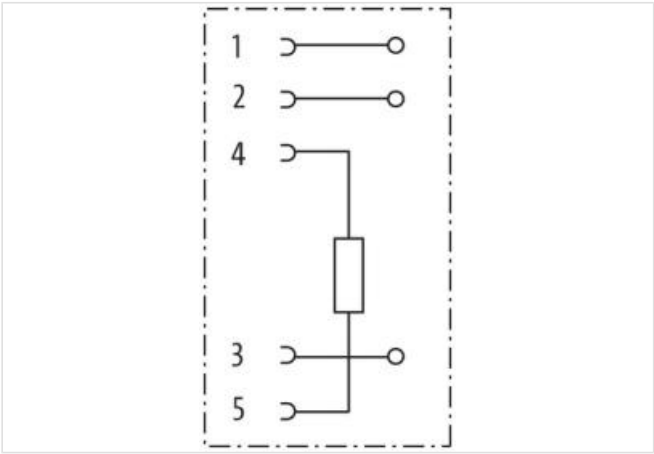

Produktet kan afvige fra billedet

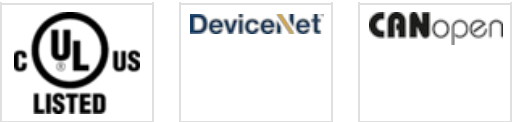

| Side 1                              |          |
|-------------------------------------|----------|
| Family construction form            | M12      |
| Degree of protection (EN IEC 60529) | IP67     |
| Commercial data                     |          |
| ECLASS-6.0                          | 19070403 |

|                       |               |
|-----------------------|---------------|
| ECLASS-6.1            | 27260702      |
| ECLASS-7.0            | 27440390      |
| ECLASS-8.0            | 27440190      |
| ECLASS-9.0            | 27440190      |
| ECLASS-10.1           | 27440190      |
| ECLASS-11.1           | 27440190      |
| ECLASS-12.0           | 27440190      |
| ETIM-5.0              | EC001855      |
| customs tariff number | 85332100      |
| GTIN                  | 4048879198752 |
| Pakke-enhed           | 1             |

**Electrical data | Supply**

|                                       |      |
|---------------------------------------|------|
| Operating voltage DC max.             | 30 V |
| Operating voltage DC max. (UL-listed) | 30 V |
| Current operating per contact max.    | 4 A  |

**Installation | Connection**

|                   |        |
|-------------------|--------|
| Tightening torque | 0,6 Nm |
|-------------------|--------|

**Device protection | Electrical**

|                                        |                   |
|----------------------------------------|-------------------|
| Additional condition protection degree | inserted, screwed |
|----------------------------------------|-------------------|

**Mechanical data | Material data**

|                  |                  |
|------------------|------------------|
| Coating locking  | Nickeled         |
| Locking material | Zinc die-casting |

**Mechanical data | Mounting data**

|                 |                                       |
|-----------------|---------------------------------------|
| Mounting method | inserted, screwed, Shaking protection |
|-----------------|---------------------------------------|

**Environmental characteristics | Climatic**

|                            |        |
|----------------------------|--------|
| Operating temperature min. | -25 °C |
| Operating temperature max. | 85 °C  |