

**SVS Eco valve plug A-18mm screw terminal**2-pol. + PE, 0,5 - 1,5mm<sup>2</sup>, 6 - 8mm, LED+VDR 230V

Form A (18 mm)

230 V AC/DC  $\pm 15\%$ 

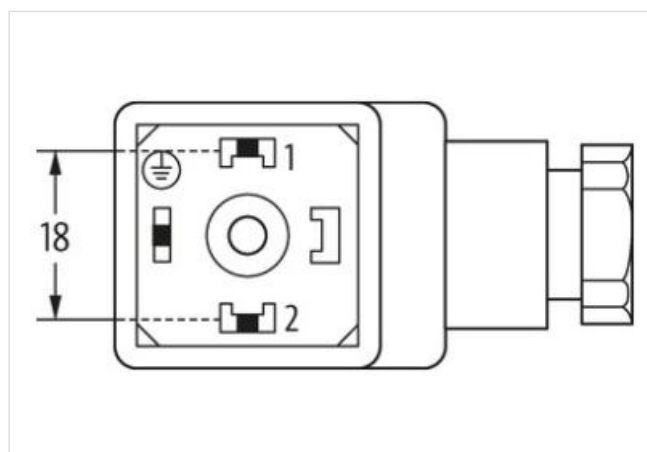
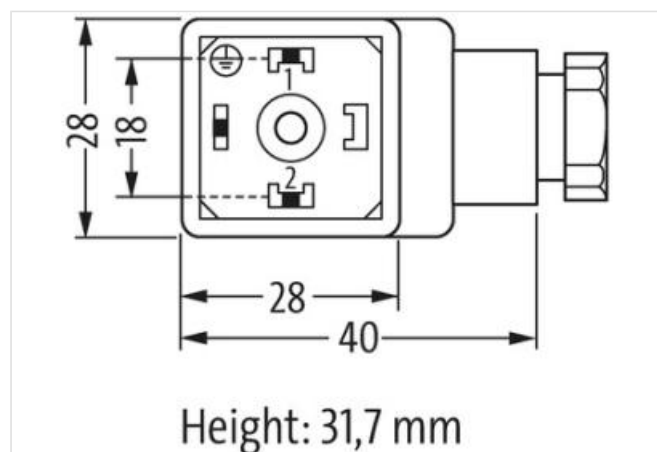
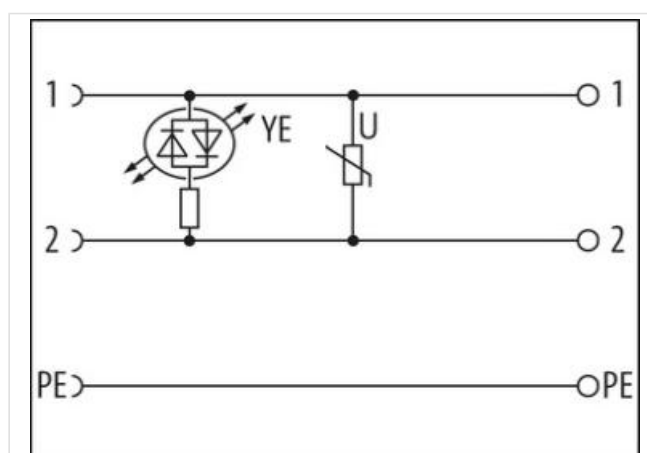
LED and VDR

metric

field-wireable

Plastic housings with good resistance against chemicals and oils.

The resistance to aggressive media should be individually tested for your application. Further details on request.

[Link til artikel](#)**Billede**

Produktet kan afvige fra billedet

**Side 1**

Mounting method inserted, screwed

Degree of protection (EN IEC 60529) IP65

**Commercial data**

Oplysningerne i dette datablad er udarbejdet med størst mulig omhu.

Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 04.05.2024

Murrelektronik ApS | Alexander Foss Gade 13, 1. | 9000 Aalborg | Fon +45 96 35 06 06 | Fax | shop@murrelektronik.dk | shop.murrelektronik.dk

|                       |               |
|-----------------------|---------------|
| ECLASS-6.0            | 27279221      |
| ECLASS-7.0            | 27440104      |
| ECLASS-8.0            | 27440104      |
| ECLASS-9.0            | 27440102      |
| ECLASS-10.1           | 27440105      |
| ECLASS-11.1           | 27440105      |
| ECLASS-12.0           | 27440105      |
| ETIM-5.0              | EC002062      |
| customs tariff number | 85366990      |
| GTIN                  | 4048879187558 |
| Pakke-enhed           | 1             |

#### Electrical data | Supply

|                                    |         |
|------------------------------------|---------|
| Operating voltage AC               | 230 V   |
| Operating voltage AC min.          | 195,5 V |
| Operating voltage AC max.          | 264,5 V |
| Operating voltage DC               | 230 V   |
| Operating voltage DC min.          | 195,5 V |
| Operating voltage DC max.          | 264,5 V |
| Current operating per contact max. | 1,5 A   |

#### Diagnostics

|                       |        |
|-----------------------|--------|
| Status indication LED | yellow |
|-----------------------|--------|

#### Installation

|                               |                     |
|-------------------------------|---------------------|
| Connection cross section min. | 0,5 mm <sup>2</sup> |
| Connection cross section max. | 1,5 mm <sup>2</sup> |

#### Installation | Connection

|                                  |           |
|----------------------------------|-----------|
| Tightening torque                | 0,4 Nm    |
| Tightening torque clamping screw | 0,2 Nm    |
| Mounting set                     | M16 x 1.5 |

#### Installation | Pin assignment

|              |        |
|--------------|--------|
| No. of poles | 2 + PE |
|--------------|--------|

#### Device protection | Electrical

|                                        |                   |
|----------------------------------------|-------------------|
| Additional condition protection degree | inserted, screwed |
| Additional suppressor                  | Varistor          |

#### Mechanical data | Material data

|                  |             |
|------------------|-------------|
| Color housing    | transparent |
| Material gasket  | NBR         |
| Material housing | PA          |

#### Mechanical data | Mounting data

|                     |      |
|---------------------|------|
| fastening screw     | M3   |
| Clamping range min. | 6 mm |
| Clamping range max. | 8 mm |

#### Environmental characteristics | Climatic

|                            |        |
|----------------------------|--------|
| Operating temperature min. | -40 °C |
| Operating temperature max. | 90 °C  |

#### Important installation notes

|                        |                                                                                                                                                       |
|------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------|
| Note on strain relief  | Protect the connectors by suitable measures from mechanical loads, e.g. by the usage of cable ties.                                                   |
| Note on bending radius | <b>Attention:</b> Observe the permissible bending radii when laying cables, as the IP protection class can be endangered by excessive bending forces. |