

SVS VALVE PLUG FORM B 10 MM FIELD-WIREABLE

24V LED+RC PG9

Form B (10 mm)

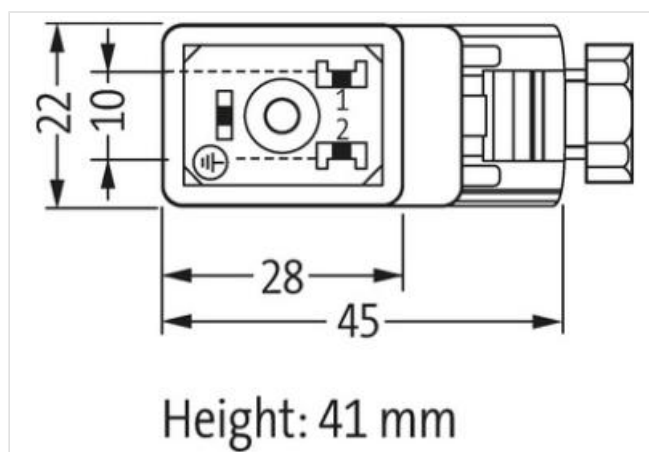
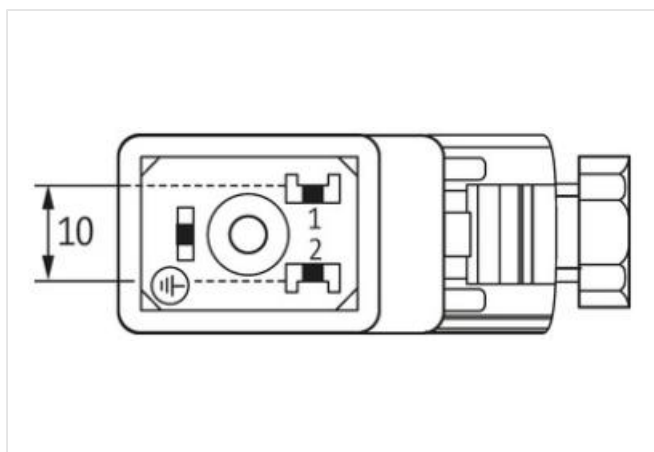
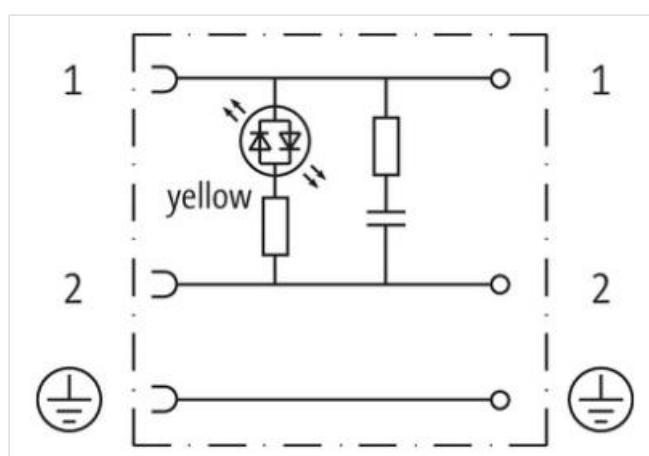
24 V AC/DC $\pm 25\%$

LED and RC

PG9

Plastic housings with good resistance against chemicals and oils.

The resistance to aggressive media should be individually tested for your application. Further details on request.

[Link til artikel](#)
Billede


Produktet kan afvige fra billedet

Side 1

Degree of protection (EN IEC 60529)

IP65

Commercial data

ECLASS-6.0	27279221
ECLASS-7.0	27440104
ECLASS-8.0	27440104
ECLASS-9.0	27440102
ETIM-5.0	EC002062
customs tariff number	85366990

GTIN 4048879187312

Pakke-enhed 1

Electrical data | Supply

Operating voltage AC 24 V

Operating voltage AC min. 18 V

Operating voltage AC max. 30 V

Operating voltage DC 24 V

Operating voltage DC min. 18 V

Operating voltage DC max. 30 V

Current operating per contact max. 2 A

Installation | Connection

Tightening torque 0,4 Nm

Mounting set M3

Installation | Pin assignment

No. of poles 2 + PE

Device protection | Electrical

Additional condition protection degree inserted, screwed

Environmental characteristics | Climatic

Operating temperature min. -20 °C

Operating temperature max. 60 °C