

SVS VALVE PLUG FORM B 10 MM FIELD-WIREABLE




230V LED+VDR PG9

Form B (10 mm)  
230 V AC  $\pm 10\%$   
LED and RC  
PG9

Plastic housings with good resistance against chemicals and oils.  
The resistance to aggressive media should be individually tested for your application. Further details on request.

Link til artikel

Billede

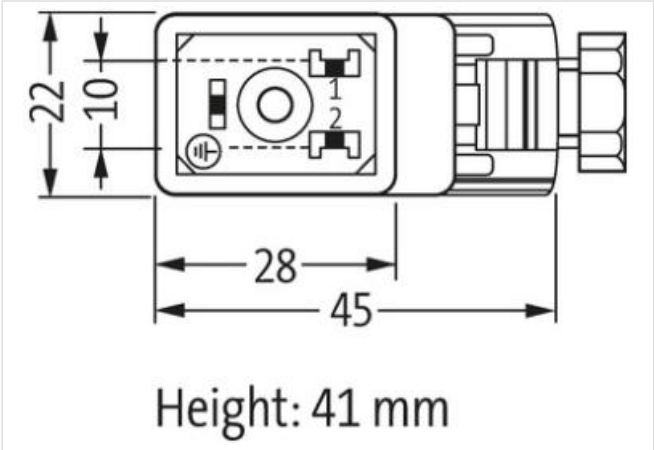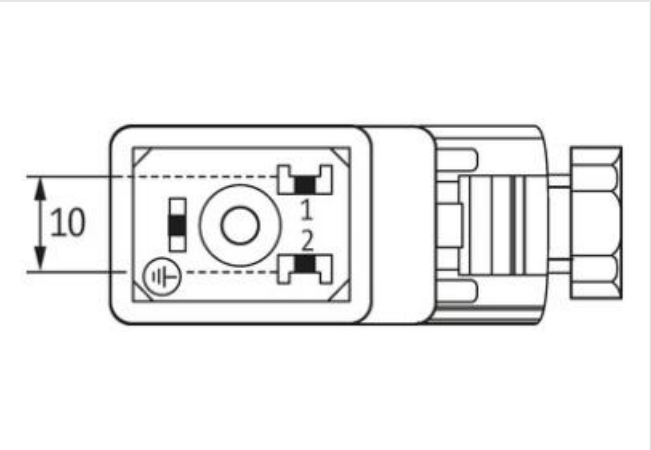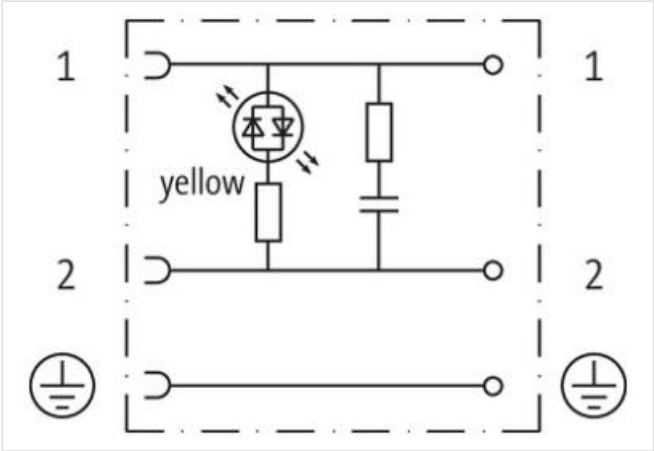

Produktet kan afvige fra billedet

| Side 1                              |          |
|-------------------------------------|----------|
| Degree of protection (EN IEC 60529) | IP65     |
| Commercial data                     |          |
| ECLASS-6.0                          | 27279221 |
| ECLASS-7.0                          | 27440104 |
| ECLASS-8.0                          | 27440104 |
| ECLASS-9.0                          | 27440102 |
| ETIM-5.0                            | EC002062 |
| customs tariff number               | 85366990 |

|      |               |
|------|---------------|
| GTIN | 4048879187237 |
|------|---------------|

|             |   |
|-------------|---|
| Pakke-enhed | 1 |
|-------------|---|

**Electrical data**

|             |       |
|-------------|-------|
| Capacity CX | 15 ms |
|-------------|-------|

|                    |      |
|--------------------|------|
| Holding power max. | 50 W |
|--------------------|------|

**Electrical data | Supply**

|                      |       |
|----------------------|-------|
| Operating voltage AC | 230 V |
|----------------------|-------|

|                           |       |
|---------------------------|-------|
| Operating voltage AC min. | 207 V |
|---------------------------|-------|

|                           |       |
|---------------------------|-------|
| Operating voltage AC max. | 253 V |
|---------------------------|-------|

|                           |       |
|---------------------------|-------|
| Cut-off peak voltage max. | 450 V |
|---------------------------|-------|

|                                    |     |
|------------------------------------|-----|
| Current operating per contact max. | 1 A |
|------------------------------------|-----|

|                          |       |
|--------------------------|-------|
| Current consumption max. | 12 mA |
|--------------------------|-------|

**Diagnostics**

|                       |        |
|-----------------------|--------|
| Status indication LED | yellow |
|-----------------------|--------|

**Installation**

|                               |                     |
|-------------------------------|---------------------|
| Connection cross section max. | 1,5 mm <sup>2</sup> |
|-------------------------------|---------------------|

**Installation | Connection**

|                   |        |
|-------------------|--------|
| Tightening torque | 0,4 Nm |
|-------------------|--------|

|              |    |
|--------------|----|
| Mounting set | M3 |
|--------------|----|

**Device protection | Electrical**

|                                        |                                         |
|----------------------------------------|-----------------------------------------|
| Additional condition protection degree | inserted, locked, with screw connection |
|----------------------------------------|-----------------------------------------|

**Mechanical data | Mounting data**

|                 |     |
|-----------------|-----|
| Mounting method | PG9 |
|-----------------|-----|

|                     |      |
|---------------------|------|
| Clamping range min. | 6 mm |
|---------------------|------|

|                     |      |
|---------------------|------|
| Clamping range max. | 8 mm |
|---------------------|------|

**Environmental characteristics | Climatic**

|                            |        |
|----------------------------|--------|
| Operating temperature min. | -20 °C |
|----------------------------|--------|

|                            |       |
|----------------------------|-------|
| Operating temperature max. | 60 °C |
|----------------------------|-------|