




SVS Eco valve plug CI-9.4mm screw terminal

3-pol. + PE, max. 0,5mm², 5 -6mm

Form CI (9.4 mm)  
max. 250 V AC/DC  
without components  
metric  
field-wireable  
Plastic housings with good resistance against chemicals and oils.  
The resistance to aggressive media should be individually tested for your application. Further details on request.

Link til artikel

Billede

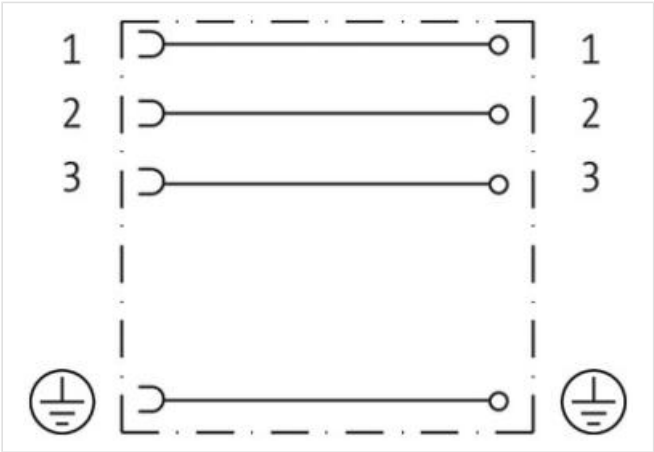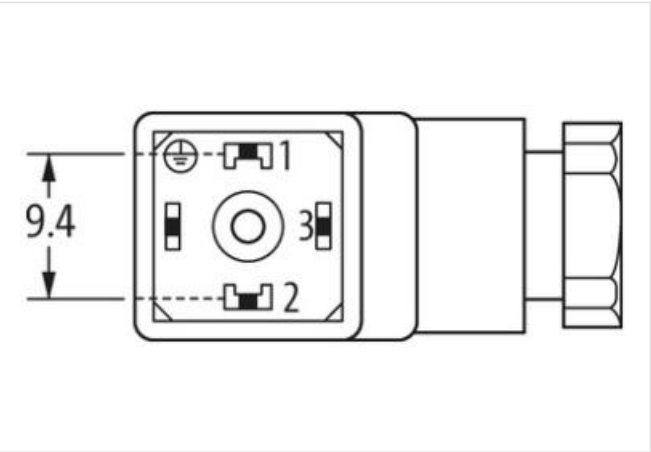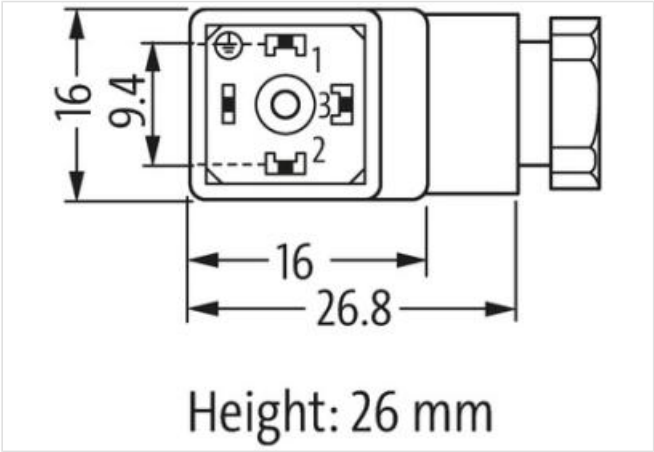

Produktet kan afvige fra billedet

| Side 1                              |                   |
|-------------------------------------|-------------------|
| Mounting method                     | inserted, screwed |
| Degree of protection (EN IEC 60529) | IP65              |
| Commercial data                     |                   |
| ECLASS-6.0                          | 27279221          |
| ECLASS-7.0                          | 27440104          |
| ECLASS-8.0                          | 27440104          |
| ECLASS-9.0                          | 27440102          |

|                       |               |
|-----------------------|---------------|
| ECLASS-10.1           | 27440105      |
| ECLASS-11.1           | 27440105      |
| ECLASS-12.0           | 27440105      |
| ETIM-5.0              | EC002062      |
| customs tariff number | 85366990      |
| GTIN                  | 4048879513715 |
| Pakke-enhed           | 1             |

**Electrical data | Supply**

|                                    |       |
|------------------------------------|-------|
| Operating voltage AC max.          | 250 V |
| Operating voltage DC max.          | 250 V |
| Current operating per contact max. | 6 A   |

**Installation**

|                               |                     |
|-------------------------------|---------------------|
| Connection cross section max. | 0,5 mm <sup>2</sup> |
|-------------------------------|---------------------|

**Installation | Connection**

|                                  |           |
|----------------------------------|-----------|
| Tightening torque                | 0,4 Nm    |
| Tightening torque clamping screw | 0,2 Nm    |
| Mounting set                     | M12 x 1.5 |

**Installation | Pin assignment**

|              |        |
|--------------|--------|
| No. of poles | 3 + PE |
|--------------|--------|

**Device protection | Electrical**

|                                        |                  |
|----------------------------------------|------------------|
| Additional condition protection degree | inserted, locked |
|----------------------------------------|------------------|

**Mechanical data | Material data**

|                 |     |
|-----------------|-----|
| Material gasket | NBR |
|-----------------|-----|

**Mechanical data | Mounting data**

|                     |      |
|---------------------|------|
| fastening screw     | M3   |
| Clamping range min. | 5 mm |
| Clamping range max. | 6 mm |

**Environmental characteristics | Climatic**

|                            |        |
|----------------------------|--------|
| Operating temperature min. | -40 °C |
| Operating temperature max. | 90 °C  |

**Important installation notes**

|                        |                                                                                                                                                       |
|------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------|
| Note on strain relief  | Protect the connectors by suitable measures from mechanical loads, e.g. by the usage of cable ties.                                                   |
| Note on bending radius | <b>Attention:</b> Observe the permissible bending radii when laying cables, as the IP protection class can be endangered by excessive bending forces. |