

**M12 male 0° / M8 female 0° A-cod.**

PUR 3x0.25 bk UL/CSA+drag ch. 3m

Male straight – female straight

M12 – M8, 3-pole



Art-No. 7005 - M12 Lite - (plastic hexagonal screw) on request

Art-No. 7005 - M8 Lite - (plastic hexagonal screw) on request


Plastic housings with good resistance against chemicals and oils.



The resistance to aggressive media should be individually tested for your application. Further details on request.

Further cable lengths on request.

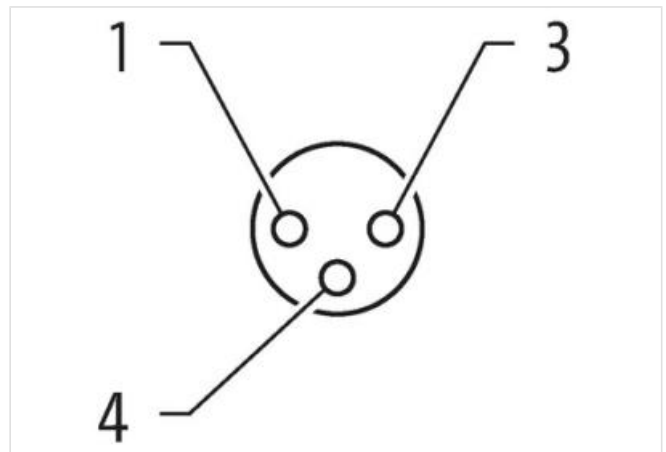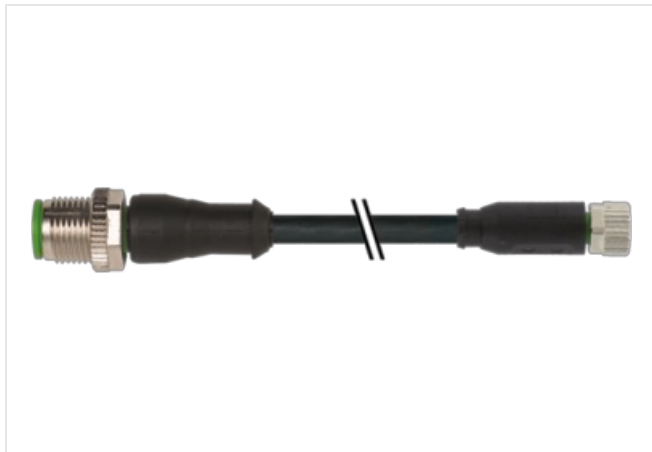[Link til artikel](#)**Billede**

|   |    |   |
|---|----|---|
| 1 | BN | 1 |
|   |    | 2 |
| 3 | BU | 3 |
| 4 | BK | 4 |

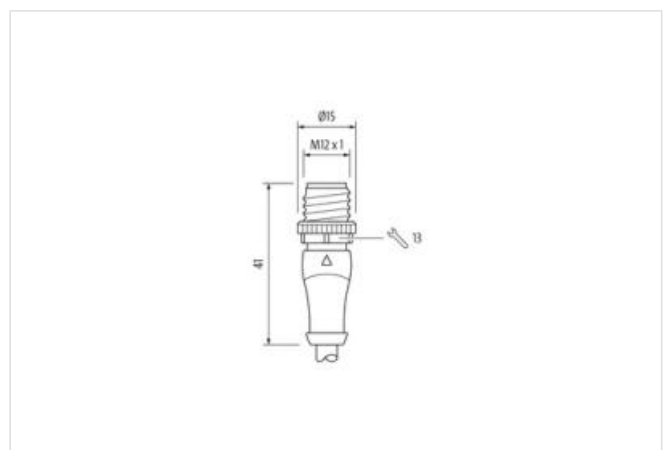

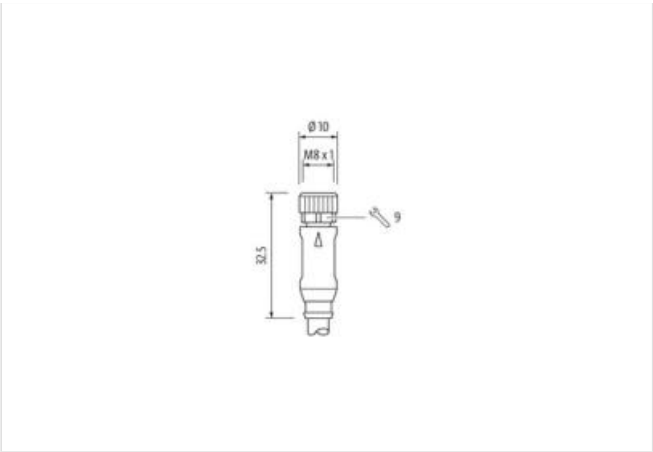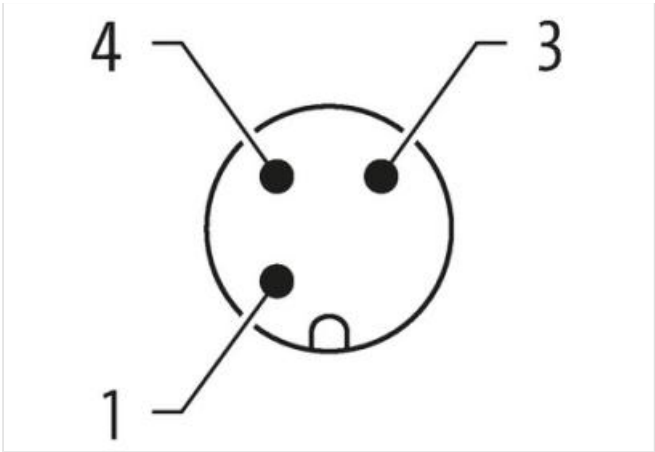

Produktet kan afvige fra billedet



|                                           |                    |
|-------------------------------------------|--------------------|
| Cable length                              | 3 m                |
| Side 1                                    |                    |
| Tightening torque                         | 0,6 Nm             |
| Mounting method                           | inserted, screwed  |
| Family construction form                  | M12                |
| Thread                                    | M12 x 1            |
| suitable for corrugated tube (internal Ø) | 10 mm              |
| Coding                                    | A                  |
| Material                                  | PUR                |
| Width across flats                        | SW13               |
| Degree of protection (EN IEC 60529)       | IP65, IP66K, IP67  |
| Side 2                                    |                    |
| Tightening torque                         | 0,4 Nm             |
| Mounting method                           | inserted, screwing |
| Family construction form                  | M8                 |
| Thread                                    | M8 x 1             |
| suitable for corrugated tube (internal Ø) | 6,5 mm             |
| Coding                                    | A                  |
| Material                                  | PUR                |
| Width across flats                        | SW9                |
| Commercial data                           |                    |
| ECLASS-6.0                                | 27279218           |
| ECLASS-7.0                                | 27279218           |
| ECLASS-8.0                                | 27279218           |
| ECLASS-9.0                                | 27060311           |
| ECLASS-10.1                               | 27060311           |
| ECLASS-11.1                               | 27060311           |
| ECLASS-12.0                               | 27060311           |
| ETIM-5.0                                  | EC001855           |
| customs tariff number                     | 85444290           |
| GTIN                                      | 4048879163033      |
| Pakke-enhed                               | 1                  |

| Electrical data   Supply                 |                                                                                                                                                       |
|------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------|
| Operating voltage AC max.                | 50 V                                                                                                                                                  |
| Operating voltage DC max.                | 60 V                                                                                                                                                  |
| Operating voltage AC (UL-listed)         | 30 V                                                                                                                                                  |
| Operating voltage DC (UL-listed)         | 30 V                                                                                                                                                  |
| Current operating per contact max.       | 4 A                                                                                                                                                   |
| Device protection   Electrical           |                                                                                                                                                       |
| Additional condition protection degree   | inserted, screwed                                                                                                                                     |
| Pollution Degree                         | 3                                                                                                                                                     |
| Rated surge voltage                      | 1,5 kV                                                                                                                                                |
| Material group (IEC 60664-1)             | I                                                                                                                                                     |
| Mechanical data   Material data          |                                                                                                                                                       |
| Coating locking                          | Nickeled                                                                                                                                              |
| Coating of fitting                       | nickel plated                                                                                                                                         |
| Material gasket                          | FKM                                                                                                                                                   |
| Locking material                         | Zinc die-casting                                                                                                                                      |
| Material screw connection                | Zinc die-casting                                                                                                                                      |
| Mechanical data   Mounting data          |                                                                                                                                                       |
| Mounting method                          | inserted, screwed, Shaking protection                                                                                                                 |
| Environmental characteristics   Climatic |                                                                                                                                                       |
| Operating temperature min.               | -25 °C                                                                                                                                                |
| Operating temperature max.               | 85 °C                                                                                                                                                 |
| Additional condition temperature range   | depending on cable quality                                                                                                                            |
| Important installation notes             |                                                                                                                                                       |
| Note on strain relief                    | Protect the connectors by suitable measures from mechanical loads, e.g. by the usage of cable ties.                                                   |
| Note on bending radius                   | <b>Attention:</b> Observe the permissible bending radii when laying cables, as the IP protection class can be endangered by excessive bending forces. |
| Conformity                               |                                                                                                                                                       |
| Product standard                         | DIN EN 61076-2-101 (M12), DIN EN 61076-2-114 (M8)                                                                                                     |
| Installation   Cable                     |                                                                                                                                                       |
| wire arrangement                         | brown, black, blue                                                                                                                                    |
| Cable identification                     | 630                                                                                                                                                   |
| Cable Type                               | 3                                                                                                                                                     |
| Jacket Color                             | black                                                                                                                                                 |
| Type of Certificate                      | cURus                                                                                                                                                 |
| Amount stranding                         | 1                                                                                                                                                     |
| Stranding                                | 3 wires twisted                                                                                                                                       |
| wire arrangement                         | brown, black, blue                                                                                                                                    |
| Cable weight                             | 26,4 g/m                                                                                                                                              |
| Material jacket                          | PUR                                                                                                                                                   |
| Shore hardness jacket                    | 90 ± 5 Shore A                                                                                                                                        |
| Freedom from ingredients (jacket)        | lead-free, cadmium-free, CFC-free, halogen-free, silicone-free                                                                                        |
| Outer-diameter (jacket)                  | 4,1 mm                                                                                                                                                |
| Tolerance outer diameter (sheath)        | ± 5 %                                                                                                                                                 |
| Material wire insulation                 | PP                                                                                                                                                    |
| Amount wires                             | 3                                                                                                                                                     |
| Outer diameter insulation                | 1,25 mm                                                                                                                                               |
| Outer diameter tolerance core insulation | ± 5 %                                                                                                                                                 |
| Shore hardness wire insulation           | 70 ± 5 Shore D                                                                                                                                        |
| Ingredient freeness wire insulation      | lead-free, cadmium-free, CFC-free, halogen-free, silicone-free                                                                                        |
| Amount strands (wire)                    | 32                                                                                                                                                    |
| Diameter of single wires                 | 0,1 mm                                                                                                                                                |

Oplysningerne i dette datablad er udarbejdet med størst mulig omhu.

Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 18.05.2024

Murrelektronik ApS | Alexander Foss Gade 13, 1. | 9000 Aalborg | Fon +45 96 35 06 06 | Fax | shop@murrelektronik.dk | shop.murrelektronik.dk

|                                                   |                                                      |
|---------------------------------------------------|------------------------------------------------------|
| Conductor crosssection (wire)                     | 0,25 mm <sup>2</sup>                                 |
| Material conductor wire                           | Stranded copper wire, bare                           |
| Conductor type (wire)                             | strand class 6                                       |
| Nominal voltage AC max.                           | 300 V                                                |
| Current load capacity (standard)                  | to DIN VDE 0298-4                                    |
| Current load capacity min. wire                   | 4,5 A                                                |
| Electrical resistance line constant wire          | 79 Ω/km @ 20 °C                                      |
| AC withstand voltage (wire - wire)                | 2,5 kV @ 60 s                                        |
| Power frequency withstand voltage (wire - jacket) | 2,5 kV @ 60 s                                        |
| Min. operating temperature (static)               | -40 °C                                               |
| Max. operating temperature (fixed)                | 80 °C / 90 °C @ 10000 h Operation                    |
| Operating temperature min. (dynamic)              | -25 °C                                               |
| Operating temperature max. (dynamic)              | 80 °C / 90 °C @ 10000 h Operation                    |
| UV resistance                                     | DIN EN ISO 4892-2 A                                  |
| Flame resistance                                  | UL 1581 § 1090   UL 1581 § 1100 FT2   IEC 60332-2-2  |
| chemical resistance                               | Good, application-related testing                    |
| Gasoline resistance                               | Good, application-related testing                    |
| Oil resistance                                    | Good, application-related testing   DIN EN 60811-404 |
| Bending radius (fixed)                            | 5 x Outer diameter                                   |
| Bending radius (dynamic)                          | 10 x Outer diameter                                  |
| No. of bending cycles (C-track)                   | 10 Mio. @ 25 °C                                      |
| Traversing distance (C-track)                     | 10 m @ 25 °C   horizontal                            |
| Travel speed (C-track)                            | 3 m/s @ 25 °C                                        |
| No. of torsion cycles                             | 2 Mio.                                               |
| Torsion stress                                    | ± 180 °/m                                            |
| Torsion speed                                     | 35 cycles/min                                        |