

# M12 male 0° / M8 female 90° A-cod. LED

PVC 3x0.25 bk UL/CSA 1m

Male straight – female 90°

M12 – M8, 3-pole

LED (yellow/green)





Plastic housings with good resistance against chemicals and oils.

The resistance to aggressive media should be individually tested for your application. Further details on request.

Further cable lengths on request.

## Link til artikel

### Billede

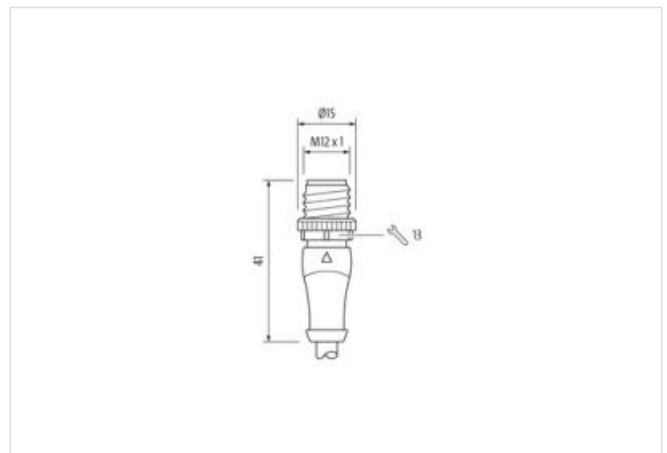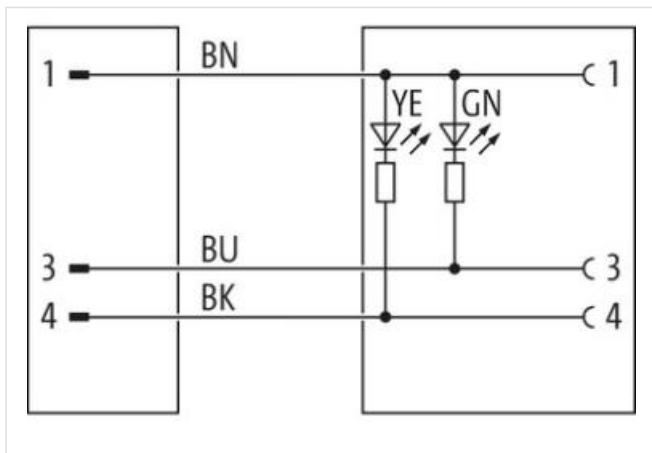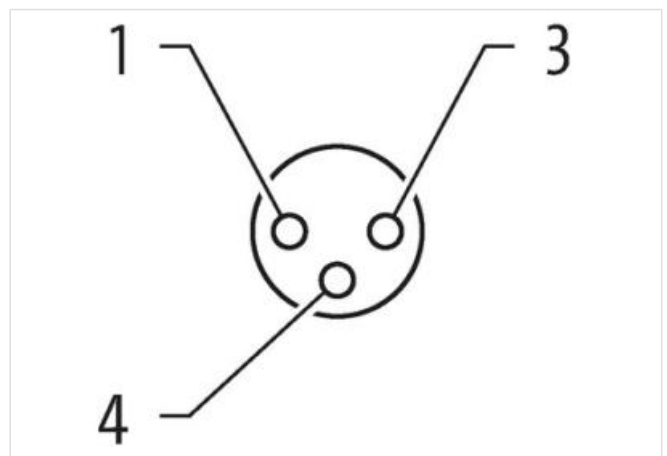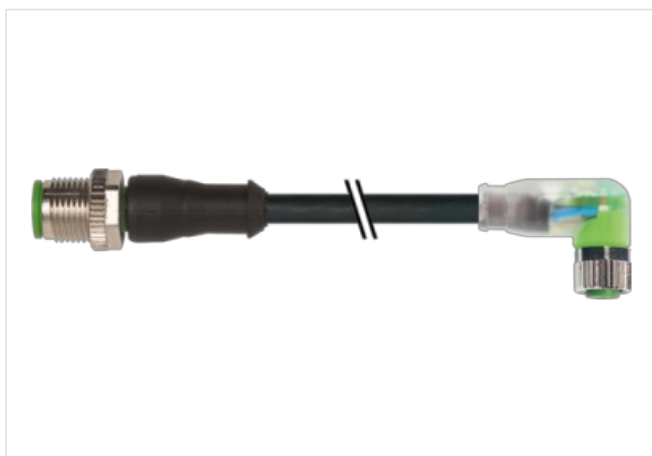



Produktet kan afvige fra billedet



|                                           |                   |
|-------------------------------------------|-------------------|
| Cable length                              | 1 m               |
| Side 1                                    |                   |
| Tightening torque                         | 0,6 Nm            |
| Mounting method                           | inserted, screwed |
| Coating contact                           | gold plated       |
| Family construction form                  | M12               |
| Thread                                    | M12 x 1           |
| suitable for corrugated tube (internal Ø) | 10 mm             |
| Material contact                          | Copper alloy      |
| Material                                  | PUR               |
| No. of poles                              | 3                 |
| Width across flats                        | SW13              |
| Degree of protection (EN IEC 60529)       | IP66K, IP67       |
| Side 2                                    |                   |
| Tightening torque                         | 0,4 Nm            |
| Mounting method                           | inserted, screwed |
| Coating contact                           | gold plated       |
| Family construction form                  | M8                |
| Thread                                    | M8 x 1            |
| suitable for corrugated tube (internal Ø) | 6,5 mm            |
| Material contact                          | Copper alloy      |
| Material                                  | PUR               |
| No. of poles                              | 3                 |
| Width across flats                        | SW9               |
| Degree of protection (EN IEC 60529)       | IP66K, IP67       |
| Commercial data                           |                   |
| ECLASS-6.0                                | 27279218          |
| ECLASS-7.0                                | 27279218          |
| ECLASS-8.0                                | 27279218          |
| ECLASS-9.0                                | 27060311          |
| ECLASS-10.1                               | 27060311          |
| ECLASS-11.1                               | 27060311          |

|                       |               |
|-----------------------|---------------|
| ECLASS-12.0           | 27060311      |
| ETIM-5.0              | EC001855      |
| customs tariff number | 85444290      |
| GTIN                  | 4048879159494 |
| Pakke-enhed           | 1             |

#### Electrical data | Supply

|                                       |      |
|---------------------------------------|------|
| Operating voltage DC                  | 24 V |
| Operating voltage DC min.             | 18 V |
| Operating voltage DC max.             | 30 V |
| Operating voltage DC max. (UL-listed) | 30 V |
| Current operating per contact max.    | 4 A  |
| Current consumption max.              | 5 mA |

#### Diagnostics

|                       |               |
|-----------------------|---------------|
| Status indication LED | green, yellow |
|-----------------------|---------------|

#### Device protection | Electrical

|                                        |                   |
|----------------------------------------|-------------------|
| Additional condition protection degree | inserted, screwed |
| Pollution Degree                       | 3                 |
| Rated surge voltage                    | 0,8 kV            |
| Material group (IEC 60664-1)           | I                 |

#### Mechanical data | Material data

|                           |                  |
|---------------------------|------------------|
| Coating locking           | Nickeled         |
| Coating of fitting        | nickel plated    |
| Material gasket           | FKM              |
| Locking material          | Zinc die-casting |
| Material screw connection | Zinc die-casting |

#### Mechanical data | Mounting data

|                 |                                       |
|-----------------|---------------------------------------|
| Mounting method | inserted, screwed, Shaking protection |
|-----------------|---------------------------------------|

#### Environmental characteristics | Climatic

|                                        |                            |
|----------------------------------------|----------------------------|
| Operating temperature min.             | -25 °C                     |
| Operating temperature max.             | 85 °C                      |
| Additional condition temperature range | depending on cable quality |

#### Important installation notes

|                        |                                                                                                                                                       |
|------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------|
| Note on strain relief  | Protect the connectors by suitable measures from mechanical loads, e.g. by the usage of cable ties.                                                   |
| Note on bending radius | <b>Attention:</b> Observe the permissible bending radii when laying cables, as the IP protection class can be endangered by excessive bending forces. |

#### Conformity

|                  |                                                   |
|------------------|---------------------------------------------------|
| Product standard | DIN EN 61076-2-101 (M12), DIN EN 61076-2-114 (M8) |
|------------------|---------------------------------------------------|

#### Installation | Cable

|                                   |                                                  |
|-----------------------------------|--------------------------------------------------|
| Cable identification              | 610                                              |
| Cable Type                        | 1                                                |
| Jacket Color                      | black                                            |
| Type of Certificate               | cURus                                            |
| Amount stranding                  | 1                                                |
| Stranding                         | 3 wires twisted                                  |
| wire arrangement                  | brown, black, blue                               |
| Cable weight                      | 29,37 g/m                                        |
| Material jacket                   | PVC                                              |
| Shore hardness jacket             | 85 ± 5 Shore A                                   |
| Freedom from ingredients (jacket) | lead-free, cadmium-free, CFC-free, silicone-free |
| Outer-diameter (jacket)           | 4,5 mm                                           |
| Tolerance outer diameter (sheath) | ± 5 %                                            |

|                                                         |                                                      |
|---------------------------------------------------------|------------------------------------------------------|
| Material wire insulation                                | PVC                                                  |
| Amount wires                                            | 3                                                    |
| Outer diameter insulation                               | 1,25 mm                                              |
| Outer diameter tolerance core insulation                | ± 5 %                                                |
| Shore hardness wire insulation                          | 45 ± 5 Shore D                                       |
| Material properties wire insulation                     | good machinability                                   |
| Ingredient freeness wire insulation                     | lead-free, cadmium-free, CFC-free, silicone-free     |
| Amount strands (wire)                                   | 14                                                   |
| Diameter of single wires                                | 0,15 mm                                              |
| Conductor crosssection (wire)                           | 0,25 mm <sup>2</sup>                                 |
| Material conductor wire                                 | Stranded copper wire, bare                           |
| Conductor type (wire)                                   | Strand class 5                                       |
| Current load capacity (standard)                        | to DIN VDE 0298-4                                    |
| Current load capacity min. wire                         | 4,5 A                                                |
| Electrical resistance line constant wire                | 79 Ω/km @ 20 °C                                      |
| Nominal voltage power AC max.                           | 300 V                                                |
| Power frequency withstand voltage power (wire - jacket) | 2 kV @ 60 s                                          |
| AC withstand voltage power (wire - wire)                | 2 kV @ 60 s                                          |
| Min. operating temperature (static)                     | -30 °C                                               |
| Max. operating temperature (fixed)                      | 80 °C                                                |
| Operating temperature min. (dynamic)                    | -5 °C                                                |
| Operating temperature max. (dynamic)                    | 80 °C                                                |
| UV resistance                                           | DIN EN ISO 4892-2 A                                  |
| Flame resistance                                        | UL 1581 § 1090   IEC 60332-2-2   UL 1581 § 1100 FT2  |
| chemical resistance                                     | Good, application-related testing                    |
| Gasoline resistance                                     | Good, application-related testing                    |
| Oil resistance                                          | Good, application-related testing   DIN EN 60811-404 |
| Bending radius (fixed)                                  | 5 x Outer diameter                                   |
| Bending radius (dynamic)                                | 10 x Outer diameter                                  |