

## M12 male 0° / MSUD valve plug A-18mm

PUR 5x0.34 ye UL/CSA+drag ch. 0.6m

### MSUD

The resistance to aggressive media should be individually tested for your application. Further details on request.

Form A (18 mm) – M12, male straight

24 V DC  $\pm 25\%$

LED (yellow/green)

for pressure switches

Attention: Contact carrier turned to 180°!





Art-No. 7005 - M12 Lite - (plastic hexagonal screw) on request

Further cable lengths on request.

Plastic housings with good resistance against chemicals and oils.

### [Link til artikel](#)

#### Billede

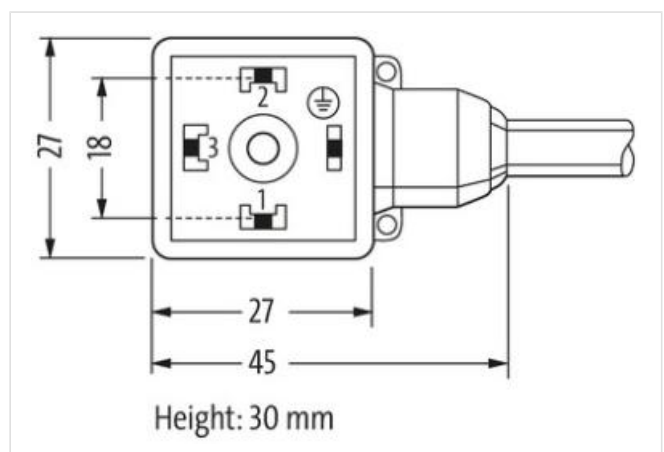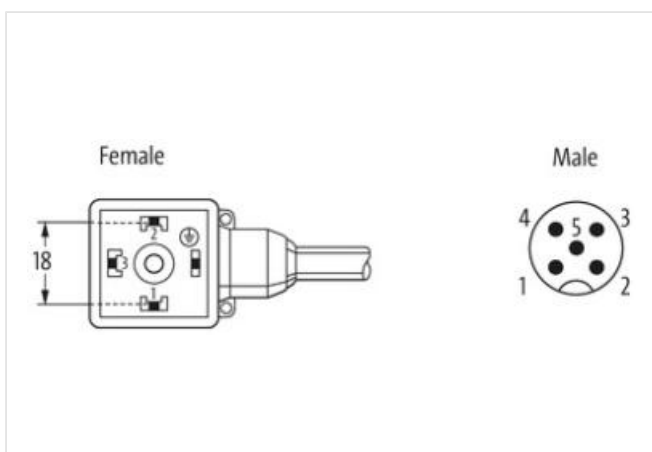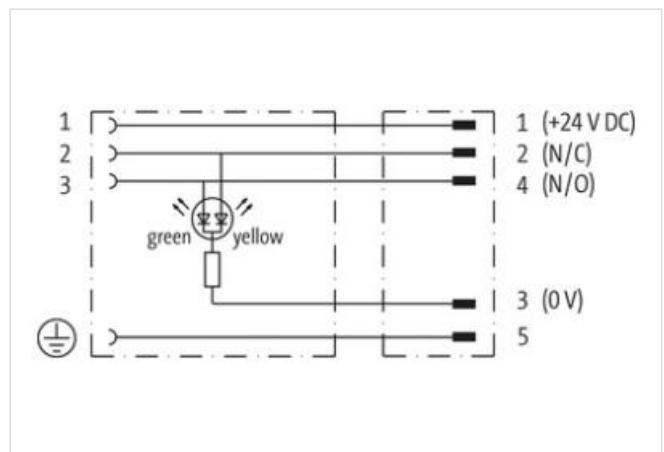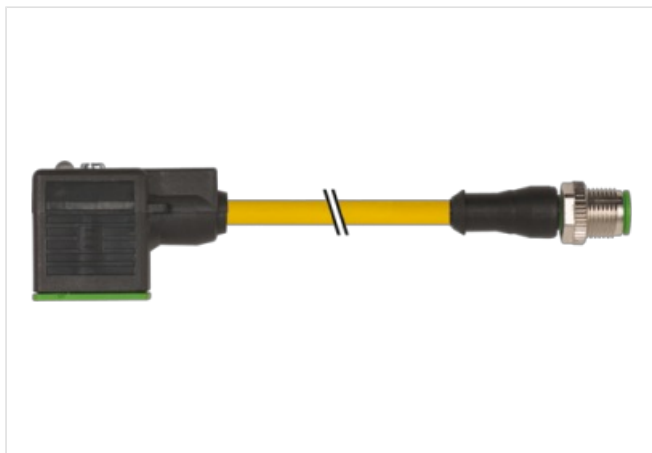



Produktet kan afvige fra billedet



|                                           |               |
|-------------------------------------------|---------------|
| Cable length                              | 0,6 m         |
| Side 1                                    |               |
| Tightening torque                         | 0,4 Nm        |
| Family construction form                  | MSUD          |
| Thread                                    | M3            |
| Material                                  | PUR           |
| Degree of protection (EN IEC 60529)       | IP67          |
| Side 2                                    |               |
| Tightening torque                         | 0,6 Nm        |
| Family construction form                  | M12           |
| Thread                                    | M12 x 1       |
| suitable for corrugated tube (internal Ø) | 10 mm         |
| Material                                  | PBT           |
| Width across flats                        | SW13          |
| Degree of protection (EN IEC 60529)       | IP67          |
| Commercial data                           |               |
| ECLASS-6.0                                | 27279218      |
| ECLASS-7.0                                | 27279218      |
| ECLASS-8.0                                | 27279218      |
| ECLASS-9.0                                | 27060311      |
| ECLASS-10.1                               | 27060312      |
| ECLASS-11.1                               | 27060312      |
| ECLASS-12.0                               | 27060312      |
| ETIM-5.0                                  | EC001855      |
| customs tariff number                     | 85444290      |
| GTIN                                      | 4048879759786 |
| Pakke-enhed                               | 1             |
| Electrical data   Supply                  |               |
| Operating voltage DC                      | 24 V          |
| Operating voltage DC min.                 | 18 V          |
| Operating voltage DC max.                 | 30 V          |
| Current operating per contact max.        | 4 A           |

Current consumption max. 15 mA

#### Diagnostics

Status indication LED green, yellow

#### Device protection | Electrical

Additional condition protection degree inserted, screwed

Pollution Degree 3

Rated surge voltage 0,8 kV

Material group (IEC 60664-1) I

#### Mechanical data | Material data

Coating locking Nickerled

Color housing black

Material gasket PUR

Material housing Plastic

Locking material Zinc die-casting

#### Mechanical data | Mounting data

Mounting method inserted, screwed

#### Environmental characteristics | Climatic

Operating temperature min. -25 °C

Operating temperature max. 85 °C

Additional condition temperature range depending on cable quality

#### Important installation notes

Note on strain relief Protect the connectors by suitable measures from mechanical loads, e.g. by the usage of cable ties.

Note on bending radius **Attention:** Observe the permissible bending radii when laying cables, as the IP protection class can be endangered by excessive bending forces.

#### Installation | Cable

Cable identification 035

Cable Type 3

Jacket Color yellow

Type of Certificate cURus

Amount stranding 1

Stranding 5 wires around Core filler twisted

Filler yes

wire arrangement brown, black, blue, white, green-yellow

Cable weight 41,8 g/m

Material jacket PUR

Shore hardness jacket 90 ± 5 Shore A

Freedom from ingredients (jacket) lead-free, cadmium-free, CFC-free, halogen-free, silicone-free

Outer-diameter (jacket) 4,8 mm

Tolerance outer diameter (sheath) ± 5 %

Material wire insulation PP

Amount wires 5

Outer diameter insulation 1,25 mm

Outer diameter tolerance core insulation ± 5 %

Shore hardness wire insulation 70 ± 5 Shore D

Ingredient freeness wire insulation lead-free, cadmium-free, CFC-free, halogen-free, silicone-free

Amount strands (wire) 42

Diameter of single wires 0,1 mm

Conductor crosssection (wire) 0,34 mm²

Material conductor wire Stranded copper wire, bare

Conductor type (wire) strand class 6

Traversing distance (C-track) 10 m @ 25 °C | horizontal

|                                                   |                                                      |
|---------------------------------------------------|------------------------------------------------------|
| Nominal voltage AC max.                           | 300 V                                                |
| Current load capacity (standard)                  | to DIN VDE 0298-4                                    |
| Current load capacity min. wire                   | 4,5 A                                                |
| Electrical resistance line constant wire          | 57 $\Omega$ /km @ 20 °C                              |
| AC withstand voltage (wire - wire)                | 2,5 kV @ 60 s                                        |
| Power frequency withstand voltage (wire - jacket) | 2,5 kV @ 60 s                                        |
| Min. operating temperature (static)               | -40 °C                                               |
| Max. operating temperature (fixed)                | 80 °C / 90 °C @ 10000 h Operation                    |
| Operating temperature min. (dynamic)              | -25 °C                                               |
| Operating temperature max. (dynamic)              | 80 °C / 90 °C @ 10000 h Operation                    |
| Flame resistance                                  | UL 1581 § 1100 FT2   IEC 60332-2-2   UL 1581 § 1090  |
| chemical resistance                               | Good, application-related testing                    |
| Gasoline resistance                               | Good, application-related testing                    |
| Oil resistance                                    | DIN EN 60811-404   Good, application-related testing |
| Bending radius (fixed)                            | 5 x Outer diameter                                   |
| Bending radius (dynamic)                          | 10 x Outer diameter                                  |
| Travel speed (C-track)                            | 10 Mio. @ 25 °C                                      |
| No. of torsion cycles                             | 2 Mio.                                               |
| Torsion stress                                    | $\pm 180$ °/m                                        |
| Torsion speed                                     | 35 cycles/min                                        |