

**M12 male 0° / M12 female 0° A-cod.**

PVC 12x0.14 bk 12m

Male straight – female straight

M12 – M12, 12-pole

Art-No. 7005 - M12 Lite - (plastic hexagonal screw) on request



Plastic housings with good resistance against chemicals and oils.

The resistance to aggressive media should be individually tested for your application. Further details on request.

Further cable lengths on request.

[Link til artikel](#)**Billede**

|    |           |    |
|----|-----------|----|
| 1  | brown     | 1  |
| 2  | blue      | 2  |
| 3  | white     | 3  |
| 4  | green     | 4  |
| 5  | pink      | 5  |
| 6  | yellow    | 6  |
| 7  | black     | 7  |
| 8  | gray      | 8  |
| 9  | red       | 9  |
| 10 | violet    | 10 |
| 11 | gray/pink | 11 |
| 12 | red/blue  | 12 |

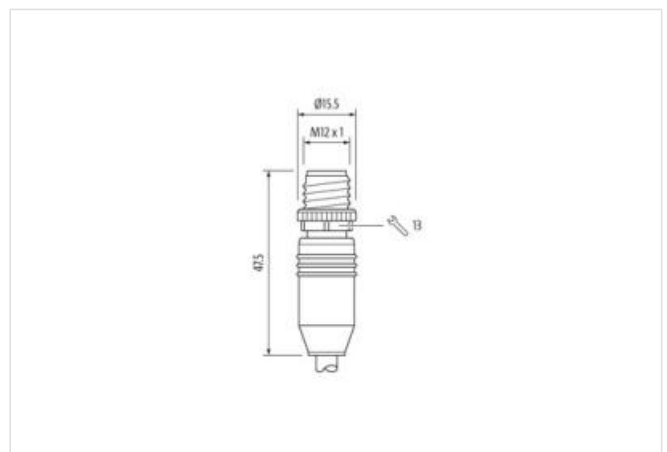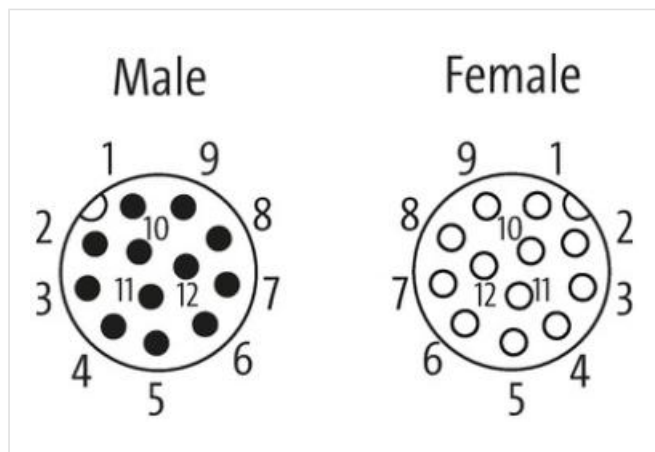



Produktet kan afvige fra billedet



|                                        |                         |
|----------------------------------------|-------------------------|
| Cable length                           | 12 m                    |
| Side 1                                 |                         |
| Tightening torque                      | 0,6 Nm                  |
| Mounting method                        | inserted, screwing      |
| Family construction form               | M12                     |
| Thread                                 | M12 x 1                 |
| Width across flats                     | SW13                    |
| Side 2                                 |                         |
| Tightening torque                      | 0,6 Nm                  |
| Mounting method                        | inserted, screwing      |
| Thread                                 | M12 x 1                 |
| Commercial data                        |                         |
| ECLASS-6.0                             | 27279218                |
| ECLASS-6.1                             | 27279218                |
| ECLASS-7.0                             | 27279218                |
| ECLASS-8.0                             | 27279218                |
| ECLASS-9.0                             | 27060311                |
| ECLASS-10.1                            | 27060311                |
| ECLASS-11.1                            | 27060311                |
| ECLASS-12.0                            | 27060311                |
| ETIM-5.0                               | EC001855                |
| customs tariff number                  | 85444290                |
| GTIN                                   | 4048879825559           |
| Pakke-enhed                            | 1                       |
| Electrical data   Supply               |                         |
| Operating voltage AC max.              | 30 V                    |
| Operating voltage DC max.              | 30 V                    |
| Current operating per contact max.     | 1,5 A                   |
| Device protection   Electrical         |                         |
| Degree of protection (EN IEC 60529)    | IP65, IP67, IP68, IP66K |
| Additional condition protection degree | inserted, screwed       |

|                              |        |
|------------------------------|--------|
| Pollution Degree             | 3      |
| Rated surge voltage          | 0,8 kV |
| Material group (IEC 60664-1) | II     |

**Mechanical data | Material data**

|                  |                  |
|------------------|------------------|
| Coating locking  | Nickeled         |
| Locking material | Zinc die-casting |

**Mechanical data | Mounting data**

|                 |                                       |
|-----------------|---------------------------------------|
| Mounting method | inserted, screwed, Shaking protection |
|-----------------|---------------------------------------|

**Environmental characteristics | Climatic**

|                                        |                            |
|----------------------------------------|----------------------------|
| Operating temperature min.             | -25 °C                     |
| Operating temperature max.             | 85 °C                      |
| Additional condition temperature range | depending on cable quality |

**Important installation notes**

|                        |                                                                                                                                                       |
|------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------|
| Note on strain relief  | Protect the connectors by suitable measures from mechanical loads, e.g. by the usage of cable ties.                                                   |
| Note on bending radius | <b>Attention:</b> Observe the permissible bending radii when laying cables, as the IP protection class can be endangered by excessive bending forces. |

**Conformity**

|                  |                          |
|------------------|--------------------------|
| Product standard | DIN EN 61076-2-101 (M12) |
|------------------|--------------------------|

**Installation | Cable**

|                                          |                                                      |
|------------------------------------------|------------------------------------------------------|
| Cable identification                     | 493                                                  |
| Jacket Color                             | gray                                                 |
| Amount stranding                         | 1                                                    |
| Stranding                                | 6 wires twisted                                      |
| Cable shielding (type)                   | copper braiding, bare                                |
| Filler                                   | yes                                                  |
| wire arrangement                         | white, brown, green, yellow, gray, pink, blue, red   |
| Cable weight                             | 37,4 g/m                                             |
| Material jacket                          | PUR                                                  |
| Outer-diameter (jacket)                  | 5,2 mm                                               |
| Tolerance outer diameter (sheath)        | ± 5 %                                                |
| Amount wires                             | 6                                                    |
| Outer diameter insulation                | 1,05 mm                                              |
| Outer diameter tolerance core insulation | ± 5 %                                                |
| Amount strands (wire)                    | 18                                                   |
| Diameter of single wires                 | 0,1 mm                                               |
| Conductor crosssection (wire)            | 0,14 mm²                                             |
| Material conductor wire                  | Stranded copper wire, bare                           |
| Min. operating temperature (static)      | -40 °C                                               |
| Max. operating temperature (fixed)       | 80 °C                                                |
| Operating temperature min. (dynamic)     | -5 °C                                                |
| Operating temperature max. (dynamic)     | 80 °C                                                |
| UV resistance                            | DIN EN ISO 4892-2 A                                  |
| Flame resistance                         | UL 1581 § 1100 FT2   UL 1581 § 1090   IEC 60332-2-2  |
| chemical resistance                      | Good, application-related testing                    |
| Gasoline resistance                      | Good, application-related testing                    |
| Oil resistance                           | Good, application-related testing   DIN EN 60811-404 |
| Bending radius (fixed)                   | 10 x Outer diameter                                  |
| Bending radius (dynamic)                 | 10 x Outer diameter                                  |
| Travel speed (C-track)                   | 4 Mio.                                               |