




Adaptor M8 male / M8 female A-cod.

3-pol. / 4-pol., conf. 1,3,4

Adapter  
Male - female  
M8 – M8, 3/4-pole

[Link til artikel](#)

Billede

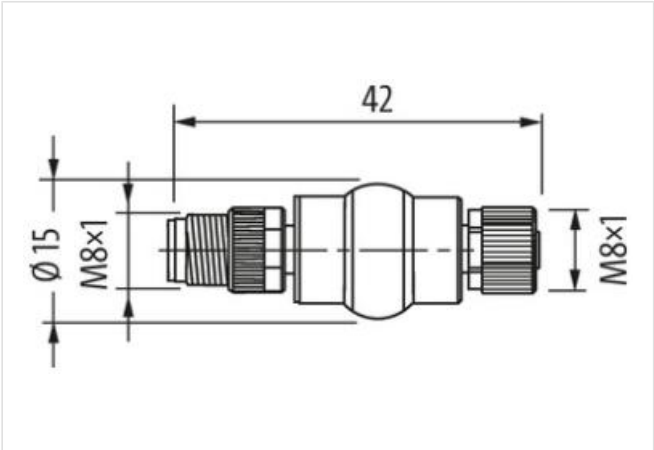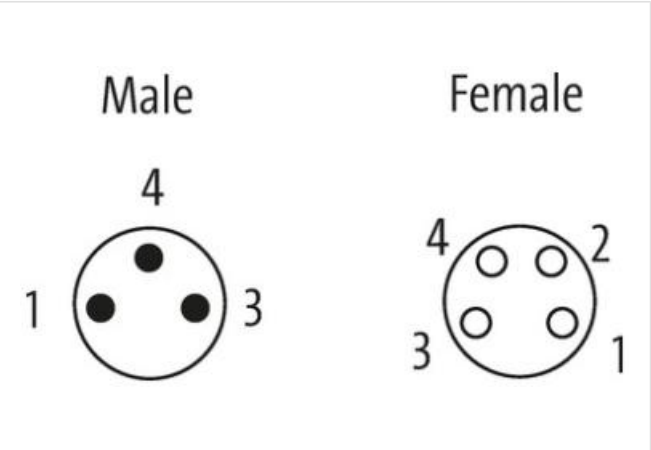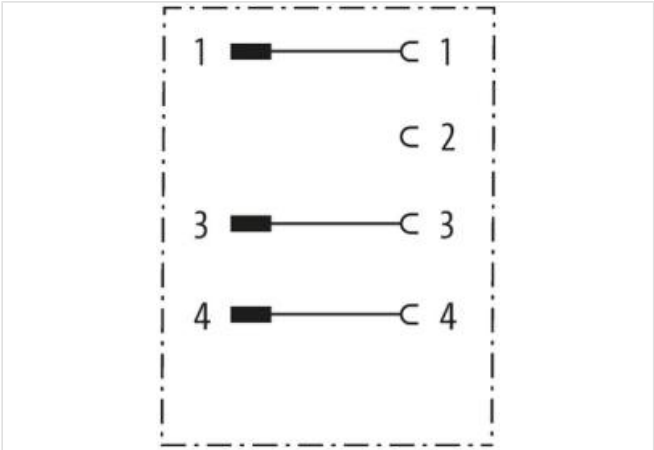

Produktet kan afvige fra billedet



| Side 1                   |          |
|--------------------------|----------|
| Family construction form | M8       |
| Width across flats       | SW9      |
| Commercial data          |          |
| ECLASS-6.0               | 27143423 |
| ECLASS-6.1               | 27260702 |
| ECLASS-7.0               | 27440102 |

|                       |               |
|-----------------------|---------------|
| ECLASS-8.0            | 27440102      |
| ECLASS-9.0            | 27440106      |
| ECLASS-10.1           | 27440102      |
| ECLASS-11.1           | 27440102      |
| ECLASS-12.0           | 27440106      |
| ETIM-5.0              | EC001855      |
| customs tariff number | 85366990      |
| GTIN                  | 4048879118538 |
| Pakke-enhed           | 1             |

**Electrical data | Supply**

|                                       |      |
|---------------------------------------|------|
| Operating voltage AC max.             | 50 V |
| Operating voltage DC max.             | 60 V |
| Operating voltage AC max. (UL-listed) | 30 V |
| Operating voltage DC max. (UL-listed) | 30 V |
| Current operating per contact max.    | 4 A  |

**Installation | Connection**

|                   |         |
|-------------------|---------|
| Tightening torque | 0,6 Nm  |
| Mounting set      | M12 x 1 |

**Device protection | Electrical**

|                                        |                   |
|----------------------------------------|-------------------|
| Degree of protection (EN IEC 60529)    | IP67              |
| Additional condition protection degree | inserted, screwed |
| Pollution Degree                       | 3                 |
| Rated insulation voltage               | 800 V             |
| Rated surge voltage                    | 1,5 kV            |
| Material group (IEC 60664-1)           | I                 |

**Mechanical data | Material data**

|                  |                  |
|------------------|------------------|
| Coating locking  | Nickel           |
| Material housing | PUR              |
| Locking material | Zinc die-casting |

**Mechanical data | Mounting data**

|                 |                                       |
|-----------------|---------------------------------------|
| Mounting method | inserted, screwed, Shaking protection |
|-----------------|---------------------------------------|

**Environmental characteristics | Climatic**

|                            |        |
|----------------------------|--------|
| Operating temperature min. | -25 °C |
| Operating temperature max. | 85 °C  |

**Important installation notes**

|                        |                                                                                                                                                       |
|------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------|
| Note on strain relief  | Protect the connectors by suitable measures from mechanical loads, e.g. by the usage of cable ties.                                                   |
| Note on bending radius | <b>Attention:</b> Observe the permissible bending radii when laying cables, as the IP protection class can be endangered by excessive bending forces. |