


wire bundle MASI

PUR profile cable 2x2.5 ye 100m

PUR (UL/CSA)
suitable for C-tracks
2× 2.5 mm²

Link til artikel

Billede

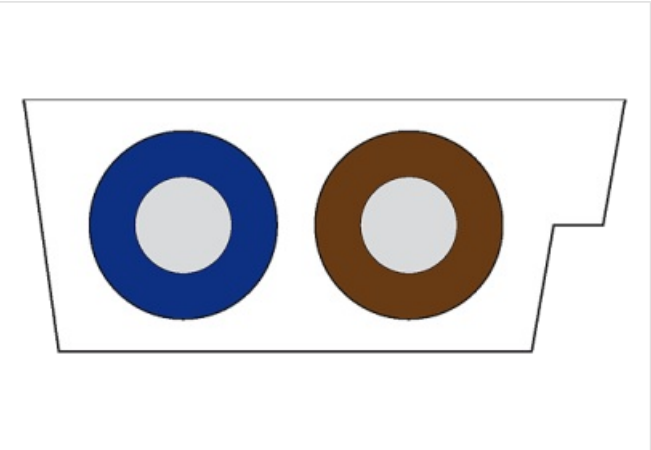

Produktet kan afvige fra billedet

Commercial data	
ECLASS-6.0	27279221
ECLASS-7.0	27440104
ECLASS-8.0	27440104
ECLASS-9.0	27440102
ETIM-5.0	EC001578
customs tariff number	85444995
GTIN	4048879642279
Pakke-enhed	1
Installation Cable	
Cable identification	178
Jacket Color	yellow
wire arrangement	brown, blue
Cable weigth	83,6 g/m
Material jacket	PUR
Material wire insulation	PP
Amount wires	2
Ingredient freeness wire insulation	lead-free, cadmium-free, CFC-free, halogen-free, silicone-free
Travel speed (C-track)	5 Mio.
Amount strands (wire)	140
Diameter of single wires	0,15 mm
Conductor crossection (wire)	2,5 mm²
Material conductor wire	copper stranded wire, tinned
Conductor type (wire)	strand class 6
Nominal voltage AC max.	32 V
Current load capacity (standard)	to DIN VDE 0298-4
Current load capacity min. wire	26 A

Electrical resistance line constant wire	8,2 Ω/km @ 20 °C
Operating temperature min. (dynamic)	-40 °C
Operating temperature max. (dynamic)	80 °C
Flame resistance	UL 1581 § 1090 IEC 60332-2-2 UL 1581 § 1100 FT2
chemical resistance	Good, application-related testing
Gasoline resistance	Good, application-related testing
Oil resistance	DIN EN 60811-404 Good, application-related testing
Bending radius (fixed)	3 x Outer diameter
Bending radius (dynamic)	6 x Outer diameter