



M23 female 0° 17-pole with cable

PUR (3x(2x0,14D)+2x0,5+4x0.14+4x0,22)C 5m

Signal cable for SINAMICS S120 and motors with connection M23  
Female straight  
M23, 17-pole  
shielded  
Further cable lengths on request.  
Plastic housings with good resistance against chemicals and oils.  
The resistance to aggressive media should be individually tested for your application. Further details on request.

Link til artikel

Billede

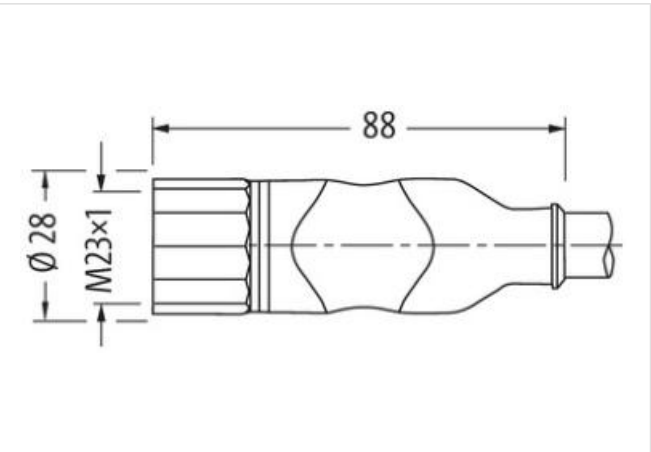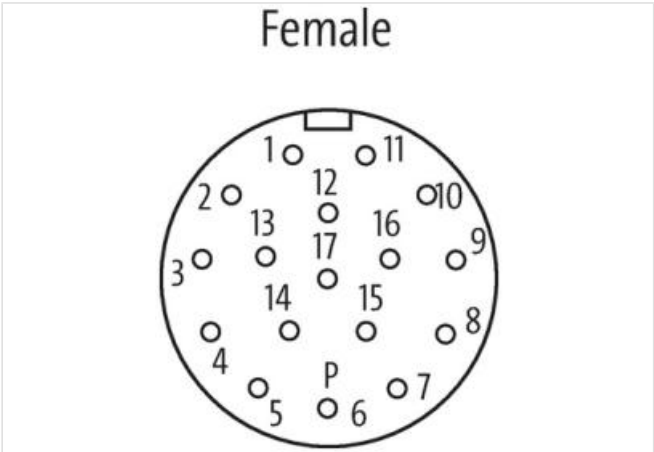

Produktet kan afvige fra billedet

|                   |          |
|-------------------|----------|
| Cable length      | 5 m      |
| Side 1            |          |
| Tightening torque | 2 Nm     |
| Thread            | M23 x 1  |
| Commercial data   |          |
| ECLASS-6.0        | 27279218 |

|                       |               |
|-----------------------|---------------|
| ECLASS-6.1            | 27060307      |
| ECLASS-7.0            | 27060307      |
| ECLASS-8.0            | 27060307      |
| ECLASS-9.0            | 27060307      |
| ECLASS-10.1           | 27060307      |
| ECLASS-11.1           | 27060307      |
| ECLASS-12.0           | 27060307      |
| ETIM-5.0              | EC001855      |
| customs tariff number | 85444290      |
| GTIN                  | 4048879486644 |
| Pakke-enhed           | 1             |

**Electrical data | Supply**

|                           |      |
|---------------------------|------|
| Operating voltage AC max. | 30 V |
| Operating voltage DC max. | 30 V |

**Device protection | Electrical**

|                                     |      |
|-------------------------------------|------|
| Degree of protection (EN IEC 60529) | IP67 |
|-------------------------------------|------|

**Mechanical data | Mounting data**

|                 |                                       |
|-----------------|---------------------------------------|
| Mounting method | inserted, screwed, Shaking protection |
|-----------------|---------------------------------------|

**Environmental characteristics | Climatic**

|                                        |                            |
|----------------------------------------|----------------------------|
| Operating temperature min.             | -25 °C                     |
| Operating temperature max.             | 85 °C                      |
| Additional condition temperature range | depending on cable quality |

**Installation | Cable**

|                                       |                                   |
|---------------------------------------|-----------------------------------|
| Cable identification                  | 811                               |
| Jacket Color                          | black                             |
| Amount stranding                      | 2                                 |
| Stranding                             | 4 wires twisted                   |
| Amount stranding (type 2)             | 1                                 |
| Stranding (type 2)                    | 2 wires twisted                   |
| Amount stranding (type 3)             | 3                                 |
| Stranding (type 3)                    | 2 wires with Filler twisted       |
| Cable shielding (type)                | copper braiding, bare             |
| Banding                               | Foil                              |
| Filler                                | yes                               |
| wire arrangement                      | brown, black, blue, white         |
| Material jacket                       | PUR                               |
| Freedom from ingredients (jacket)     | lead-free, CFC-free, halogen-free |
| Outer-diameter (jacket)               | 9,5 mm                            |
| Tolerance outer diameter (sheath)     | ± 5 %                             |
| Material wire insulation              | PP                                |
| Amount wires                          | 10                                |
| Outer diameter insulation             | 0,85 mm                           |
| Shore hardness wire insulation        | 65 ± 5 Shore D                    |
| Amount strands (wire)                 | 7                                 |
| Diameter of single wires              | 0,16 mm                           |
| Conductor crosssection (wire)         | 0,14 mm <sup>2</sup>              |
| Material conductor wire               | Stranded copper wire, bare        |
| Outer diameter wire insulation (Data) | 2 mm                              |
| Amount wires (Data)                   | 4                                 |
| Amount strands wire (Data)            | 7                                 |
| Diameter of single wires (Data)       | 0,127 mm                          |
| Conductor crosssection wire (Data)    | 0,22 mm <sup>2</sup>              |

|                                           |                                                      |
|-------------------------------------------|------------------------------------------------------|
| Material conductor wire (Data)            | copper stranded wire, tinned                         |
| Nominal voltage AC max.                   | 300 V                                                |
| Current load capacity (standard)          | to DIN VDE 0298-4                                    |
| Electrical resistance line constant wire  | 148,9 Ω/km @ 20 °C                                   |
| Electrical resistance coating wire (Data) | 93,3 Ω/km @ 20 °C                                    |
| Operating temperature min. (dynamic)      | -25 °C                                               |
| Operating temperature max. (dynamic)      | 80 °C                                                |
| UV resistance                             | DIN EN ISO 4892-2 A                                  |
| Flame resistance                          | IEC 60332-2-2   UL 1581 § 1100 FT2   UL 1581 § 1090  |
| chemical resistance                       | Good, application-related testing                    |
| Gasoline resistance                       | Good, application-related testing                    |
| Oil resistance                            | DIN EN 60811-404   Good, application-related testing |
| Bending radius (installation)             | x Outer diameter                                     |
| Bending radius (fixed)                    | x Outer diameter                                     |
| Bending radius (dynamic)                  | 6 x Outer diameter                                   |
| Travel speed (C-track)                    | 2 Mio.                                               |