


B6 Bulkhead mounted h., IP67

Single locking lever m.

B6
Bulkhead mounted housing
Single locking lever
IP67
Technical data will be only guaranteed with Murrelektronik components.

Link til artikel

Billede

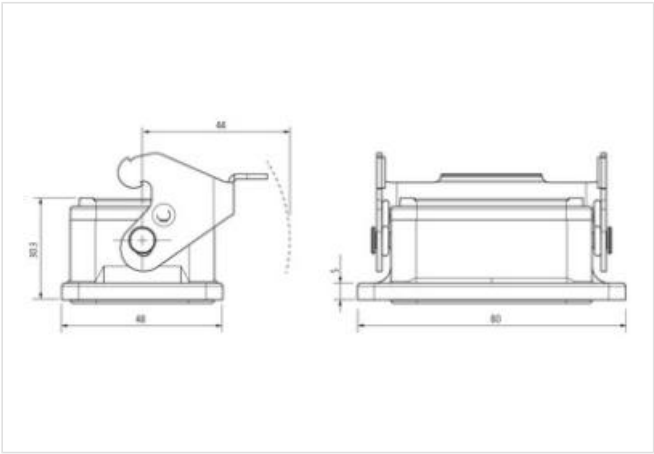

Produktet kan afvige fra billedet

Commercial data	
ECLASS-6.0	27143424
ECLASS-6.1	27261203
ECLASS-7.0	27440202
ECLASS-8.0	27440202
ECLASS-9.0	27440202
ECLASS-10.1	27440202
ECLASS-11.1	27440202
ECLASS-12.0	27440202
ETIM-5.0	EC000437
customs tariff number	85389099
GTIN	4048879647205
Pakke-enhed	1
Installation Connection	
Mating cycles min.	500
Device protection Electrical	
Degree of protection (EN IEC 60529)	IP67
Additional condition protection degree	inserted, locked
Mechanical data	
Housing type	Bulkhead mounted housing
Mechanical data Material data	
Coating housing	powder-coated
Coating locking	verzinkt
Material gasket	NBR

Material housing	Aluminum die casting
Locking material	Steel

Mechanical data | Mounting data

Size	B6
Height	30,3 mm
Width	48 mm
Depth	80 mm
Looking techniques	Single locking lever

Environmental characteristics | Climatic

Operating temperature min.	-40 °C
Operating temperature max.	100 °C
Climatic category (EN IEC 60068-1)	40/100/21