

B10 Bulkhead mounted h., IP68

Screw locking


B10
Bulkhead mounted housing
Screw locking
IP68
Technical data will be only guaranteed with Murrelektronik components.

Link til artikel

Billede



Produktet kan afvige fra billedet

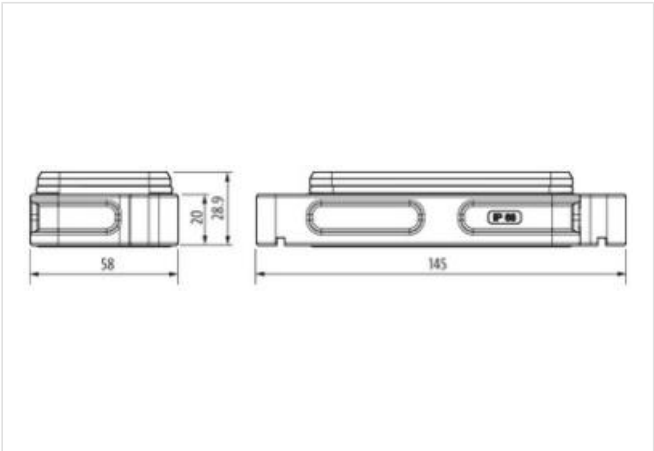

Commercial data

ECLASS-6.0	27143424
ECLASS-6.1	27261203
ECLASS-7.0	27440202
ECLASS-8.0	27440202
ECLASS-9.0	27440202
ECLASS-10.1	27440202
ECLASS-11.1	27440202
ECLASS-12.0	27440202
ETIM-5.0	EC000437
customs tariff number	85389099
GTIN	4048879647366
Pakke-enhed	1

Installation | Connection

Mating cycles min.	500
--------------------	-----

Device protection | Electrical

Degree of protection (EN IEC 60529)	IP68
Additional condition protection degree	inserted, locked

Mechanical data

Housing type	Bulkhead mounted housing
--------------	--------------------------

Mechanical data | Material data

Coating housing	powder-coated
Material gasket	Silicon
Material housing	Aluminum die casting

Locking material Stainless steel

Mechanical data | Mounting data

Size	B10
Mounting method	Screw locking
Height	28,9 mm
Width	58 mm
Depth	145 mm

Environmental characteristics | Climatic

Operating temperature min.	-40 °C
Operating temperature max.	125 °C
Climatic category (EN IEC 60068-1)	40/125/21