


B24 Bulkhead mounted h., IP68

Screw locking

B24
Bulkhead mounted housing
Screw locking
IP68
Technical data will be only guaranteed with Murrelektronik components.

Link til artikel

Billede

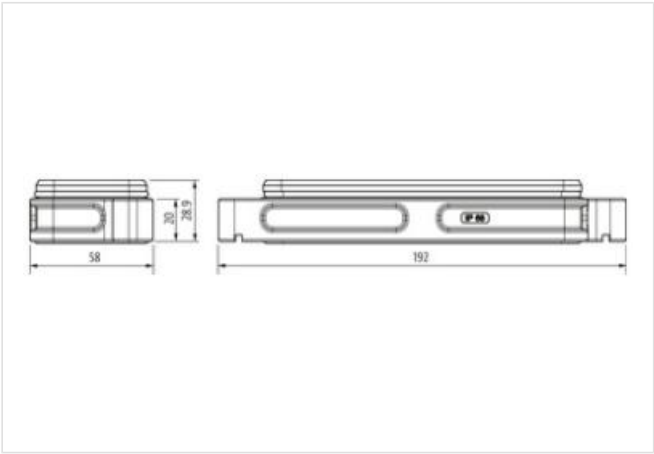

Produktet kan afvige fra billedet

Commercial data

ECLASS-6.0	27143424
ECLASS-6.1	27261203
ECLASS-7.0	27440202
ECLASS-8.0	27440202
ECLASS-9.0	27440202
ECLASS-10.1	27440202
ECLASS-11.1	27440202
ECLASS-12.0	27440202
ETIM-5.0	EC000437
customs tariff number	85389099
GTIN	4048879647441
Pakke-enhed	1

Installation | Connection

Mating cycles min.	500
--------------------	-----

Device protection | Electrical

Degree of protection (EN IEC 60529)	IP68
Additional condition protection degree	inserted, locked

Mechanical data

Housing type	Bulkhead mounted housing
--------------	--------------------------

Mechanical data | Material data

Coating housing	powder-coated
Material gasket	Silicon
Material housing	Aluminum die casting

Mechanical data Mounting data	
Size	B24
Mounting method	Screw locking
Height	28,9 mm
Width	58 mm
Depth	192 mm
Environmental characteristics Climatic	
Operating temperature min.	-40 °C
Operating temperature max.	125 °C
Climatic category (EN IEC 60068-1)	40/125/21