


Double locking lever, top entry M25

[Link til artikel](#)

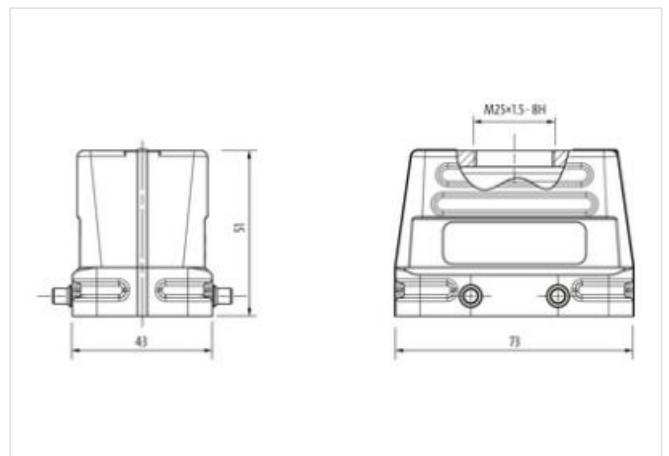

Commercial data

Installation

Installation | Connection

Device protection | Electrical

Mechanical data

Oplysningerne i dette datablad er udarbejdet med størst mulig omhu.
Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 20.05.2024

Murrelektronik ApS | Alexander Foss Gade 13. 1. | 9000 Aalborg | Fon +45 96 35 06 06 | Fax | shop@murrelektronik.dk | shop.murrelektronik.dk

Mechanical data Material data	
Coating housing	powder-coated
Coating locking	verzinkt
Material housing	Aluminum die casting
Locking material	Steel
Mechanical data Mounting data	
Size	B10
Height	51 mm
Width	43 mm
Depth	73 mm
Locking techniques	Double locking lever
Environmental characteristics Climatic	
Operating temperature min.	-40 °C
Operating temperature max.	100 °C
Climatic category (EN IEC 60068-1)	40/100/21